















2014 CATALOG
INDUSTRIAL CARTS,
WORKBENCHES & STORAGE

Manufactured by
Brennan Equipment and Manufacturing Company
www.LittleGiant-USA.com



Quick Reference Index

Item		Page
Carts & Shelf Trucks		3-16
Platform Trucks		17-24
Wagons & Trailers		25-29
Nursery Carts		30-31
Dollies, Sheet & Panel, Bar & Pipe Trucks		32-41
Storage & Security		42-51
Bulk Handling & Storage		52-62
Mobile Tables & Mobile Bench Cabinets		63-68
Workbenches & Shop Tables		69-79
Secondary Containment & Safety		80-83
Hand Trucks & Gas Cylinder Handling		84-90
Wheels		91

SPECIFICATIONS: If any particular dimension or specification is critical, it should be verified at time of order placement.

CAPACITIES: All capacities are based on Uniformly Distributed Loads (UDL). Do not exceed load capacities.

WARRANTY: Any product that has been subjected to normal use for which it is intended and is shown to be defective within one (1) year from date of purchase will be repaired or replaced at seller's option, provided such defect is reported promptly to the manufacturer. Authorization is required prior to returning.

LITTLE GIANT PRODUCTS

Manufactured by
Brennan Equipment & Mfg. Inc.
 730 Central Ave.
 University Park, IL 60484
 Phone (708) 534-5500
 FAX (708) 534-5520
www.LittleGiant-USA.com





Mobile Instrument Cart

1000 lbs. Capacity

This cushion-load cart is ideally suited for transporting delicate equipment or sensitive devices. Non-Conductive and sound-deadening wood composite top shelf has a full perimeter non-marking bumper to protect walls and furniture. Both the top shelf and lower shelf are covered with a non-slip vinyl surface. Top shelf measures 22"W x 36"L x 35"H, Lower Shelf 21-3/4"W x 29"L. Powder coated gray finish.

CHOICE OF CASTERS

FULL PNEUMATIC – (2 swivel and 2 rigid) Shock absorbing wheels provide an air cushion ride. Inflation pressure of tires can be adjusted to provide the desired level of shock load reduction for different floor and load conditions.

POLYURETHANE TREAD – (4 swivel) Non-marking polyurethane tread for greater maneuverability under heavier load conditions, and where cushioning of shock loads is not as important.

Model No.	Casters	Shelf Clearance	Wt.
MIC-2436	9" x 3" Pneumatic 2-swivel & 2-rigid	20"	90
MIC-2436-5	5" x 1-1/4" Polyurethane 4-swivel	25"	82
MIC-2436-5TL	5" x 1-1/4" Polyurethane 4-swivel with total lock	25"	83
MIC-2436-10SR	10" x 2-3/4" Solid Rubber 2-swivel & 2 rigid	20"	100



**Model
MIC-2436**



**These carts feature
NON-SLIP SHELVES
with Protective Bumper**



**Available with
Total Lock Casters**

Instrument Cart with Drawer

Includes 13"W x 17"D x 4-1/2"H storage drawer with cylinder lock for added security. Powder coated gray finish.

Model No.	Casters	Shelf Clearance	Wt.
MIC-2436-DR	9" x 3" Pneumatic 2-swivel & 2-rigid	13"	108
MIC-2436-5-DR	5" x 1-1/4" Polyurethane 4-swivel	18"	100
MIC-2436-10SRDR	10" x 2-3/4" Solid Rubber 2-swivel & 2 rigid	13"	118



**Model
MIC-2436-5-DR**

ELECTRICALLY WIRED

Mobile Work Center

With wheel brakes and storage drawer

Features UL listed 15 amp Power Tap with 6 grounded outlets, circuit breaker, switch, 15 ft. power cord and built-in cord wrap. Generous 13"W x 17"D x 4-1/2"H storage drawer with cylinder lock provides added security. Wheel brakes on swivel casters prevent unwanted movement. Powder coated gray finish.

Model No.	Casters	Shelf Clearance	Wt.
MIC-8BK-PSDR	9" x 3" Pneumatic 2 swivel w/brakes & 2-rigid	13"	113
MIC-5BK-PSDR	5" x 1-1/4" Polyurethane 4 swivel w/brakes	18"	105
MIC-5TL-PSDR	5" x 1-1/4" Polyurethane 4-swivel with total lock	18"	106
MIC-10SRBK-PSDR	10" x 2-3/4" Solid Rubber 2-swivel w/brakes & 2-rigid	13"	123



**Model
MIC-8BK-PSDR**



Model
GF-2448-9PM

Flush-Handle Instrument Cart

1200 lbs. Capacity

Flush handle allows transporting of oversized items. Provides a cushioned ride with 9" pneumatic casters, 2 swivel, 2 rigid. Top shelf 34" high. Shelves are available with a 1-1/2" retaining lip or with flush edges. Available with non-slip vinyl shelf surfaces, or smooth steel. Shelf clearance 18" with lipped shelves, 19-1/2" with flush shelves. Powder coated gray finish.

Shelf Size	LIP SHELVES Model No.	FLUSH SHELVES Model No.	Wt.
Non-Slip Vinyl Shelf Surfaces			
24 x 36	GLF-2436-9PM	GF-2436-9PM	96
24 x 48	GLF-2448-9PM	GF-2448-9PM	111
30 x 48	GLF-3048-9PM	GF-3048-9PM	131
Without Vinyl Shelf Surfaces			
24 x 36	GLF-2436-9P	GF-2436-9P	92
24 x 48	GLF-2448-9P	GF-2448-9P	106
30 x 48	GLF-3048-9P	GF-3048-9P	124

Wheel brake option, add: **-BK**



Model
3G-2448-9PM

Three-Shelf Instrument Carts

1200 lbs. Capacity

Provides cushioned transport with 2 swivel and two rigid 9" pneumatic casters. Overall height 45". Shelf clearance 13-3/4" with lip shelves, 14-1/2" with flush shelves. All-welded construction with durable powder coated gray finish.

Shelf Size	LIP SHELVES Model No.	FLUSH SHELVES Model No.	Wt.
Non-Slip Vinyl Shelf Surfaces			
24 x 36	3GL-2436-9PM	3G-2436-9PM	124
24 x 48	3GL-2448-9PM	3G-2448-9PM	147
30 x 48	3GL-3048-9PM	3G-3048-9PM	172
Without Vinyl Shelf Surfaces			
24 x 36	3GL-2436-9P	3G-2436-9P	118
24 x 48	3GL-2448-9P	3G-2448-9P	139
30 x 48	3GL-3048-9P	3G-3048-9P	162

Wheel brakes on swivel casters option, add: **-BK**



Model
IP-2448-9PM

Mobile Instrument Table

1200 lbs. Capacity

Maneuvers over rough surfaces with 4 swivel casters and 9" pneumatic wheels. Available with non-slip vinyl shelf surfaces, or smooth steel. Welded construction for maximum durability. Top shelf height 34", shelf clearance 19-1/2". Powder coated gray finish.

Shelf Size	Model No.	Wt.
Non-Slip Vinyl Shelf Surfaces		
24 x 36	IP-2436-9PM	96
24 x 48	IP-2448-9PM	112
30 x 48	IP-3048-9PM	131
Without Vinyl Shelf Surfaces		
24 x 36	IP-2436-9P	92
24 x 48	IP-2448-9P	107
30 x 48	IP-3048-9P	124

Wheel brakes on swivel casters option, add: **-BK**



Instrument Cart with Hand Guard

1200 lbs. Capacity

Welded steel construction ships ready for immediate use. Full pneumatic 9" casters provide an air cushion ride. Top shelf height 34". Shelf edges available with 1-1/2" retaining lip, or flush edges. Shelf clearance 18" with lipped shelves, 19-1/2" with flush shelves. Available with non-slip vinyl shelf surfaces, or smooth steel surfaces. Powder coated gray finish.

Shelf Size	LIP SHELVES Model No.	FLUSH SHELVES Model No.	Wt.
Non-Slip Vinyl Shelf Surfaces			
24 x 36	GL-2436-9PM	G-2436-9PM	99
24 x 48	GL-2448-9PM	G-2448-9PM	113
30 x 48	GL-3048-9PM	G-3048-9PM	134
Without Vinyl Shelf Surfaces			
24 x 36	GL-2436-9P	G-2436-9P	95
24 x 48	GL-2448-9P	G-2448-9P	109
30 x 48	GL-3048-9P	G-3048-9P	127

Wheel brakes on swivel casters option, add: **-BK**



**Model
G-2436-9PM**

Instrument Cart with Writing Shelf and Storage Pocket

1200 lbs. Capacity

Convenient writing shelf measures 21" wide x 12" long. Sloped storage pocket measures 14" wide x 12-1/2" long with 4-3/4" access height. 9" pneumatic casters, 2 swivel and 2 rigid. Top shelf height 34", overall height 39". Powder coated gray finish.

Shelf Size	LIP SHELVES Model No.	FLUSH SHELVES Model No.	Wt.
Non-Slip Vinyl Shelf Surfaces			
24 x 36	GL-2436-9PM-WSP	G-2436-9PM-WSP	117
24 x 48	GL-2448-9PM-WSP	G-2448-9PM-WSP	133
Without Vinyl Shelf Surfaces			
24 x 36	GL-2436-9P-WSP	G-2436-9P-WSP	113
24 x 48	GL-2448-9P-WSP	G-2448-9P-WSP	127



**Model
G-2436-9PM-WSP**

Low Deck Instrument Cart

1200 lbs. Capacity

Cushion load 9" pneumatic casters with a 26" Top Shelf height and 11-1/2" shelf clearance. Bottom shelf has 1-1/2" retaining lip. Top shelf available with lip or flush edge. Available with non-slip vinyl shelf surfaces, or smooth steel. All-welded construction with 12 gauge shelves. Powder coated gray finish.

Shelf Size	LIP SHELVES Model No.	FLUSH TOP SHELF Model No.	Wt.
Non-Slip Vinyl Shelf Surfaces			
24 x 36	LKL-2436-9PM	LK-2436-9PM	107
24 x 48	LKL-2448-9PM	LK-2448-9PM	126
30 x 48	LKL-3048-9PM	LK-3048-9PM	140
Without Vinyl Shelf Surfaces			
24 x 36	LKL-2436-9P	LK-2436-9P	105
24 x 48	LKL-2448-9P	LK-2448-9P	123
30 x 48	LKL-3048-9P	LK-3048-9P	135

Wheel brakes on swivel casters option, add: **-BK**



**Model
LK-2448-9PM**



Model
LGL-2436-BRK



Model
3LGL-2436-BRK



Model
LG-2436-BK-2DR



Model
LG-2436-6PY

Welded Service Carts

1200 lbs. or 2000 lbs. Capacity

Little Giant durability in an economical shelf truck. These all-welded units ship fully assembled. Heavy 12 gauge shelves. Bottom shelf has retaining lip for small parts. Top shelf is available with lip up or down (flush top). Available in either 1200 lbs. or 2000 lbs. Capacity. Durable powder coated finish.

1200 lbs. Capacity

5" Non-marking polyurethane casters; OAH 35".

	Shelf Size	LIP SHELVES	FLUSH TOP (& MIDDLE)	Wt.
2 SHELF 25" Shelf Clearance	18 x 24	LGL-1824-BRK	LG-1824-BRK	55
	18 x 32	LGL-1832-BRK	LG-1832-BRK	65
	24 x 36	LGL-2436-BRK	LG-2436-BRK	84
	24 x 48	LGL-2448-BRK	LG-2448-BRK	103
	30 x 48	LGL-3048-BRK	LG-3048-BRK	125
	30 x 60	LGL-3060-BRK	LG-3060-BRK	152
3 SHELF 11-3/4" Clearance	18 x 24	3LGL-1824-BRK	3LG-1824-BRK	72
	18 x 32	3LGL-1832-BRK	3LG-1832-BRK	87
	24 x 36	3LGL-2436-BRK	3LG-2436-BRK	115
	24 x 48	3LGL-2448-BRK	3LG-2448-BRK	150
	30 x 48	3LGL-3048-BRK	3LG-3048-BRK	177

Standard with 2 swivel casters with brakes and 2 rigid casters.

Also available with 4 swivel casters with brakes, add: **-S-BRK**.

With Storage Drawer 1200 lbs. Capacity

Accessory drawer with cylinder lock and 2 keys measures 13" wide x 17" deep x 4-1/2" high, offers secure storage.

	Shelf Size	LIP SHELVES	FLUSH TOP	Wt.
1 Drawer	24 x 36	LGL-2436-BK-DR	LG-2436-BK-DR	97
	24 x 48	LGL-2448-BK-DR	LG-2448-BK-DR	116
2 Drawer	24 x 36	LGL-2436-BK-2DR	LG-2436-BK-2DR	84
	24 x 48	LGL-2448-BK-2DR	LG-2448-BK-2DR	103

2000 lbs. Capacity

6" Non-marking polyurethane casters; OAH 36-1/2".

	Shelf Size	LIP SHELVES	FLUSH TOP (& MIDDLE)	Wt.
2 SHELF 25" Shelf Clearance	24 x 36	LGL-2436-6PY	LG-2436-6PY	97
	24 x 48	LGL-2448-6PY	LG-2448-6PY	116
	30 x 48	LGL-3048-6PY	LG-3048-6PY	138
	30 x 60	LGL-3060-6PY	LG-3060-6PY	165
	24 x 36	3LGL-2436-6PY	3LG-2436-6PY	128
3 SHELF 11-3/4" Clearance	24 x 48	3LGL-2448-6PY	3LG-2448-6PY	163
	30 x 48	3LGL-3048-6PY	3LG-3048-6PY	190
	30 x 60	3LGL-3060-6PY	3LG-3060-6PY	230



Heavy-Duty Shelf Truck

3600 lbs. Capacity

12 gauge shelves handle the heaviest of loads. Shelves available with flush edges, or with 1-1/2" retaining lip. 2 swivel and 2 rigid casters with 6" x 2" hard tread phenolic wheels for added maneuverability under heavy loads. Swivel casters have wheel brakes to stop unwanted movement when loading and unloading. 36" overall height.

	W x L x H	LIP SHELVES 24" Clearance	FLUSH SHELVES 25-1/2" Clearance	Wt.
2 Shelf	24 x 36 x 36	2GL-2436-6PHBK	2G-2436-6PHBK	112
	24 x 48 x 36	2GL-2448-6PHBK	2G-2448-6PHBK	138
	30 x 48 x 36	2GL-3048-6PHBK	2G-3048-6PHBK	154
	30 x 60 x 36	2GL-3060-6PHBK	2G-3060-6PHBK	182
	W x L x H	LIP SHELVES 11" Clearance	FLUSH SHELVES 12" Clearance	Wt.
3 Shelf	24 x 36 x 36	3GL-2436-6PHBK	3G-2436-6PHBK	156
	24 x 48 x 36	3GL-2448-6PHBK	3G-2448-6PHBK	185
	30 x 48 x 36	3GL-3048-6PHBK	3G-3048-6PHBK	201
	30 x 60 x 36	3GL-3060-6PHBK	3G-3060-6PHBK	251

For 6" Mold-on Rubber with Brakes, add wheel code: **-6MRBK** (2000 lbs. Capacity)

For 6" Polyurethane with Brakes, add wheel code: **-6PYBK** (3600 lbs. Capacity)

Floor Lock Option, add: **-FL**



**Model
2G-2448-6PHBK**



**Model
3G-2436-6PHBK**

Extra-Heavy-Duty Shelf Truck

5000 lbs. Capacity

All-welded construction features flush 12 gauge steel shelves with extra reinforcement and 2" x 2" corner angles for increased capacity. Top shelf is 36" high. Clearance between shelves is 23" for 2-shelf models, and 10-1/2" for 3-shelf models. Easily maneuverable with heavy-duty 8" phenolic wheels. Durable powder coated finish.

Shelf Size	2 SHELVES Model No.	Wt.	3 SHELVES Model No.	Wt.
24 x 36	GH-8V2-1	160	3GH-8V2-1	192
24 x 48	GH-8V2-2	175	3GH-8V2-2	217
24 x 60	GH-8V2-7	185	3GH-8V2-7	237
30 x 48	GH-8V2-5	193	3GH-8V2-5	245
30 x 60	GH-8V2-4	219	3GH-8V2-4	283
30 x 72	GH-8V2-8	259	3GH-8V2-8	335
36 x 72	GH-8V2-6	280	3GH-8V2-6	370

4 swivel caster option, add: **-BKPL** (2 with wheel brakes, and 2 with swivel locks that convert from swivel to rigid casters)

Floor Lock Option, add: **-FL** (Stops unwanted movement when loading or unloading)



**Model
GH-8V2-2BKPL**



**Model
3GH-8V2-5FL
with Floor Lock Option**



Optional 4 Position
Swivel Lock



Optional Floor Lock




**Model
GL-2448-8MR**



Floor Lock Option, add: **-FL**
Stops unwanted movement when loading or unloading

Flush Shelves



Lip Shelves

Flush Shelves "G-"

Models have flush shelves for easier loading and unloading of larger, more bulky items.

Lip Shelves "GL-"

Models feature 1-1/2" lip to retain small parts.



**Model
G-2448-10SR**



9" x 3"
Pneumatic Casters

Merchandise Collectors

2000 lbs. to 3600 lbs. Capacity

Shelves are formed from 12 gauge steel with structural angle corners and shelf reinforcements on shelves longer than 36". Shelves are available with 1-1/2" lip, or with flush edges. Raised offset handle includes cross brace hand guard for added safety. These welded units are shipped set up and ready for immediate use, with 2 swivel and 2 rigid casters. Shelf clearance 18" with lipped shelves, 19-1/2" with flush shelves.

Capacity & Wheels	Shelf Size W x L	Lip Edge Shelves Model No.	Flush Edge Shelves Model No.	Wt.
8" x 2" Polyurethane w/Brakes 3600 lbs. Top Shelf 32" H	24 x 36	GL-2436-8PYBK	G-2436-8PYBK	111
	24 x 48	GL-2448-8PYBK	G-2448-8PYBK	136
	30 x 48	GL-3048-8PYBK	G-3048-8PYBK	154
	30 x 60	GL-3060-8PYBK	G-3060-8PYBK	180
8" x 2" Mold-on Rubber Tired 2400 lbs. Top Shelf 32" H	24 x 36	GL-2436-8MR	G-2436-8MR	128
	24 x 48	GL-2448-8MR	G-2448-8MR	153
	30 x 48	GL-3048-8MR	G-3048-8MR	171
	30 x 60	GL-3060-8MR	G-3060-8MR	197
6" x 2" Mold-on Rubber Tired 2000 lbs. Top Shelf 30" H	24 x 36	GL-2436-6MR	G-2436-6MR	120
	24 x 48	GL-2448-6MR	G-2448-6MR	145
	30 x 48	GL-3048-6MR	G-3048-6MR	163
	30 x 60	GL-3060-6MR	G-3060-6MR	189

Cushion-Load Merchandise Collectors

Cushion-load casters for use over rough or uneven surfaces. Raised offset handle with cross brace hand guard for added safety. Heavy gauge shelves with 1-1/2" lip or flush edges. Shelf clearance 18" with lipped shelves, 19-1/2" with flush shelves. All-welded construction (except casters) with durable powder coated gray finish.

Capacity & Wheels	Shelf Size W x L	Lip Edge Shelves Model No.	Flush Edge Shelves Model No.	Wt.
9" x 3" Pneumatic 1200 lbs. Top Shelf 34" H	24 x 36	GL-2436-9P	G-2436-9P	95
	24 x 48	GL-2448-9P	G-2448-9P	109
	30 x 48	GL-3048-9P	G-3048-9P	127
	30 x 60	GL-3060-9P	G-3060-9P	143
10" x 2.75" Puncture-Proof Rubber 1500 lbs. Top Shelf 34-1/2" H	24 x 36	GL-2436-10SR	G-2436-10SR	104
	24 x 48	GL-2448-10SR	G-2448-10SR	118
	30 x 48	GL-3048-10SR	G-3048-10SR	136
	30 x 60	GL-3060-10SR	G-3060-10SR	152

Floor Lock Option, add: **-FL**



Ergonomic Shelf Trucks

1200 lbs. Capacity

Ergonomic handle provides a more natural, comfortable grip that reduces wrist strain. Unique design also functions as a hand guard for added protection. The 2 swivel and 2 rigid 5" x 1-1/4" casters with non-marking polyurethane wheels provide the best combination of reduced rolling resistance and quiet operation. Wheel brakes on swivel casters are standard. All-welded construction with heavy 12 gauge shelves, these units ship fully assembled and ready for use. Bottom shelf has a 1-1/2" retaining lip for small parts. Top shelf is 35" above ground, and is available with lip up or down (flush top).

	Shelf Size	Lip Edge Shelves	Flush Top (& Center)	Wt.
2 SHELF 25" Shelf Clearance	24 x 36	ERLGL-2436-BRK	ERLG-2436-BRK	85
	24 x 48	ERLGL-2448-BRK	ERLG-2448-BRK	104
	30 x 48	ERLGL-3048-BRK	ERLG-3048-BRK	126
	30 x 60	ERLGL-3060-BRK	ERLG-3060-BRK	155
3 SHELF 11-3/4" Clearance	24 x 36	3ERLGL-2436-BRK	3ERLG-2436-BRK	124
	24 x 48	3ERLGL-2448-BRK	3ERLG-2448-BRK	154
	30 x 48	3ERLGL-3048-BRK	3ERLG-3048-BRK	183



**Model
ERLG-2436-BRK**



**Model
3ERLG-2436-BRK**

Heavy-Duty Ergonomic Shelf Trucks

3600 lbs. Capacity

Ergonomic handle provides a more natural, comfortable grip. Heavy-duty design also functions as a hand guard for added protection. The 2 swivel and 2 rigid casters with non-marking 8" x 2" polyurethane wheels provide the best combination of reduced rolling resistance and quiet operation. Wheel brakes on swivel casters are standard. All-welded construction with heavy 12 gauge shelves, available with 1-1/2" lip of with flush edges. Shelf clearance 21" with lipped shelves, 22-1/2" with flush shelves. Top shelf height 35".

Shelf Size	Lip Edge Shelves	Flush Edge Shelves	Wt.
24 x 36	ERGL-2436-8PYBK	ERG-2436-8PYBK	112
24 x 48	ERGL-2448-8PYBK	ERG-2448-8PYBK	137
30 x 48	ERGL-3048-8PYBK	ERG-3048-8PYBK	155
30 x 60	ERGL-3060-8PYBK	ERG-3060-8PYBK	181

Floor Lock Option, add: **-FL**



**Model
ERGL-2448-8PYBK**



Model
5M-2448-6PH

Multi-Shelf Trucks

Storage Rack on Wheels

Heavy-duty trucks with three, four, or five shelves. All-welded 12 gauge steel shelves provide plenty of space to transport your large loads. Also used as portable storage racks that can be moved for cleaning, or to different locations as your storage requirements change. Two rigid and two swivel casters with 6" x 2" phenolic wheels. Comfortable formed 1" tubular steel push handle. Shelves available flush or with 1-1/2" retaining lip. 3600 lbs. capacity.

	W x L	LIP SHELVES 46-1/2" Overall Height	FLUSH SHELVES 45" Overall Height	Shelf Clearance	Wt.
3 Shelf	24 x 36	3ML-2436-6PH	3M-2436-6PH	16-1/2"	142
	24 x 48	3ML-2448-6PH	3M-2448-6PH	16-1/2"	173
	30 x 48	3ML-3048-6PH	3M-3048-6PH	16-1/2"	204
	30 x 60	3ML-3060-6PH	3M-3060-6PH	16-1/2"	244
	W x L	LIP SHELVES 65" Overall Height	FLUSH SHELVES 63-1/2" Overall Height	Shelf Clearance	Wt.
4 Shelf	24 x 36	4ML-2436-6PH	4M-2436-6PH	16-1/2"	175
	24 x 48	4ML-2448-6PH	4M-2448-6PH	16-1/2"	216
	30 x 48	4ML-3048-6PH	4M-3048-6PH	16-1/2"	256
	30 x 60	4ML-3060-6PH	4M-3060-6PH	16-1/2"	309
	W x L	LIP SHELVES 65" Overall Height	FLUSH SHELVES 63-1/2" Overall Height	Shelf Clearance	Wt.
5 Shelf	24 x 36	5ML-2436-6PH	5M-2436-6PH	12"	207
	24 x 48	5ML-2448-6PH	5M-2448-6PH	12"	258
	30 x 48	5ML-3048-6PH	5M-3048-6PH	12"	307
	30 x 60	5ML-3060-6PH	5M-3060-6PH	12"	373

For 6" x 2" Polyurethane Casters, use wheel code **-6PY** (3600 lbs. Capacity)

For 6" x 2" Mold-on Rubber Casters, use wheel code **-6MR** (2000 lbs. Capacity)

Multi-Shelf Order Picking Truck

3600 lbs. Capacity

Larger capacity to pick more orders means fewer trips. All-welded 12 gauge shelves available with retaining lip or flush edges. 12" long writing shelf is 21" wide on 24" wide trucks and 27" wide on 30" wide trucks. Sloped storage pocket measures 14" wide x 12-1/2" long with 4-3/4" access height. 6" x 2" phenolic casters.



Model
4ML2448-6PH-WSP

	W x L	LIP SHELVES 46-1/2" Overall Height	FLUSH SHELVES 45" Overall Height	Shelf Clearance	Wt.
3 Shelf	24 x 36	3ML2436-6PH-WSP	3M-2436-6PH-WSP	16-1/2"	142
	24 x 48	3ML2448-6PH-WSP	3M-2448-6PH-WSP	16-1/2"	173
	30 x 48	3ML3048-6PH-WSP	3M-3048-6PH-WSP	16-1/2"	204
	30 x 60	3ML3060-6PH-WSP	3M-3060-6PH-WSP	16-1/2"	244
	W x L	LIP SHELVES 65" Overall Height	FLUSH SHELVES 63-1/2" Overall Height	Shelf Clearance	Wt.
4 Shelf	24 x 36	4ML2436-6PH-WSP	4M-2436-6PH-WSP	16-1/2"	175
	24 x 48	4ML2448-6PH-WSP	4M-2448-6PH-WSP	16-1/2"	216
	30 x 48	4ML3048-6PH-WSP	4M-3048-6PH-WSP	16-1/2"	256
	30 x 60	4ML3060-6PH-WSP	4M-3060-6PH-WSP	16-1/2"	309
	W x L	LIP SHELVES 65" Overall Height	FLUSH SHELVES 63-1/2" Overall Height	Shelf Clearance	Wt.
5 Shelf	24 x 36	5ML2436-6PH-WSP	5M-2436-6PH-WSP	12"	207
	24 x 48	5ML2448-6PH-WSP	5M-2448-6PH-WSP	12"	258
	30 x 48	5ML3048-6PH-WSP	5M-3048-6PH-WSP	12"	307
	30 x 60	5ML3060-6PH-WSP	5M-3060-6PH-WSP	12"	373

For 6" x 2" Polyurethane Casters, use wheel code: **-6PY** (3600 lbs. Capacity)

For 6" x 2" Mold-on Rubber Casters, use wheel code: **-6MR** (2000 lbs. Capacity)



Order Picking Truck

1200 lbs. Capacity

Convenient 12" long writing shelf for paperwork adds to the versatility of this truck. Bottom shelf has a 1-1/2" retaining lip, and the top shelf is available with a lip, or flush. The 2 swivel and 2 rigid casters feature non-marking 5" diameter polyurethane wheels with ball bearings. Swivel casters have wheel brakes. Top shelf height 35", writing shelf height 39".

Shelf Size	LIP EDGE SHELVES	FLUSH EDGE TOP	Wt.
18 x 32	LGL-1832-WSBRK	LG-1832-WSBRK	80
24 x 36	LGL-2436-WSBRK	LG-2436-WSBRK	101
24 x 48	LGL-2448-WSBRK	LG-2448-WSBRK	120



Model
LGL-2436-WSBRK

Order Picking Truck with Storage Pocket

Sloped storage pocket under writing shelf, measures 14" wide x 12-1/2" long x 4-3/4" access height.

Shelf Size	LIP EDGE SHELVES	FLUSH EDGE TOP	Wt.
18 x 32	LGL-1832-WS-P-BK	LG-1832-WS-P-BK	90
24 x 36	LGL-2436-WS-P-BK	LG-2436-WS-P-BK	111
24 x 48	LGL-2448-WS-P-BK	LG-2448-WS-P-BK	130



Storage Pocket

Order Picking Truck with Storage Drawer

Accessory drawer with cylinder lock and 2 keys measures 13" wide x 17" deep x 4-1/2" high, offers secure storage.

Shelf Size	LIP EDGE SHELVES	FLUSH EDGE TOP	Wt.
24 x 36	LGL-2436-WSBKDR	LG-2436-WSBKDR	116
24 x 48	LGL-2448-WSBKDR	LG-2448-WSBKDR	145



Storage Drawer

3-Shelf Order Picking Truck

1200 lbs. Capacity

Convenience and versatility of our standard order-picking truck, with the added storage of a 3rd shelf. Bottom shelf has a 1-1/2" retaining lip, and the top 2 shelves are available with a lip or flush. The 2 swivel and 2 rigid casters feature non-marking 5" diameter polyurethane wheels with ball-bearings. Swivel casters have wheel brakes. Top shelf height 35". Writing shelf height 39". Clearance between shelves is 12". Also available with storage pocket measuring 14" wide x 12-1/2" long.

Shelf Size	LIP EDGE SHELVES	FLUSH TOP (& CENTER)	Wt.
18 x 32	3LGL-1832-WSBRK	3LG-1832-WSBRK	97
24 x 36	3LGL-2436-WSBRK	3LG-2436-WSBRK	133
24 x 48	3LGL-2448-WSBRK	3LG-2448-WSBRK	162
WITH STORAGE POCKET			
18 x 32	3LGL1832-WSP-BK	3LG-1832-WSP-BK	106
24 x 36	3LGL2436-WSP-BK	3LG-2436-WSP-BK	142
24 x 48	3LGL2448-WSP-BK	3LG-2448-WSP-BK	171



Model
3LGL-2448-WSP-BK



Model
DS1830X3-5PY

3-Inch Deep Shelf Trucks

These trucks combine the convenience of 3" deep trays for accumulating and transporting smaller parts with the rugged durability of an all-welded unit. Shelves are formed from 12 gauge steel, with 3" high sides. 2 swivel and 2 rigid non-marking polyurethane casters for easy maneuverability and quiet operation. Clearance between shelves is 22-1/2".

1200 lbs. Capacity; 5" Polyurethane casters, 35" overall height

3600 lbs. Capacity; 6" Polyurethane casters, 36-1/2" overall height

Shelf Size	1200 LBS. CAPACITY		3600 LBS. CAPACITY	
	Model No.	Wt.	Model No.	Wt.
18 x 30	DS1830X3-5PY	71	DS1830X3-6PY	81
24 x 36	DS2436X3-5PY	95	DS2436X3-6PY	105
24 x 48	DS2448X3-5PY	122	DS2448X3-6PY	132
30 x 60	—		DS3060X3-6PY	181



Model
DS2436X6-6PY

6-Inch Deep Shelf Trucks

The extra carrying capacity of the 6" high shelf lips, combined with the heavy 12 gauge welded construction make these trucks ideal for heavier applications. Shelves are formed from a single sheet of steel and welded in place, resulting in an extremely rigid, durable unit. Polyurethane casters roll quietly and more easily under heavier load conditions. Clearance between shelves is 16-1/2".

1200 lbs. Capacity; 5" Polyurethane casters, 35" overall height

3600 lbs. Capacity; 6" Polyurethane casters, 36-1/2" overall height

Shelf Size	1200 LBS. CAPACITY		3600 LBS. CAPACITY	
	Model No.	Wt.	Model No.	Wt.
18 x 30	DS1830X6-5PY	87	DS1830X6-6PY	97
24 x 36	DS2436X6-5PY	116	DS2436X6-6PY	126
24 x 48	—		DS2448X6-6PY	157



Model
DS2436X12-6PY

12-Inch Deep Shelf Truck

Shelves are all-welded 12 gauge. Top shelf has 12" lip for maximum capacity, bottom shelf has 1-1/2" lip. Non-marking polyurethane casters are quiet rolling and move easier under heavier load conditions. Shelf clearance is 15".

1200 lbs. Capacity; 5" Polyurethane casters, 35" overall height

3600 lbs. Capacity; 6" Polyurethane casters, 36-1/2" overall height

Shelf Size	1200 LBS. CAPACITY		3600 LBS. CAPACITY	
	Model No.	Wt.	Model No.	Wt.
18 x 30	DS1830X12-5PY	91	DS1830X12-6PY	101
24 x 36	DS2436X12-5PY	122	DS2436X12-6PY	132
24 x 48	—		DS2448X12-6PY	165



Cushion Load Deep Shelf Trucks

1200 lbs. Capacity

Large, cushion-load wheels roll over rough and uneven surfaces, and deep top trays help to retain the load. All-welded construction with 12 gauge shelves ships fully assembled and ready for immediate use. Durable powder coated finish. 9" Pneumatic casters, 36" overall height, 10" Puncture-proof solid rubber casters, 36-1/2" overall height.

3-Inch Deep Top Shelf

Bottom shelf 1-1/2" deep, 20" shelf clearance.

Shelf Size W x L	9" x 3" Pneumatic Casters		10" x 2.75" Solid Rubber Puncture-Proof Casters	
	Model No.	Wt.	Model No.	Wt.
24 x 36	DS-2436X3-9P	101	DS-2436X3-10SR	106
24 x 48	DS-2448X3-9P	127	DS-2448X3-10SR	132
30 x 60	DS-3060X3-9P	171	DS-3060X3-10SR	176

6-Inch Deep Top Shelf

Bottom shelf 1-1/2" deep, 17" shelf clearance.

Shelf Size W x L	9" x 3" Pneumatic Casters		10" x 2.75" Solid Rubber Puncture-Proof Casters	
	Model No.	Wt.	Model No.	Wt.
24 x 36	DS-2436X6-9P	122	DS-2436X6-10SR	127
24 x 48	DS-2448X6-9P	136	DS-2448X6-10SR	141

12-Inch Deep Top Shelf

Bottom shelf 1-1/2" deep, 11" shelf clearance.

Shelf Size W x L	9" x 3" Pneumatic Casters		10" x 2.75" Solid Rubber Puncture-Proof Casters	
	Model No.	Wt.	Model No.	Wt.
24 x 36	DS-2436X12-9P	135	DS-2436X12-10SR	140
24 x 48	DS-2448X12-9P	168	DS-2448X12-10SR	173



**Model
DS-2436X3-9P**



**Model
DS-2436X6-9P**



**Model
DS-2436X12-9P**

Deep Shelf Order Picking Truck

Sloped storage pocket under the 12" long Writing Shelf measures 14" wide x 12-1/2" long x 4-3/4" access height. Deep Tray Shelves help contain loads. Durable all-welded construction with 12 gauge shelves and a powder coated finish. Non-marking 6" x 2" polyurethane casters. 3600 lbs. capacity.

Shelf Size W x L	3" Deep Shelves 22-1/2" Shelf Clearance		6" Deep Shelves 16-1/2" Shelf Clearance	
	Model No.	Wt.	Model No.	Wt.
18 x 30	DS1830X3-6PYWSP	101	DS1830X6-6PYWSP	117
24 x 36	DS2436X3-6PYWSP	125	DS2436X6-6PYWSP	146
24 x 48	DS2448X3-6PYWSP	152	DS2448X6-6PYWSP	177

Shelf Size W x L	12" Deep Top Shelf 1-1/2" Deep Bottom Shelf 15" Shelf Clearance	
	Model No.	Wt.
18 x 30	DS1830X126PYWSP	121
24 x 36	DS2436X126PYWSP	152
24 x 48	DS2448X126PYWSP	185



**Model
DS2436X6-6PYWSP**



Model
TS-1832-5PY



Model
TU-2436-5PY



Model
TT-1830-5PY

Tray Trucks

800 lbs. Capacity

All-welded Tray Trucks ship set up and ready for immediate use. Heavy 12 gauge formed shelves are welded to 14 gauge tubular steel uprights with integral handles on both ends. Non-marking 5" x 1-1/4" polyurethane casters, 2 swivel and 2 rigid. Overall height is 36".

TS Trucks with 1-1/2" deep trays,
22" clearance between shelves

Shelf Size	Model No.	Wt.
18 x 24	TS-1824-5PY	54
18 x 32	TS-1832-5PY	66
24 x 36	TS-2436-5PY	85

TT Trucks with 3" deep trays,
19" clearance between shelves

Shelf Size	Model No.	Wt.
18 x 30	TT-1830-5PY	69
24 x 36	TT-2436-5PY	92

TU Trucks with 6" deep trays,
13" clearance between shelves

Shelf Size	Model No.	Wt.
18 x 30	TU-1830-5PY	97
24 x 36	TU-2436-5PY	126

OPTIONS: -S with 4 swivel casters



Model
TT-1830-5PY-DR

Tray Trucks with Drawer

800 lbs. Capacity

Available with large locking storage drawer that conveniently opens below the handle. Drawer measures 13"W x 17"L x 4-1/2"H.

TS Trucks with 1-1/2" deep trays

Shelf Size	Model No.	Wt.
18 x 24	TS-1824-5PY-DR	72
18 x 32	TS-1832-5PY-DR	84
24 x 36	TS-2436-5PY-DR	103

TT Trucks with 3" deep trays

Shelf Size	Model No.	Wt.
18 x 30	TT-1830-5PY-DR	87
24 x 36	TT-2436-5PY-DR	110

OPTIONS: -S with 4 swivel casters

Service Cart

800 lbs. Capacity

All-welded construction -14 gauge shelves with 1-1/2" corner angles create a solid and durable service cart. Tubular handle "bolts on". Available in a 2 or 3 shelf configuration. Top (and middle) shelf can be either flush or configured with a 1-1/2" retaining lip. Rides smoothly on 5" x 1-1/4" polyurethane wheels, with 2 rigid and 2 swivel bolted-on casters (hardware included). Uniquely sized to ship "small package" and save on freight cost. 29-1/4" top shelf height. 36" handle height.

	Shelf Size	FLUSH TOP (& CENTER)	LIP EDGE SHELVES	Wt.
2 SHELF 20" Shelf Clearance	18 x 32	LG-1832-UPS	LGL-1832-UPS	51
	24 x 36	LG-2436-UPS	LGL-2436-UPS	65
3 SHELF 9-1/4" Shelf Clearance	18 x 32	3LG-1832-UPS	3LGL-1832-UPS	67
	24 x 36	3LG-2436-UPS	3LGL-2436-UPS	88



**Model
LGL-2436-UPS**



**Model
LG-2436-UPS**



**Model
3LGL-2436-UPS**




**Model
3LGL-2436-UPS**

Mobile Table

800 lbs. Capacity

All-welded construction in a mobile table that ships "small package" and saves on freight costs. 14 gauge shelves with 1-1/2" corner angles create a solid and durable mobile table. Flush top table measures 29-1/4" from the floor. 5" x 1-1/4" non-marking polyurethane wheels, with 4 swivel bolted-on casters (hardware included) provide smooth rolling performance.

Size	Model No.	Wt.
18 x 32	IP-1832-UPS	48
24 x 36	IP-2436-UPS	62

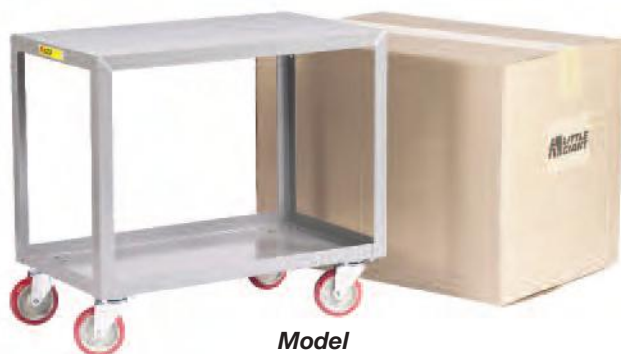

**Model
IP-2436-UPS**



Model
EA-2436-5PY

Easy-Access Shelf Truck

Welded service cart design with no corner upright posts allows easier access to contents on lower shelf. Heavy 12 gauge shelves provide 600 lbs. overall capacity. Two swivel, two rigid casters have non-marking polyurethane wheels with ball bearings for quiet, easy movement over most surfaces, including carpet. Overall height 35" with 26" clearance between shelves.

Shelf Size	Model No.	Wt.
18 x 24	EA-1824-5PY	56
18 x 32	EA-1832-5PY	63
24 x 36	EA-2436-5PY	85



Model
LGLP-2436-BK

Welded Service Cart with Perforated Deck

1200 lbs. Capacity

The 12 gauge steel shelves have smooth perforations that allow unwanted debris & moisture to pass through. All-welded service carts feature 1-1/2" retaining lip. Non marking 5" polyurethane casters wheel brakes. Overall height 35", shelf clearance 25". Powder coated gray finish.

Shelf Size W x L	Model No.	Wt.
24 x 36	LGLP-2436-BK	80
24 x 48	LGLP-2448-BK	97



Model
LK-2436-5PYBK



Model
LK2436-5PYBKAH

Low Deck Truck

1200 lbs. Capacity

Low top shelf minimizes bending. Available in either Fixed Height or Adjustable Height. Top shelf is available with a 1-1/2" lip or flush. Bottom shelf has 1-1/2" retaining lip. Rolls easily on 5" non-marking polyurethane casters, 2 swivel with wheel brakes and 2 rigid.

FIXED HEIGHT			
Top Deck 24" High, 14" Shelf Clearance			
Shelf Size	Lip Shelves	Flush Top	Wt.
18 x 24	LKL-1824-5PYBK	LK-1824-5PYBK	53
18 x 32	LKL-1832-5PYBK	LK-1832-5PYBK	62
24 x 36	LKL-2436-5PYBK	LK-2436-5PYBK	82
24 x 48	LKL-2448-5PYBK	LK-2448-5PYBK	101
30 x 48	LKL-3048-5PYBK	LK-3048-5PYBK	132
30 x 60	LKL-3060-5PYBK	LK-3060-5PYBK	161
ADJUSTABLE HEIGHT			
Top Deck 25" - 33" High, 15" - 23" Shelf Clearance			
Shelf Size	Lip Shelves	Flush Top	Wt.
18 x 32	LKL1832-5PYBKAH	LK1832-5PYBKAH	69
24 x 36	LKL2436-5PYBKAH	LK2436-5PYBKAH	89
24 x 48	LKL2448-5PYBKAH	LK2448-5PYBKAH	108
30 x 48	LKL3048-5PYBKAH	LK3048-5PYBKAH	139
30 x 60	LKL3060-5PYBKAH	LK3060-5PYBKAH	168

“Combo Cart” Combination Shelf and Platform Truck

1200 lbs. Capacity

This unique cart combines the storage capacity of multiple shelves with the utility of an open deck platform truck. All-welded construction with 12 gauge steel deck and shelves for optimum strength. Clearance between shelves is 12”, overall height is 36”. 2 swivel and 2 rigid 5” x 1-1/4” polyurethane casters with wheel brakes. Durable powder coated finish.

Platform Size W x L	Shelf Size W x L	Model No.	Wt.
24 x 48	24 x 22-1/2	CC-2448-5PYBK	84
30 x 60	30 x 26-1/2	CC-3060-5PYBK	157



**Model
CC-2448-5PYBK**

Platform Truck with Perforated Deck

Smooth 12 gauge perforated deck allows unwanted debris and moisture to pass through. Available with 1-1/2” lip, or flush edges. Removable pushbar handle with 2 swivel, 2 rigid casters. All-welded construction, ships fully assembled. Durable powder coated finish.

Deck W x L	Flush Edge	Lip Edge	Wt.
1200 lbs. Capacity, 5” x 1-1/4” Polyurethane casters			
24 x 36	T-710-P-1H-UPS	T-710-P-LU-UPS	44
24 x 48	T-720-P-1H-UPS	T-720-P-LU-UPS	50
1600 lbs. Capacity, 6” x 2” Mold-On Rubber Casters			
24 x 36	T-510-P-1H	T-510-P-LU	44
24 x 48	T-520-P-1H	T-520-P-LU	50



**Model
T-720-P-LU-UPS**



**Model
T-520-P-1H**

Hardwood Deck Platform Trucks

Capacities to 2400 lbs.

These premium wood platform trucks are built to last, with solid hardwood construction. Deck boards and cross battens are 5/4 hardwood, and feature chamfered edges. All hardware is plated and bolts countersunk to provide a smooth deck surface. Sturdy removable pipe handle is standard with 2 steel cross-braces to help retain big loads.

CASTER SELECTION						
Deck Size	6” x 2” MOLD-ON RUBBER 2000 lbs. Capacity		8” x 2” MOLD-ON RUBBER 2400 lbs. Capacity		8” x 2” POLYURETHANE NON-MARKING TREAD with Wheel Brakes 2400 lbs. Capacity	
	Model No.	Wt.	Model No.	Wt.	Model No.	Wt.
24 x 48	◆ W2448-6MR	103	◆ W2448-8MR	107	◆ W2448-8PUBK	98
30 x 48	◆ W3048-6MR	110	◆ W3048-8MR	114	◆ W3048-8PUBK	105
30 x 60	◆ W3060-6MR	130	◆ W3060-8MR	134	◆ W3060-8PUBK	125
36 x 72	◆ W3672-6MR	146	◆ W3672-8MR	150	◆ W3672-8PUBK	141



**Model
W2448-8PUBK**



Model
RNB2-2448-6MR

Work Height Platform Truck with Lower Shelf

2000 lbs. Capacity

12 gauge steel top deck is raised to a comfortable work height to minimize bending and lifting thus reducing back strain. Lower deck is 12 gauge with 1-1/2" retaining lip and provides secure storage when traveling. Fixed height models have a top deck height of 26". Adjustable height versions adjust from 25-1/2" to 35-1/2". Pushbar handle is located 14" above deck. 2 rigid, 2 swivel casters with long lasting 6" mold-on rubber wheels. All welded construction with durable gray powder coat.

Steel Deck

Smooth 12 gauge steel with powder coated finish.

Top Deck Size	Lower Deck Size	Fixed Height Model No.	Wt.	Adjustable Height Model No.	Wt.
24 x 48	24 x 36	RNB2-2448-6MR	140	RNB2-2448-6MRAH	150
24 x 60	24 x 48	RNB2-2460-6MR	163	RNB2-2460-6MRAH	172
30 x 48	30 x 36	RNB2-3048-6MR	163	RNB2-3048-6MRAH	172
30 x 60	30 x 48	RNB2-3060-6MR	187	RNB2-3060-6MRAH	197

For 6" Polyurethane Wheels, use wheel code: **-6PY**

Floor lock option available, add: **-FL**



Model
RNH2-2448-6MR

Hardboard over Steel Deck

1/4" Hardboard surface over 12 gauge steel.

Top Deck Size	Lower Deck Size	Fixed Height Model No.	Wt.	Adjustable Height Model No.	Wt.
24 x 48	24 x 36	RNH2-2448-6MR	148	RNH2-2448-6MRAH	158
24 x 60	24 x 48	RNH2-2460-6MR	173	RNH2-2460-6MRAH	182
30 x 48	30 x 36	RNH2-3048-6MR	173	RNH2-3048-6MRAH	182
30 x 60	30 x 48	RNH2-3060-6MR	200	RNH2-3060-6MRAH	210

For 6" Polyurethane Wheels, use wheel code: **-6PY**

Floor lock option available, add: **-FL**



Model
RNL2-2448-6MR

Lip Edge Deck

12 gauge powder coated steel with 1-1/2" lip edge.

Top Deck Size	Lower Deck Size	Fixed Height Model No.	Wt.	Adjustable Height Model No.	Wt.
24 x 48	24 x 36	RNL2-2448-6MR	140	RNL2-2448-6MRAH	150
24 x 60	24 x 48	RNL2-2460-6MR	163	RNL2-2460-6MRAH	172
30 x 48	30 x 36	RNL2-3048-6MR	163	RNL2-3048-6MRAH	172
30 x 60	30 x 48	RNL2-3060-6MR	187	RNL2-3060-6MRAH	197

For 6" Polyurethane Wheels, use wheel code: **-6PY**

Floor lock option available, add: **-FL**



Work-Height Platform Truck with Open Base

2000 lbs. Capacity

Comfortable 12 gauge raised deck reduces bending and back strain. Removable pushbar handle extends 14" above the deck. Open base reduces weight and prevents accumulation of unnecessary materials. All-welded steel construction with durable powder coated finish ships fully assembled. 6" x 2" mold-on rubber casters, 2 swivel, 2 rigid.

Steel Deck

Smooth 12 gauge steel with powder coated finish.

	Fixed Deck Height 26"		Adjustable Height 24"-34"	
Deck Size	Model No.	Wt.	Model No.	Wt.
24 x 48	RNB-2448-6MR	116	RNB-2448-6MR-AH	123
24 x 60	RNB-2460-6MR	131	RNB-2460-6MR-AH	138
30 x 48	RNB-3048-6MR	131	RNB-3048-6MR-AH	138
30 x 60	RNB-3060-6MR	146	RNB-3060-6MR-AH	153

For 6" Polyurethane Wheels, use wheel code: **-6PY**

Floor lock option available, add: **-FL**

Hardboard over Steel Deck

1/4" Hardboard surface over 12 gauge steel.

	Fixed Deck Height 26"		Adjustable Height 24"-34"	
Deck Size	Model No.	Wt.	Model No.	Wt.
24 x 48	RNH-2448-6MR	123	RNH-2448-6MR-AH	130
24 x 60	RNH-2460-6MR	141	RNH-2460-6MR-AH	148
30 x 48	RNH-3048-6MR	141	RNH-3048-6MR-AH	148
30 x 60	RNH-3060-6MR	159	RNH-3060-6MR-AH	166

For 6" Polyurethane Wheels, use wheel code: **-6PY**

Floor lock option available, add: **-FL**

Lip Edge Deck

12 gauge powder coated steel with 1-1/2" lip edge.

	Fixed Deck Height 26"		Adjustable Height 24"-34"	
Deck Size	Model No.	Wt.	Model No.	Wt.
24 x 48	RNL-2448-6MR	116	RNL-2448-6MR-AH	123
24 x 60	RNL-2460-6MR	131	RNL-2460-6MR-AH	138
30 x 48	RNL-3048-6MR	131	RNL-3048-6MR-AH	138
30 x 60	RNL-3060-6MR	146	RNL-3060-6MR-AH	153

For 6" Polyurethane Wheels, use wheel code: **-6PY**

Floor lock option available, add: **-FL**



Floor Lock Option available on fixed height models, add **-FL**



**Model
RNB-2448-6MR**



**Model
RNH-2448-6MR-AH**



**Model
RNL-2448-6MR-AH**



**Model
T700-1H**



**Model
T700-LU**



**Model
T720-DIA-1H**



**Model
NBX3-2448-6PY**

Steel Deck Platform Trucks

1200 lbs. and 1600 lbs. Capacity

Fully assembled and ready for use, these all-welded steel platform trucks are built for long, trouble-free service in medium duty applications. Removable cross-brace handle extends 28" high above the reinforced formed steel deck.

	6" x 2" MOLD-ON RUBBER 1600 lbs. Capacity		5" POLYURETHANE 1200 lbs. Capacity	
Deck Size	Model No.	Wt.	Model No.	Wt.
18 x 32	T500-1H	61	T700-1H	39
24 x 36	T510-1H	71	T710-1H	48
24 x 48	T520-1H	80	T720-1H	56
24 x 60	T530-1H	88	T730-1H	63

Platform Trucks with Lip Edge

Formed steel deck has 1-1/2" lip to help retain small parts.

	6" x 2" MOLD-ON RUBBER 1600 lbs. Capacity		5" POLYURETHANE 1200 lbs. Capacity	
Deck Size	Model No.	Wt.	Model No.	Wt.
18 x 32	T500-LU	61	T700-LU	39
24 x 36	T510-LU	71	T710-LU	48
24 x 48	T520-LU	80	T720-LU	56
24 x 60	T530-LU	88	T730-LU	63

Quick-Turn Platform Trucks

Diamond caster pattern with center-mounted rigid casters allows for tighter turning radius and added maneuverability. Welded steel deck with removable handle.

	6" x 2" MOLD-ON RUBBER 1600 lbs. Capacity		5" POLYURETHANE 1000 lbs. Capacity	
Deck Size	Model No.	Wt.	Model No.	Wt.
24 x 36	T510-DIA-1H	71	T710-DIA-1H	48
24 x 48	T520-DIA-1H	80	T720-DIA-1H	56
24 x 60	T530-DIA-1H	88	T730-DIA-1H	63

3-inch Lip Edge Platform Truck

The formed steel 12 gauge deck has 3" high lips for better load retention. All-welded construction (except casters), and ready for immediate use. Removable pushbar handle with 2 swivel and 2 rigid casters. Durable powder coated finish.

CASTER SELECTION				
	6" x 2" MOLD-ON RUBBER 2000 lbs. Capacity		6" x 2" POLYURETHANE 3600 lbs. Capacity	
Deck Size	Model No.	Wt.	Model No.	Wt.
24 x 36	NBX3-2436-6MR	91	NBX3-2436-6PY	83
24 x 48	NBX3-2448-6MR	103	NBX3-2448-6PY	95
30 x 60	NBX3-3060-6MR	135	NBX3-3060-6PY	127

Heavy-Duty Platform Trucks

Capacities to 3600 lbs.

Sturdy all-welded unit is constructed of a formed 12 gauge steel deck with extra reinforcement on underside. Removable pipe handle is 1-5/16" OD and has two cross braces. Two swivel and two rigid casters with choice of wheels. Durable powder coated finish. Ships fully assembled and ready for use.



Floor Lock Option



Rolling Corner Bumper



Model
NBB-2448-8PYBK

CASTER SELECTION								
Deck Size	6" x 2" MOLD-ON RUBBER 2000 lbs. Capacity		8" x 2" MOLD-ON RUBBER 2400 lbs. Capacity		8" x 2" POLYURETHANE NON-MARKING TREAD with Wheel Brakes* 3600 lbs. Capacity		8" x 2" POLYURETHANE with Wheel Brakes* & Rolling Corner Bumpers 3600 lbs. Capacity	
	Model No.	Wt.	Model No.	Wt.	Model No.	Wt.	Model No.	Wt.
24 x 36	◆ NBB-2436-6MR	84	◆ NBB-2436-8MR	88	◆ NBB-2436-8PYBK	79	NCB-2436-8PYBK	80
24 x 48	◆ NBB-2448-6MR	95	◆ NBB-2448-8MR	99	◆ NBB-2448-8PYBK	90	NCB-2448-8PYBK	91
24 x 60	NBB-2460-6MR	115	NBB-2460-8MR	119	NBB-2460-8PYBK	110	NCB-2460-8PYBK	111
30 x 48	◆ NBB-3048-6MR	115	◆ NBB-3048-8MR	119	◆ NBB-3048-8PYBK	110	NCB-3048-8PYBK	111
30 x 60	◆ NBB-3060-6MR	127	◆ NBB-3060-8MR	131	◆ NBB-3060-8PYBK	125	NCB-3060-8PYBK	126
30 x 72	NBB-3072-6MR	140	NBB-3072-8MR	144	NBB-3072-8PYBK	135	NCB-3072-8PYBK	136
36 x 60	NBB-3660-6MR	141	NBB-3660-8MR	145	NBB-3660-8PYBK	136	NCB-3660-8PYBK	137
36 x 72	◆ NBB-3672-6MR	157	◆ NBB-3672-8MR	161	◆ NBB-3672-8PYBK	152	NCB-3672-8PYBK	153
48 x 72	NBB-4872-6MR	192	NBB-4872-8MR	196	NBB-4872-8PYBK	187	NCB-4872-8PYBK	188

OPTIONS: Floor Lock **-FL**, Wheel Brakes **-BK**
Extra handles, fixed handle, pipe stakes, and other
superstructures also available.

* Note: Wheel brakes are not intended to stop moving equipment, or for use on ramps or inclines.

Heavy-Duty Platform Trucks


Capacities to 5000 lbs.

Trucks are formed into a solid unit with a 12 gauge steel deck welded to a structural steel frame. Sturdy removable pipe handle extends 29" above deck. Axle mounted load wheels are 12" x 2-1/2", swivel caster wheels are 8" x 2". Deck height 14".

CASTER SELECTION						
Deck Size	RUBBER TIRED WHEELS 3000 lbs. Capacity		POLYURETHANE WHEELS 4000 lbs. Capacity		PHENOLIC WHEELS 5000 lbs. Capacity	
	Model No.	Wt.	Model No.	Wt.	Model No.	Wt.
24 x 48	R-2448-S	171	DT-2448-S	188	NBH-2448-PH	163
30 x 48	R-3048-S	180	DT-3048-S	197	NBH-3048-PH	172
30 x 60	R-3060-S	191	DT-3060-S	208	NBH-3060-PH	188
30 x 72	R-3072-S	200	DT-3072-S	218	NBH-3072-PH	192
36 x 60	R-3660-S	202	DT-3660-S	219	NBH-3660-PH	194
36 x 72	R-3672-S	215	DT-3672-S	232	NBH-3672-PH	207



Model
DT-2448-S

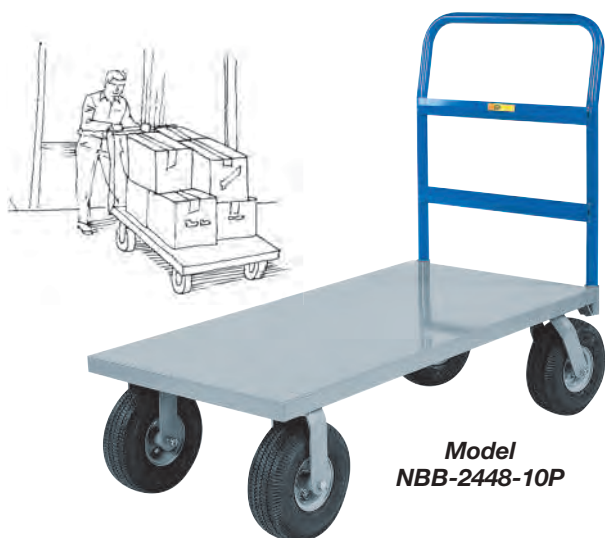

**Model
NBB-2448-10P**

Cushion-Load Platform Trucks With Pneumatic Tires

Ideal for use over rough and uneven floor surfaces. 4-ply full pneumatic wheels absorb shock and reduce vibration. Inflation pressure of tires can be adjusted to provide desired level of cushion. Removable crossbar handle and 2 rigid, 2 swivel casters.

	9" x 3" PNEUMATIC 1200 lbs. Capacity		10" x 3.50" PNEUMATIC 1500 lbs. Capacity	
Deck Size	Model No.	Wt.	Model No.	Wt.
24 x 36	◆ NBB-2436-9P	90	◆ NBB-2436-10P	98
24 x 48	◆ NBB-2448-9P	104	◆ NBB-2448-10P	112
24 x 60	NBB-2460-9P	113	NBB-2460-10P	121
30 x 48	◆ NBB-3048-9P	113	◆ NBB-3048-10P	121
30 x 60	◆ NBB-3060-9P	131	◆ NBB-3060-10P	139
30 x 72	NBB-3072-9P	145	NBB-3072-10P	150
36 x 72	◆ NBB-3672-9P	150	◆ NBB-3672-10P	159

For Floor Lock, add: -FL

Cushion-Load Platform Trucks With Puncture-Proof Tires

These trucks feature soft, solid rubber tires that can't go flat. Well suited for use over rough surfaces, yet easier to move under heavier loads than pneumatic tired trucks. They also require less maintenance than pneumatic tires. Removable crossbar handle and 2 rigid, 2 swivel casters.



**Model
NBB-2448-10SR**

	10" x 2.75" RUBBER 1500 lbs. Capacity	
Deck Size	Model No.	Wt.
24 x 36	◆ NBB-2436-10SR	104
24 x 48	◆ NBB-2448-10SR	118
24 x 60	NBB-2460-10SR	127
30 x 48	◆ NBB-3048-10SR	127
30 x 60	◆ NBB-3060-10SR	145
30 x 72	NBB-3072-10SR	157
36 x 72	◆ NBB-3672-10SR	165

For Floor Lock, add: -FL

High-Deck Cushion Load Platform Trucks

Built for heavier service and larger loads, these pneumatic tired steel platform trucks feature axle mounted load wheels with 1" roller bearings, and heavy service swivel caster brackets. Larger wheels increase mobility over the roughest terrain. High platform minimizes bending when loading.



**Model
BB3060B**

	1750 lbs. CAPACITY		2500 lbs. CAPACITY	
	Deck Height 19" Load Wheels 12" dia. Caster Wheels 10" dia.		Deck Height 21" Load Wheels 16" dia. Caster Wheels 12" dia.	
Deck Size	Model No.	Wt.	Model No.	Wt.
24 x 48	B2448B	155	BB2448B	160
30 x 48	B3048B	170	BB3048B	180
30 x 60	B3060B	185	BB3060B	200
36 x 60	B3660B	200	BB3660B	210
36 x 72	B3672B	210	BB3672B	230



High-End Platform Truck

With Non-Marking Polyurethane Wheels

2000 lbs. Capacity

Narrow 16-inch wide steel deck is ideal for busy aisles, or 24-inch for more loading capacity. Six wheel design is fully maneuverable with two 8" x 2" rigid center wheels with roller bearings, and four 5-inch corner mounted swivel casters with ball bearing wheels. All wheels are non-marking polyurethane tread for added maneuverability. Two removable pipe handles extend 48" above the deck for taller loads, which means fewer trips.

Deck Size	Model No.	Wt.
16 x 48	HE-1648	105
16 x 60	HE-1660	115
16 x 72	HE-1672	124
24 x 48	HE-2448	124
24 x 60	HE-2460	188



**Model
HE-1648**

6-Wheel Platform Trucks

Reinforced 12 gauge steel deck has center mounted rigid casters for a tighter turning radius. Swivel casters under all 4 corners provide greater load support and stability. Removable pipe handle with cross braces extends 29" high above the deck.

CASTER SELECTION				
	6" x 2" MOLD-ON RUBBER 2000 lbs. Capacity		6" x 2" POLYURETHANE 3600 lbs. Capacity	
Deck Size	Model No.	Wt.	Model No.	Wt.
24 x 48	NB6W-2448-6MR	129	NB6W-2448-6PY	114
24 x 60	NB6W-2460-6MR	139	NB6W-2460-6PY	124
30 x 48	NB6W-3048-6MR	145	NB6W-3048-6PY	130
30 x 60	NB6W-3060-6MR	164	NB6W-3060-6PY	149
30 x 72	NB6W-3072-6MR	182	NB6W-3072-6PY	167
36 x 60	NB6W-3660-6MR	177	NB6W-3660-6PY	162
36 x 72	NB6W-3672-6MR	197	NB6W-3672-6PY	182



**Model
NB6W-2448-6PY**

Nesting/Hinged Deck Platform Truck

2000 lbs. Capacity

Conserve floor space! These sturdy all-welded platform trucks are designed to nest into one-another when unloaded requiring only 14" of additional floor space per truck. Deck is 12 gauge steel with reinforcement. Removeable pipe handle is 1-5/16" OD with two cross-braces. Two swivel and two rigid casters with 6" mold-on rubber wheels for a soft ride. Powder coated for durability. Ships fully assembled and ready to use.

Deck Size	Lip Shelves	Wt.
30 x 60	NBN-3060-6MR	150



**Model
NBN-3060-6MR**



Model
DR-3048-6PY

Double End Rack Platform Truck

Welded steel construction with 2 removable Lattice-Style End Racks. End Racks extend 36" above the deck. Ideal for bulky packages and roll goods. 12 gauge reinforced steel deck - 9" deck height. Rolls quietly on 2 swivel and 2 rigid casters with non-marking 6" x 2" polyurethane wheels. Sturdy 3600 lbs. capacity.

Deck Size	Model No.	Wt.
24 x 48	DR-2448-6PY	108
24 x 60	DR-2460-6PY	121
24 x 72	DR-2472-6PY	119
30 x 48	DR-3048-6PY	123
30 x 60	DR-3060-6PY	138
30 x 72	DR-3072-6PY	153



Optional Floor Lock -FL



Model
DRB-3048-6PY

Double End Rack Platform Truck with Side Rack

3600 lbs. Capacity

Heavy-duty platform truck enclosed on three sides with removable side and end racks for the ultimate in configurable load carrying. 12 gauge powder coated steel deck measures 9" from the floor. The two removable end racks measure 36" high from the deck surface. The side rack extends 24" from the deck. Rolls smoothly on 2 swivel and 2 rigid casters with 6" x 2" non-marking polyurethane wheels.

Deck Size	Model No.	Wt.
24 x 48	DRB-2448-6PY	126
24 x 60	DRB-2460-6PY	142
30 x 48	DRB-3048-6PY	142
30 x 60	DRB-3060-6PY	159



Model
NBB-2448-8PY-2H

Double Handle Platform Truck

3600 lbs. Capacity

Handles at both ends for load retention and versatility. Sturdy all-welded unit is constructed of a formed 12 gauge steel deck with extra reinforcement on the underside. Two removable pipe handles are 1-5/16" O.D. and have two cross-braces. Two swivel and two rigid casters with choice of wheels. Durable powder coated finish. Ships fully assembled and ready for use.

CASTER SELECTION				
Deck Size	Model No.	Wt.	8" x 2" POLYURETHANE 3600 lbs. Capacity	
			Model No.	Wt.
24 x 36	NBB-2436-6MR-2H	98	NBB-2436-8PY-2H	93
24 x 48	NBB-2448-6MR-2H	109	NBB-2448-8PY-2H	104
24 x 60	NBB-2460-6MR-2H	129	NBB-2460-8PY-2H	124
30 x 48	NBB-3048-6MR-2H	130	NBB-3048-8PY-2H	125
30 x 60	NBB-3060-6MR-2H	142	NBB-3060-8PY-2H	140
30 x 72	NBB-3072-6MR-2H	155	NBB-3072-8PY-2H	150
36 x 60	NBB-3660-6MR-2H	157	NBB-3660-8PY-2H	152
36 x 72	NBB-3672-6MR-2H	173	NBB-3672-8PY-2H	168



Caster Steer Trailers

2000 lbs. Capacity

This versatile unit can be used as an independent platform truck for manual order picking and then quickly connected into a train of trailers. The caster steer design means wheels stay under the load at all times, providing better stability with unevenly distributed loads. The two swivel casters rotate 360°, providing excellent maneuverability even in tight areas.

- Reinforced 12 gauge steel deck is 11-1/2" high
- 8" x 2" mold-on rubber wheels with cast iron centers and roller bearings
- Removable pipe rack/pushbar handle extends 29" above the deck
- Ring drawbar stays in upright position for manual operation as a platform truck
- Pin and clevis coupler at rear



Model
CS-3060-8MRHD

Deck Size	Model No.	Wt.
30 x 60	CS-3060-8MRHD	160
30 x 72	CS-3072-8MRHD	175
36 x 60	CS-3660-8MRHD	178
36 x 72	CS-3672-8MRHD	195



Wishbone half of coupler stands upright when not in use.



PIN & CLEVIS REAR COUPLER



Versatile ring type wishbone coupler with 2-1/2" I.D. Ring can also be used with most pintle hitches.

Three Shelf Caster Steer Trailer

2000 lbs. Capacity

Our caster steel trailer now with 3 shelves for additional storage. 12 gauge shelves with 1-1/2" retaining lip to contain your loads while being transported. Clearance between shelves is 12". Top shelf height is 40". Caster steer design keeps the wheels under the loads. 2 rigid, 2 swivel heavy duty casters and 8" mold on rubber. Wishbone coupler with 2-1/2" I.D. ring on swivel end remains upright when not in use. Pin & clevis on rigid end.

Deck Size	Model No.	Wt.
30 x 60	3CSL-3060-8MRHD	314
30 x 72	3CSL-3072-8MRHD	355
36 x 60	3CSL-3660-8MRHD	357
36 x 72	3CSL-3672-8MRHD	402



Model
3CSL-2448-8MRHD



*Model
CT-3660-16P*



*Ring Drawbar Hitches
to Pin and Clevis.*

DOUBLE 5TH WHEEL STEER Tracking Trailer


2000 lbs. Capacity

The pivoting axles of these trailers are connected by a tie rod which turns the front and rear wheels in opposite directions. This design provides agile maneuvering of individual or multiple trailers in narrow aisles and around tight corners. A rear hitch on the four wheel steering trailer allows multiple trailers to track in the path of the lead trailer.

- 12 gauge steel deck with boxed edges has reinforced understructure.
- 16" pneumatic wheels with 1" roller bearings.
- 2-1/2" ID Ring Drawbar with Pin and Clevis Rear Hitch

Overall W x L x H	Model No.	Wt.
36 x 60 x 19	CT-3660-16P	251

- Not intended for speeds above 5 mph.
- Increased trailer loading or trailer quantity decreases braking capability of tow vehicle

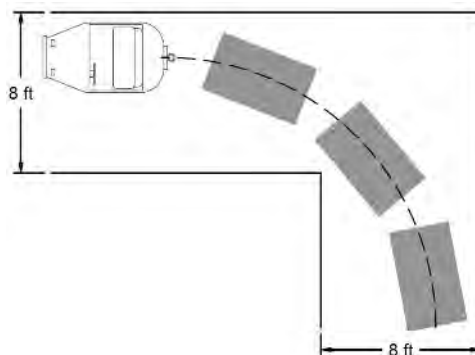

*Minimum
Aisle Width
8 feet
(up to 3 trailers).*

Custom Designs

Available with special End or Side Racks, Dividers, Shelves, and other custom superstructures to meet your requirements.





8-Wheeler Wagon Truck

3000 lbs. Capacity

8 wheels distribute the load over greater surface area. 16" x 4" pneumatic wheels are 4 ply with roller bearings and 1 inch axles. 12 gauge steel deck is available with flush edges or a 1-1/2" retaining lip. Ring Drawbar/T-Handle has 2-1/2" I.D. ring allows for intermittent low speed towing.

Size	Lip Edge Model No.	Flush Deck Model No.	Wt.
30 x 48	CD-3048-16P-CR	CD-3048-16PFD-CR	155
30 x 60	CD-3060-16P-CR	CD-3060-16PFD-CR	170
36 x 60	CD-3660-16P-CR	CD-3660-16PFD-CR	187
36 x 72	CD-3672-16P-CR	CD-3672-16PFD-CR	202



**Model
CD-3060-16PFD-CR**

2-Wheel Towable Wagon

1300 lbs. Capacity

Industrial-duty 12 gauge MIG welded Cargo bed has 10 cubic feet of storage space and is reinforced with square tubing. Rear liftgate is secured with spring-loaded latch pins and drops down for easy unloading. Wagon deck is 10-3/8" above ground. Heavy-duty cushion load 16" pneumatic wheels with roller bearings - easily handles heavy loads up to 1300 lbs. over rough terrain. Pin and clevis style tow-bar hitch. Not intended for speeds above 5 mph. Durable powder coated finish.

Bed Size	Model No.	Wt.
27 x 50	CH2W-2750-16P	207



**Model
CH2W-2750-16P**

Caster Steer Wagon

2000 lbs. Capacity

Built with a "T"-style pull handle for ergonomics and maneuverability. All-welded unit is constructed of a formed 12 gauge steel deck with 1-1/2" lip and extra reinforcement on the underside. Two swivel and two rigid casters with 8" x 2" mold-on rubber wheels. Handle pivots up and down and has vinyl hand grips. Durable powder coated finish.

Bed Size	Model No.	Wt.
24 x 48	CSW-2448-8MR	80
30 x 48	CSW-3048-8MR	91
30 x 60	CSW-3060-8MR	111
30 x 72	CSW-3072-8MR	122
36 x 60	CSW-3660-8MR	135
36 x 72	CSW-3672-8MR	136



**Model
CSW-3060-8MR**

RING DRAWBAR OPTION

Optional 36" long combination Ring Drawbar/ T-Handle includes 2-1/2" I.D. Eye for intermittent towing at speeds under 5 mph. Capacities reduced by 25% when towing.

Model 004-0184



Model
CH-3060-16P

HEAVY-DUTY Wagon Trucks

3500 lbs. Capacity

Fifth wheel steering describes a type of steering where the front wheels and axle assembly pivot on a center point, which is referred to as the fifth wheel. Because the steering wheels encounter less friction when turning than would be encountered in a swivel caster, wagon trucks with fifth wheel steering can be easier to maneuver under heavier load conditions. This is especially true when softer, wider pneumatic wheels are required because of use on rough or uneven surfaces. Wagon Trucks with this type of steering are typically pulled, but can also be pushed. T-handle with vinyl handgrips allows two man operation.

- Heavy 12 gauge reinforced steel decks with 1-1/2" retaining lip, or flush edge.
- Full 1-inch diameter axles and roller bearing wheels.
- Structural channel undercarriage for heavier loads and durability.

* Pan Steel Decks are standard with a 1-1/2" retaining lip. For Flush Steel Deck, add: **-FSD** to model number.



Flush Deck with Mold-On Rubber Wheels

WHEEL SELECTION

	12" x 2-1/2" Mold-On Rubber 3500 lbs. Capacity Deck Height: 16-1/2"		16" x 4" Pneumatic 3000 lbs. Capacity Deck Height: 18-1/2"		12" x 3-1/2" Pneumatic 2000 lbs. Capacity Deck Height: 16-1/2"	
Size	Model No.*	Wt.	Model No.*	Wt.	Model No.*	Wt.
24 x 48	CH-2448-12MR	185	CH-2448-16P	133	CH-2448-12P	123
30 x 48	CH-3048-12MR	201	CH-3048-16P	149	CH-3048-12P	140
30 x 60	CH-3060-12MR	216	CH-3060-16P	165	CH-3060-12P	155
30 x 72	CH-3072-12MR	220	CH-3072-16P	177	CH-3072-12P	167
36 x 60	CH-3660-12MR	224	CH-3660-16P	182	CH-3660-12P	172
36 x 72	CH-3672-12MR	251	CH-3672-16P	198	CH-3672-12P	187

For Flush Steel Deck, add: **-FSD** to model number



Model
CH-2448-X6-16P

HEAVY-DUTY Deep Lip Wagon Trucks

Additional carrying capacity is provided by the higher lip edge on these heavy-duty 12 gauge steel decks. Available in either a 3" or 6" deep deck, these units are perfect for transporting smaller parts and components.

WHEEL SELECTION

	12" x 2-1/2" Mold-On Rubber 3500 lbs. Capacity		16" x 4" Pneumatic 3000 lbs. Capacity		12" x 3-1/2" Pneumatic 2000 lbs. Capacity	
Size	Model No.	Wt.	Model No.	Wt.	Model No.	Wt.
3" LIP EDGE DECK						
24 x 48	CH-2448-X3-12MR	189	CH-2448-X3-16P	137	CH-2448-X3-12P	127
30 x 60	CH-3060-X3-12MR	221	CH-3060-X3-16P	170	CH-3060-X3-12P	160
6" LIP EDGE DECK						
24 x 48	CH-2448-X6-12MR	205	CH-2448-X6-16P	153	CH-2448-X6-12P	143
30 x 60	CH-3060-X6-12MR	241	CH-3060-X6-16P	190	CH-3060-X6-12P	180



Wagon Trucks

1200 lbs. Capacity

Fifth wheel steering combined with choice of puncture-proof solid rubber wheels, or cushion load pneumatic wheels make these trucks ideal for maneuvering over rough surfaces. Pull handle has vinyl hand grip. Deck size is 24" wide x 36" long. Available with a flush deck or with a 1-1/2" lip-up. All models ship via UPS. Durable powder coated red finish.

Steel Deck

Welded 12 gauge steel for maximum durability. Available with 1-1/2" retaining lip, or with flush edges for easier sliding on and off. Ships fully assembled, ready for immediate use.

Deck	Model No.	Capacity (lbs.)	Wheel Type	Wt.
Lip-Up	◆ LW-2436-8S	1200	8 x 2.50 Solid Rubber	70
	◆ LW-2436-10	1200	10 x 2.75 Solid Rubber	76
	◆ LW-2436-10P	1200	10 x 3.50 Pneumatic	67
Flush	LW-2436-8S-FSD	1200	8 x 2.50 Solid Rubber	70
	LW-2436-10-FSD	1200	10 x 2.75 Solid Rubber	76
	LW-2436-10P-FSD	1200	10 x 3.50 Pneumatic	67

Perforated Steel Deck

Smooth perforated 12 gauge steel deck with 1-1/2" lip allows dirt and moisture to pass through, but has no expanded metal ends to stick up and scratch or puncture load. Ships fully assembled, ready for immediate use.

W x L Deck	Model No.	Capacity (lbs.)	Wheel Type	Wt.
24 x 36	◆ LWP-2436-10	1200	10 x 2.50 Solid Rubber	73
	◆ LWP-2436-10P	1200	10 x 3.50 Pneumatic	63

Steel Deck Trucks with 6" Sides

Provides additional carrying capacity. Solid deck is formed with 6" high sides from a single sheet of 12 gauge steel and welded in place. Easy assembly of wheels and handle to welded unit.

W x L Deck	Model No.	Capacity (lbs.)	Wheel Type	Wt.
24 x 36	◆ LDW2436-X6-10	1200	10 x 2.75 Solid Rubber	92
	◆ LDW2436-X6-10P	1200	10 x 3.50 Pneumatic	83

Nursery Wagon - Perforated Deck

1200 lbs. Capacity

Smooth perforated 12 gauge steel deck with 1-1/2" lip allows debris and moisture to pass through. Deck is stronger and more durable than expanded metal, with no metal ends to stick up and scratch or puncture the load. Powder coated green finish. Ships fully assembled, ready for immediate use.

W x L Deck	Model No.	Capacity (lbs.)	Wheel Type	Wt.
24 x 36	LWP-2436-10-G	1200	10 x 2.75 Solid Rubber	73
	LWP-2436-10P-G	1200	10 x 3.50 Pneumatic	63

SHIPS
UPS


Model
LW-2436-10P

SHIPS
UPS


Model
LW-2436-10-FSD

SHIPS
UPS


Model
LWP-2436-10P

SHIPS
UPS


Model
LDW2436-X6-10

SHIPS
UPS


Model
LWP-2436-10P-G



Model
2LDWP2436-10P-G

2-Shelf Wagon Truck w/Perforated Deck

1000 lbs. Capacity

Rugged, all-welded steel construction. Shelves are smooth 12 gauge steel with round perforations - ideal for cleaning and drainage. 5th wheel style steering with ergonomic handle. Choose from 3 wheel types. Perfect for nursery or gardening. Ships fully assembled. Powder coated green finish.

W x L Deck	Model No.	Wheel Type	Wt.
24 x 36	2LDWP2436-8S-G	8" Solid Rubber Tire	95
	2LDWP2436-10-G	10" Solid Rubber Tire	101
	2LDWP2436-10P-G	10" Pneumatic	92
24 x 48	2LDWP2448-8S-G	8" Solid Rubber Tire	111
	2LDWP2448-10-G	10" Solid Rubber Tire	117
	2LDWP2448-10P-G	10" Pneumatic	108



Model
NP-2448-G

Raised Height Nursery Platform Truck

1000 lbs. Capacity

Perforated 14 gauge steel deck allows debris and moisture to pass through, but has no expanded metal ends to stick up and scratch or puncture load. Ergonomic deck height is 16" with a 1-1/2" lip-up. Two 12" load wheels and two 10" swivel caster wheels with pneumatic tires can easily transport heavy loads over rough or uneven surfaces. Removable handle that stands 20" above deck, and can be inserted into handle pockets on either end. Overall height 36". Powder coated green finish.

Deck Size	Model No.	Wt.
24 x 48	NP-2448-G	87



Model
T810P-9PN-G-LU

Nursery Platform Truck - Perforated Deck

1000 lbs. Capacity

Smooth perforated 12 gauge steel deck allows debris and moisture to pass through, but has no expanded metal ends to stick up and scratch or puncture load. Available with 1-1/2" lip or flush deck. Available with 9" cushion-load pneumatic wheels or 10" solid rubber. Removable handle stands 28" above deck. Overall height 39". Powder coated green finish.

9" x 3" PNEUMATIC WHEELS				
Deck Size	Lip Deck	Wt.	Flush Deck	Wt.
24 x 36	T810P-9PN-G-LU	59	T810P-9PN-G	59
24 x 48	T820P-9PN-G-LU	71	T820P-9PN-G	71
10" x 2.75" SOLID RUBBER WHEELS				
Deck Size	Lip Deck	Wt.	Flush Deck	Wt.
24 x 36	T810P-10SR-G-LU	67	T810P-10SR-G	67
24 x 48	T820P-10SR-G-LU	79	T820P-10SR-G	79

Two-Shelf Nursery Cart

1200 lbs. Capacity

All-welded construction is lightweight and durable. Smooth, industrial strength 12 gauge perforated steel shelves allow moisture & debris to pass through, clean up easily, and have a 1-1/2" retaining lip. Cushion load Pneumatic tires with 12" load wheels, 9" front swivel casters and extended loop handle for maneuverability Ships fully assembled with durable green powder coated finish. 36" overall height. Capacity 600 lbs. per shelf.

Deck Size	Model No.	Wt.
24 x 36	NP2-2436-G	100
24 x 48	NP2-2448-G	116



**Model
NP2-2448-G**

Service Cart - Perforated Deck

1000 lbs. Capacity

Perforated 12 gauge shelves allow debris and moisture to pass through, but has no expanded metal ends to stick up and scratch or puncture load. Shelves have 1-1/2" retaining lip. 2 swivel and 2 rigid casters with 9" pneumatic wheels for a cushioned ride. Flush handle mounted at swivel end. Shelf clearance is 19". Overall height is 35".

Deck Size	Model No.	Wt.
24 x 36	LGLP-2436-9P-G	80
24 x 48	LGLP-2448-9P-G	97



**Model
LGLP-2436-9P-G**

Multi-Shelf Nursery Truck

Up to 2000 lbs. Capacity (400 lbs. per shelf)

All-welded construction and powder coated finish - ideal for nursery applications! Heavy-duty 14 gauge steel shelves are perforated for easy cleaning/spraying down. Shelves have 1-1/2" lip all around for retaining objects. Comfortable formed 1" tubular steel push handle Rolls smoothly and quietly on 2 rigid and 2 swivel casters with 6 x 2 mold-on rubber wheels.


	Overall W x D x H	Model No.	Shelf Clearance	Wt.
3 Shelf	24 x 48 x 63	3MLP-2448-6MR-G	24-3/4"	141
	30 x 60 x 63	3MLP-3060-6MR-G	24-3/4"	188
4 Shelf	24 x 48 x 63	4MLP-2448-6MR-G	16"	170
	30 x 60 x 63	4MLP-3060-6MR-G	16"	232
5 Shelf	24 x 48 x 63	5MLP-2448-6MR-G	11-1/2"	194
	30 x 60 x 63	5MLP-3060-6MR-G	11-1/2"	270



**Model
4MLP-2448-6MR-G**



Model
APT-2448-6PY



Shown with Optional
Pushbar Handle



Shown with Optional
Pushbar Handle
(and without
supplied Uprights)



Shown with Optional
Lip Attachment

Adjustable Sheet & Panel Truck

Ideal for large or small quantities of plywood, drywall, or other sheet material. Includes two heavy-duty uprights that extend 27" above the deck and can be placed in any of four positions. Also great for rolled goods, office partition panels, folding tables or use as a standard platform truck. Two rigid and two swivel casters with choice of wheels provide plenty of carrying capacity.

Wheel type	Deck Size	Model No.	Capacity	Wt.
6" x 2" Non-marking Polyurethane Wheels	24 x 36	APT-2436-6PY	3600 lbs.	99
	24 x 48	APT-2448-6PY	3600 lbs.	117
	24 x 60	APT-2460-6PY	3600 lbs.	134
	24 x 72	APT-2472-6PY	3600 lbs.	156
	30 x 48	APT-3048-6PY	3600 lbs.	132
	30 x 60	APT-3060-6PY	3600 lbs.	150
	30 x 72	APT-3072-6PY	3600 lbs.	170
	36 x 60	APT-3660-6PY	3600 lbs.	165
	36 x 72	APT-3672-6PY	3600 lbs.	187

For 6" Phenolic Wheels, use wheel code: **-6PH** (3600 lbs. Capacity)
For 6" Mold-On Rubber, use wheel code: **-6MR** (2000 lbs. Capacity)
For Wheel Brakes on Swivel Casters, add: **-BK**

Additional Uprights for added storage and Optional Pushbar Handle

	Model No.	Size W x L	Wt.
Additional Uprights	004-0011	for 36" long decks	15
	004-0024	for 48" long decks	18
	004-0023	for 60" long decks	21
	004-0223	for 72" long decks	24
Pushbar Handles	003-0129	for 24" wide decks	13
	003-0131	for 30" wide decks	14
	003-0132	for 36" wide decks	15

LIP ATTACHMENT— Optional 1-1/2" lip attachment inserts into deck and allows improved access from side of truck.

Model No.	Size	Wt.
APT-LIP-36	for 36" long decks	5
APT-LIP-48	for 48" long decks	6
APT-LIP-60	for 60" long decks	7
APT-LIP-72	for 72" long decks	9



Model
APTP-2448-6PY

Adjustable Sheet & Panel Truck with Perforated Deck

2000 lbs. Capacity

Versatile Panel truck is great for moving sheets of plywood, drywall, or any other sheet material. Heavy-duty 12 gauge deck with round perforations. Includes two upright dividers that extend 27" above the deck. Uprights can be placed in 4 positions. Two rigid and two swivel casters with 6" x 2" non-marking polyurethane wheels. Additional uprights, Pushbar Handle, or Lip Attachment are available.

Deck	Model No.	Wt.
24 x 36	APTP-2436-6PY	95
24 x 48	APTP-2448-6PY	111



6-Wheel Adjustable Sheet and Panel Truck

3600 lbs. Capacity

Perfect for moving plywood, drywall, or any sheet products in tight quarters. Six wheel design ensures high maneuverability and “zero turn” capability. Rolls smoothly on 6” non marking Polyurethane wheels. Includes two heavy-duty uprights that extend 27” above the deck and are adjustable in four positions. Additional uprights are also available.

Deck Size	Model No.	Wt.
24 x 48	APT6W-2448-6PY	131
24 x 60	APT6W-2460-6PY	148
30 x 48	APT6W-3048-6PY	146
30 x 60	APT6W-3060-6PY	164
30 x 72	APT6W-3072-6PY	184
36 x 60	APT6W-3660-6PY	179
36 x 72	APT6W-3672-6PY	201




**Model
APT6W-2460-6PY**

Panel Truck

1000 lbs. Capacity

For transporting panels, roll goods and other long items. Three removable uprights extend 27” above the deck. Load space between uprights is 9-1/2”. Swivel casters have 5” non-marking polyurethane wheels. Available with choice of wood or carpet covered wood rails to protect the load.

	Model No.	Size W x L	Wt.
Wood Ends	◆ PT-2436-5PY	24 x 36	78
Carpeted Ends	◆ PTC-2436-5PY	24 x 36	80

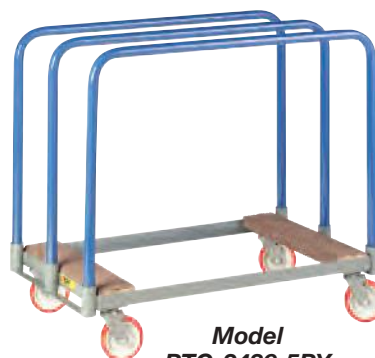

**Model
PTC-2436-5PY**

Lumber & Panel Cart

3600 lbs. Capacity

Versatile truck transports plywood panels and drywall, as well as lumber, pipe, and other long bulky products. Uprights are 27” and 36” high above the 12 gauge steel deck. Uprights are spaced 6” apart on 24”W deck, 6” and 12” on 30”W deck. Non-marking 6” x 2” polyurethane wheels with 2 rigid and 4 swivel casters. Overall height 45”.

Deck	Model No.	Wt.
24 x 48	LC-2448-6PY	99
30 x 48	LC-3048-6PY	109



**Model
LC-2448-6PY**

Perforated Deck Lumber Cart

2000 lbs. Capacity

Four swivel casters with 6” Polyurethane wheels for maneuverability in the tightest spaces. Perforated steel deck prevents accumulation of moisture and debris. Inside rail height 34”, outside rail height 24” above deck. Inside rail spacing 9”, outside rail spacing 5-1/2”. Powder coated gray finish.

Overall W x L	Model No.	Wt.
24 x 36	LCP-2436-S-6PY	96

**Model
LCP-2436-S-6PY**





Model
AF2448



Floor Lock

"A" Frame Sheet & Panel Truck

2000 lbs. Capacity

Panels can be loaded on both sides, with room between the uprights to transport additional materials. 12 gauge deck has a 1-1/2" retaining lip on each side. Frame is 48" above deck with uprights 12" apart at base. 6" phenolic casters, 2 swivel and 2 rigid, or 4 swivel for maneuverability.

Size	4 Swivel Casters		2 Swivel/2 Rigid Casters	
	Model No.	Wt.	Model No.	Wt.
24 x 36	AF2436	108	AF2436-2R	107
24 x 48	AF2448	122	AF2448-2R	121
24 x 60	AF2460	137	AF2460-2R	136
24 x 72	AF2472	151	AF2472-2R	150
30 x 48	AF3048	134	AF3048-2R	134
30 x 60	AF3060	150	AF3060-2R	149
30 x 72	AF3072	167	AF3072-2R	166
36 x 72	AF3672	184	AF3672-2R	183

Floor Lock: Available on models with 2 rigid casters, add: **-FL**
For 6" x 2" Polyurethane Casters, use wheel code: **-6PY**



Model
DC-2444-8PY



Model
DC-2444-8PY-KD

Drywall Cart

2000 lbs. Capacity

Steel deck is 12 gauge 14" x 44" and is sloped to help retain the load. Four swivel 8" x 2" casters. Overall 24"W x 44"L x 51"H

8" x 2" Polyurethane		8" x 2" Mold-On Rubber	
Model No.	Wt.	Model No.	Wt.
DC-2444-8PY	98	DC-2444-8MR	108

Knock-Down Drywall Cart

Quick and easy pocket mount set-up and knock-down design with angle iron top cross brace.

8" x 2" Polyurethane		8" x 2" Mold-On Rubber	
Model No.	Wt.	Model No.	Wt.
DC-2444-8PY-KD	89	DC-2444-8MR-KD	99



Model
SH-36-4S-5PYTL



Sheet Hand Truck

600 lbs. Capacity

Move full 4' x 8' sheets as a one-man job! Wheel locks prevent the front wheels from rolling or rotating during load/unload. 4" deep nose plate allows for several sheets to be moved at once. 4 swivel casters allow for sideways movement through 36" wide door openings. Waist-high handles allow for comfortable movement and positioning.

- All-welded frame
- 5" x 1-1/4" poly wheels with total locks on front set

Overall W x D x H	Model No.	Wt.
36 x 34 x 38	SH-36-4S-5PYTL	68



Adjustable Sheet & Panel Rack

For stationary storage of panels and sheet material. Smooth 12 gauge steel deck has 4" underclearance. Supplied with 3 upright dividers that extend 27" above the deck. Legs have foot pads with anchor holes.

Deck Size D x W	Model No.	Wt.
30 x 48	ASR-3048	137
30 x 60	ASR-3060	160
36 x 60	ASR-3660	176

Additional uprights may be ordered separately.

Model No.	Size W x L	Wt.
004-0024	for 48" long decks	18
004-0023	for 60" long decks	21



**Model
ASR-3048**

Vertical Sheet Rack

Welded construction with 1-5/16" OD tubular dividers on a base of square tubing and angle iron that includes lag down holes and keeps stored materials up off the floor. Storage bays (4 total) are 7" wide with 1500 lbs. capacity each. Upright dividers are 27", 36", and 42" high. Frame and uprights are all welded and coated in a durable gray powder coat for long lasting performance.

Overall W x D x H	Model No.	Wt.
48 x 36 x 43-1/2	SR-3648	95



**Model
SR-3648**

Knock-Down Adjustable Sheet Rack

Upright dividers adjust on 2" increments allowing the user to configure the rack to their individual specifications. Ships knocked down to save on freight.

Overall W x D x H	Model No.	Wt.
48 x 36 x 43-1/2	SR-3648-KD	94




**Model
SR-3648-KD**

Big Wheel Cradle Truck

Carries a variety of loads, including lumber, tool boxes, and pipe up to 20" diameter. Extra large 16" pneumatic wheels with roller bearings and 4 ply tires roll over the roughest surfaces. Carrier bed is constructed of 3/16" plate and measures 30" long x 12" x 12". Offset "T" handle allows for 2 hand grip and greater control of load.

Model No.	Capacity	Wt.
TB-1	1000 lbs.	90



**Model
TB-1**



Model
BCT-2860

Bar Cradle Truck with Pushbar Handle

5000 lbs. Capacity

Heavy-duty all-welded 3" x 1-1/2" channel frame construction. 12" x 2-1/2" phenolic load wheels and 8" x 2" swivel casters with 1/2" tilt. The ergonomic pushbar T-handle is made of 1-1/2" square tubing and can be inserted into pockets in each corner for versatility. Cradle size 24"W x 14"H. Durable powder coated gray finish.

Overall W x L	Model No.	Wt.
28 x 60	BCT-2860	213



Model
ERBST-2424-6PH



Model
ERBST-2448-6PH



ERGONOMIC Bar Cradle Truck

3000 lbs. Capacity

Ergonomic 20" Bed Height - Less bending means easier loading and unloading, and keeps material closer to most machine heights.

Highly Maneuverable - Four swivel casters with 6" hard tread phenolic wheels allow movement in any direction. Useful in tight work areas with long loads and when moving around corners.

3000 lbs. Capacity Each - Use for both transport and storage. Combine multiple units for greater capacity and to support longer loads. Loads on single units must be centered on truck

Overall W x L x H	Cradle ID W x H	Model No.	Wt.
24 x 24 x 34	21" x 14"	ERBST-2424-6PH	75
24 x 36 x 34	21" x 14"	ERBST-2436-6PH	83
24 x 48 x 34	21" x 14"	ERBST-2448-6PH	91

Adjustable Shelf Rack

Configure this rack to your exact "lean manufacturing" requirements. Standard model includes two 15" deep x 36" wide shelves that are adjustable on 2" increments, allowing you to place your parts, tools, or supplies at the optimal ergonomic height. Add optional accessories to customize the rack to fit your needs. The 9-1/4" high deck surface measures 9" deep x 42" across with 1" retaining lip. All-welded construction with 2 swivel and 2 rigid 6" phenolic wheels and powder coated surface results in a durable unit that will stand up to the harshest environments.

W x D x H	Model No.	Wt.
40 x 36 x 67	ABS-3640-6PH	143



Model
ABS-3640-6PH

Additional Flush Shelves

1-1/2" lip along the back, flush edge on 3 sides. Ideal for long and oversize items.

Model No.	Wt.
AF-SHELF-FLUSH	18



Portable Bar & Pipe Truck

Rugged, all-welded construction with 3 load levels. Structural channel uprights with 1-1/2" square tube arms have 4-1/2" high stops on ends for load retention. 12 gauge steel lower deck stores and transports smaller part, packages, etc. Platform height 11", overall height 58".

Four swivel casters for maneuverability with 8" x 2" phenolic wheels for ease of movement. Wheel brakes on all four wheels to help prevent unwanted movement.

Capacity 3600 lbs. overall, 2000 lbs. per level evenly distributed. Horizontal storage space (each side):
Top = 7-1/2", Middle = 11", Bottom = 15"

Model No.	Deck Size	Overall Length	Wt.
BRT-3648-8PHBK	36 x 48	48	195
BRT-3660-8PHBK	36 x 60	60	215
BRT-3672-8PHBK	36 x 72	72	236



**Model
BRT-3660-8PHBK**

Vertical Bar Rack

Frees up floor space by storing odd shapes & lengths vertically. Bays are 10-1/2" wide with security chain and hooks. Capacity 1500 lbs. per bay.

Overall W x D x H	Model No.	Wt.
48 x 24 x 60	BR-2448-60	87

**Model
BR-2448-60**



Vertical Bar Rack

24" D x 36" W 12 gauge steel base. Includes 3 trays - 6", 9-1/2", and 13" deep to hold loose items. Uprights are 1-1/2" angle with an overall height of 84". The three bays are 10" wide and include security chains and hooks. Base has punched holes ready for mounting to the floor. All welded construction, ships fully assembled and ready for use. Durable powder coated gray finish.

Overall W x D x H	Model No.	Wt.
36 x 24 x 84	BR-2436-84	120

**Model
BR-2436-84**





Model
NBP-2448-8PUBK



Model
NBP6W-2448-6PY



Model
DT-2448-DIA-4PS



Model
OE-2448-6PY

Pipe Stake Trucks

Ideal for transporting roll goods and other long, bulky loads. Removable 1-5/16" diameter pipe stakes extend 30" above the reinforced 12 gauge deck. 2 rigid and 2 swivel casters with brakes.

	8" x 2" MOLD-ON RUBBER 2400 lbs. Capacity		8" x 2" POLYURETHANE 3600 lbs. Capacity	
Deck Size	Model No.	Wt.	Model No.	Wt.
24 x 36	NBP-2436-8MRBK	88	NBP-2436-8PUBK	79
24 x 48	NBP-2448-8MRBK	99	NBP-2448-8PUBK	90
30 x 48	NBP-3048-8MRBK	119	NBP-3048-8PUBK	110
30 X 60	NBP-3060-8MRBK	131	NBP-3060-8PUBK	125
36 X 72	NBP-3672-8MRBK	161	NBP-3672-8PUBK	152

6-Wheel Pipe Stake Trucks

Two center-mount rigid and four swivel casters for maneuverability and load stability. Deck is 9" high with 1/2" tilt.

	6" X 2" MOLD-ON RUBBER 2000 lbs. Capacity		6" x 2" POLYURETHANE 3600 lbs. Capacity	
Deck Size	Model No.	Wt.	Model No.	Wt.
24 x 48	NBP6W-2448-6MR	131	NBP6W-2448-6PY	117
30 x 48	NBP6W-3048-6MR	147	NBP6W-3048-6PY	132
30 X 60	NBP6W-3060-6MR	166	NBP6W-3060-6PY	151
36 X 72	NBP6W-3672-6MR	197	NBP6W-3672-6PY	182

Heavy-Duty Pipe Stake Trucks

Center mounted 12" x 2-1/2" load wheels with two 8" x 2" swivel casters arranged in a diamond pattern. Deck is 14" high with 1/2" tilt.

	RUBBER TREAD ON STEEL WHEELS 3000 lbs. Capacity		POLYURETHANE TREAD ON STEEL WHEELS 4000 lbs. Capacity	
Deck Size	Model No.	Wt.	Model No.	Wt.
24 x 48	R-2448-DIA-4PS	173	DT-2448-DIA-4PS	190
30 x 48	R-3048-DIA-4PS	181	DT-3048-DIA-4PS	198
30 X 60	R-3060-DIA-4PS	192	DT-3060-DIA-4PS	209
30 X 72	R-3072-DIA-4PS	201	DT-3072-DIA-4PS	219
36 X 60	R-3660-DIA-4PS	202	DT-3660-DIA-4PS	219
36 X 72	R-3672-DIA-4PS	215	DT-3672-DIA-4PS	232

Roll Goods Truck

3600 lbs. Capacity

Welded uprights on two sides of the 12 gauge steel deck are heavy 1-5/16" O.D. tubing. Uprights extend 48" above the deck, with a welded top cross brace for additional strength and rigidity. 2 swivel and 2 rigid casters with 6" x 2" non-marking polyurethane wheels. Durable powder coated finish.

Deck	Model No.	Wt.
24 x 48	OE-2448-6PY	136
24 x 60	OE-2460-6PY	148
30 x 48	OE-3048-6PY	145
30 x 60	OE-3060-6PY	161

For Floor Lock add: -FL




Steel Deck Dollies

1000 lbs. Capacity

Ideal for transporting tote boxes, crates, machinery, etc. Formed 12 gauge steel with a 1-1/2" lip up or down. Won't warp or splinter. Four swivel casters with 3" x 1-1/4" hard rubber wheels. Powder coated gray. Available with solid deck, or smooth perforated deck that allows debris and moisture to pass through.

Deck Style	Size	Lip Up Model	Wt.	Lip Down Model	Wt.
Solid	18 x 24	MU-1824-3R	23	MD-1824-3R	23
	18 x 32	MU-1832-3R	28	MD-1832-3R	28
	24 x 36	MU-2436-3R	38	MD-2436-3R	38
Perforated	24 x 36	MUP-2436-3R	34	MDP-2436-3R	34

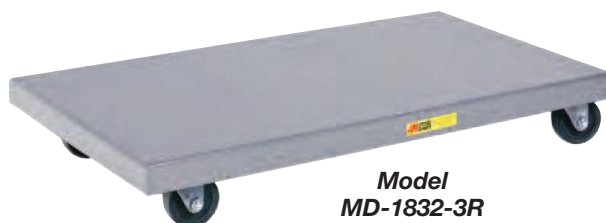

**Model
MD-1832-3R**



**Model
MUP-2436-3R**

SHIPS
UPS

Heavy Duty Steel Deck Dolly

1200 lbs. Capacity

Oversized 12 gauge steel deck with four swivel casters with 5" non marking polyurethane wheels. Use for transporting oversized containers or loads. Deck height is 6-3/8" from floor. Available with a flush deck or with a 1-1/2" retaining lip. Durable powder coated gray finish.

Deck Size	Lip Up Models	Wt.	Lip Down Models	Wt.
24 x 48	MU-2448-5PY	43	MD-2448-5PY	43
30 x 48	MU-3048-5PY	50	MD-3048-5PY	50
30 x 60	MU-3060-5PY	59	MD-3060-5PY	59



**Model
MD-2448-5PY**

Angle Iron Dollies

1-1/2" x 1-1/2" x 1/8" welded angle iron construction. Available with 1-1/2" lip, or flush edges. Ships fully assembled and ready for use. 3" x 1-1/4" hard rubber swivel casters with 1000 lbs. capacity.

Size	Lip Up Models	Lip Down Models	Wt.
18 x 24	ADU-1824-3R	ADD-1824-3R	18
18 x 32	ADU-1832-3R	ADD-1832-3R	20
24 x 36	ADU-2436-3R	ADD-2436-3R	24



**Model
ADU-1832-3R**



**Model
ADD-1832-3R**

SHIPS
UPS



Model
PDSH-4048-6PH-2FL



Model
PDS-4048-6PH-2FL

Solid Deck Pallet Dolly

Pallet sized dollies with a solid deck. Available with optional push handle or T-Handle. Decks are 12 gauge steel. 6" high-capacity phenolic wheels on 4-swivel casters are long lasting and easy rolling on smooth floors. Order with 2 floor locks when you need to keep dolly in place with loading or unloading. Also available with removable pipe handle that extends 29" above the deck.

SIZE W x L	Model No.	Wt.	Model No.	Wt.
	Dolly Only		Dolly With Floor Locks	
40 x 48	PDS-4048-6PH	115	PDS-4048-6PH2FL	125
42 x 48	PDS-4248-6PH	118	PDS-4248-6PH2FL	128
48 x 48	PDS-4848-6PH	128	PDS-4848-6PH2FL	138
SIZE	Dolly With Handle		With Handle & Floor Locks	
40 x 48	PDSH-4048-6PH	127	PDSH4048-6PH2FL	137
42 x 48	PDSH-4248-6PH	130	PDSH4248-6PH2FL	140
48 x 48	PDSH-4848-6PH	140	PDSH4848-6PH2FL	150



Also available with
Corner Retainers to
keep pallet in position.



Model
PDST-4048-6PH

Solid Deck Pallet Dolly with T-Handle

All welded solid deck steel pallet dolly with bolt on T handle for improved maneuverability. Deck height - 9". 2 rigid and 2 swivel casters with 6" phenolic wheels. Available with an optional floor lock. Gray powder coat finish.

SIZE W x L	Dolly with Pull Handle		Dolly with Pull Handle & One Floor Lock	
	Model No.	Wt.	Model No.	Wt.
40 x 48	PDST-4048-6PH	121	PDST-4048-6PHFL	126
42 x 48	PDST-4248-6PH	124	PDST-4248-6PHFL	129
48 x 48	PDST-4848-6PH	134	PDST-4848-6PHFL	139



Model
PDSE-4848-6PH2FL

Solid Deck Adjustable Height Pallet Stand

3600 lbs. Capacity

Skid sized solid deck is raised to a comfortable work height to lessen bending and back strain. 12 gauge steel deck adjusts in 2" increments from a height of 24" to 34" when measured from the floor. 6" swivel casters with phenolic wheels and 2 floor locks to keep the unit stationary during loading and unloading. All welded construction with durable gray powder coat finish.

SIZE W x L	Dolly with Floor Locks	
	Model No.	Wt.
40 x 48	PDSE4048-6PH2FL	157
42 x 48	PDSE4248-6PH2FL	163
48 x 48	PDSE4848-6PH2FL	173



Pallet Dollies

Convenient, easy-rolling maneuverability for pallets and crates. Four swivel casters with 6" x 2" phenolic wheels and 3600 lbs. capacity. Welded steel construction with durable powder coat finish ships fully assembled. Deck height is 9". Available with double Floor Locks to prevent unwanted movement. Also available with removable pipe handle that extends 29" above the deck.

SIZE W x L	Model No.	Wt.	Model No.	Wt.
	Dolly Only		Dolly With Floor Locks	
40 x 48	PD-4048-6PH	75	PD-4048-6PH2FL	85
42 x 48	PD-4248-6PH	76	PD-4248-6PH2FL	86
48 x 48	PD-4848-6PH	77	PD-4848-6PH2FL	87
SIZE	Dolly With Handle	Wt.	With Handle & Floor Locks	Wt.
40 x 48	PDH-4048-6PH		PDH-4048-6PH2FL	
42 x 48	PDH-4248-6PH	88	PDH-4248-6PH2FL	98
48 x 48	PDH-4848-6PH	89	PDH-4848-6PH2FL	99

Also available with
Corner Retainers to
keep pallet in position.



Model
PDH-4048-6PH-2FL



Model
PD-4048-6PH

Pallet Dolly with T-Handle

All-welded pallet dolly with "T-handle" for easy pulling of loaded dolly. Includes 2 vinyl handgrips for comfortable grip. 2 swivel, 2 rigid 6" x 2" phenolic casters. 3600 lbs. capacity.

SIZE W x L	Dolly with Pull Handle	Wt.	Dolly with Pull Handle & One Floor Lock	Wt.
	Model No.		Model No.	
40 x 48	PDT-4048-6PH	81	PDT-4048-6PHFL	86
42 x 48	PDT-4248-6PH	82	PDT-4248-6PHFL	87
48 x 48	PDT-4848-6PH	83	PDT-4848-6PHFL	88



Model
PDT-4048-6PH

Ergonomic Adjustable Height Mobile Pallet Stand

3600 lbs. Capacity

Move pallets without a forklift! Platform height is adjustable between 24" up to 34" in 2" increments to optimize ergonomic height for bending and lifting. Rolls smoothly on 6" swivel casters with phenolic wheels. Dual floor locks keep unit in place when loading and unloading. Available in two standard pallet sizes. All-welded steel construction. Powder-coated for durability. Ships fully assembled.

Deck Size	Lip Shelves	Wt.
40 x 48	PDE-4048-6PH2FL	107
42 x 48	PDE-4248-6PH2FL	109
48 x 48	PDE-4848-6PH2FL	114



Model
PDE-4848-6PH2FL



**Model
RD-4846-4**

SOLID STEEL Rack Decking

Smooth 14 gauge steel surface with durable powder coated finish. 12 gauge reinforcing channels on underside fit 1-5/8" step beams. 1-1/2" waterfall on front & back edges. Each decking section has a load capacity of 3000 lbs.

Section Width	24" Overall Depth (21-1/4" channels)		36" Overall Depth (32-1/4" channels)		42" Overall Depth (38-1/4" Channels)		48" Overall Depth (44-1/4" Channels)	
	Model No.	Wt.	Model No.	Wt.	Model No.	Wt.	Model No.	Wt.
46	RD-2446-3	40	RD-3646-3	58	RD-4246-3	65	RD-4846-4	82
52	RD-2452-3	41	RD-3652-3	61	RD-4252-3	71	RD-4852-4	89
58	RD-2458-3	44	RD-3658-3	66	RD-4258-3	77	RD-4858-4	96




**Model
RDP-4848-4**

PERFORATED STEEL Rack Decking

14 gauge steel deck with 1" diameter hole perforations. 12 gauge reinforcement channels fit 1-5/8" step beams. Each deck has a 1-1/2" waterfall on front and rear. Deck measures 46" wide. Available in 3 standard rack depths - 36", 42", 48". Durable powder coated gray finish.

Deck Size D x W	Model No.	Wt.
36 x 46	RDP-3646-3	54
42 x 46	RDP-4246-3	60
48 x 46	RDP-4846-3	77

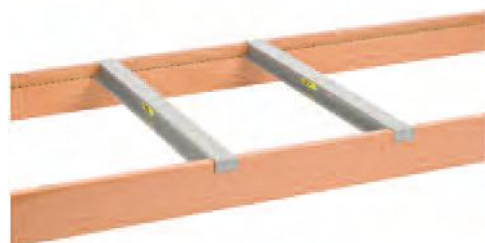

**Model
RDB-48**

Skid Supports

2500 lbs. Capacity per pair

Supports loads that are smaller than the shelf depth. No Tools needed! Constructed from 12 gauge steel these supports hook over the pallet rack cross beams for extra stability. Durable gray powder coat finish. Available in standard racking depths - 36", 42" and 48" deep.

Size	Model No.	Wt.
36"	RDB-36	11
42"	RDB-42	13
48"	RDB-48	14



**Model
PP-2-12**



**Model
PP-3-12**



**Model
PP-4-12**

SOLID STEEL Post Protectors

Protect pallet rack uprights from damage. 3/16" thick formed steel with durable powder coated safety yellow finish. Available in 3 styles and 3 heights for protecting ends and corners. Lag holes are 9/16" diameter. Mounting hardware not included.

Two-Sided (Corner Style)			Three-Sided			Three-Sided with Form		
Height	Model No.	Wt.	Height	Model No.	Wt.	Height	Model No.	Wt.
12"	PP-2-12	5	12"	PP-3-12	7	12"	PP-4-12	7
17"	PP-2-17	7	17"	PP-3-17	10	17"	PP-4-17	10
23"	PP-2-23	9	23"	PP-3-23	13	23"	PP-4-23	13

HEAVY-DUTY

Welded Steel Shelving

Reinforced 12 gauge steel shelves with 2000 lbs. capacity per shelf. 2" x 2" x 3/16" corner angles have footpads with anchor. 72" overall height with 3-1/2" bottom shelf under-clearance. Ships set up and ready for immediate use.

D x W	4 Shelf 20-3/4" Shelf Clearance		5 Shelf 15" Shelf Clearance	
	Model No.	Wt.	Model No.	Wt.
18 x 32	4SH-1832-72	156	5SH-1832-72	179
24 x 36	4SH-2436-72	195	5SH-2436-72	227
24 x 48	4SH-2448-72	253	5SH-2448-72	299
24 x 60	4SH-2460-72	298	5SH-2460-72	356
30 x 48	4SH-3048-72	291	5SH-3048-72	364
30 x 60	4SH-3060-72	344	5SH-3060-72	414
30 x 72	4SH-3072-72	421	5SH-3072-72	511
36 x 60	4SH-3660-72	394	5SH-3660-72	475
36 x 72	4SH-3672-72	478	5SH-3672-72	583



Model
5SH-2448-72

WELEDDED

Gravity Flow Shelving

12 gauge steel shelves reinforced with 1-1/2" angle are sloped 15° to provide easy access and make the contents more visible to your employees. 2" x 2" x 3/16" corner angles with footpads and mounting holes to anchor the shelves to the floor. Each shelf has 1/2" retaining lip to retain the items. Shelf openings are 18". 3-1/2" clearance under the unit provides access for a pallet jack.

Shelf Size D x W	Model No.	Wt.
24 x 48	4SHS-2448-72	282
24 x 60	4SHS-2460-72	332



Model
4SHS-2448-72

HEAVY-DUTY

Tool and Die Shelving

1000 lbs. per shelf Capacity

Two roll-out shelves extend 100% for ease of access. Great for heavy tooling, dies, and large parts that require an over-head crane or forklift to load and unload.

The frame is built of 1/4" thick structural angle. Roll-out shelves are reinforced with 7 gauge steel and 12 gauge decks. Roll-out shelves measure 48" wide x 36" deep. Fixed top shelf provides additional storage space. Shelf clearance is 22". Unit comes with lag holes for anchoring to the floor. Ships partially set up. Some assembly required.

Overall W x D x H	Model No.	Wt.
53 x 36 x 60	HRS-3648-3	585



Model
HRS-3648-3

Special sizes and more shelves available upon request.



Model
BDR-2448-5PYBK



Die Storage Cart

1200 lbs. Capacity

Stores and conveniently transports most common brake dies in an upright position to save space and stay well organized. Each of the two levels has 9 slots measuring 5/8" wide x 48" long on 2-1/8" centers to accept a standard 1/2" die tang. Bottom shelf is 12 gauge with a 1-1/2" lip to retain small parts. 2 swivel, 2 rigid 5" x 1-1/4" polyurethane casters. Durable powder coated finish.

Size W x L x H	Model No.	Wt.
24 x 48 x 36	BDR-2448-5PYBK	280



Model
ED-3036-6PHFL

Ergonomic Die Cart

1500 lbs. Capacity

Adjustable height cart with heavy-duty roller top to allow smooth transfer of dies, molds or any other heavy product. Roller Height adjusts in 2" increments from 28" to 36". Floor lock secures cart in position during loading and unloading. 6" Phenolic casters, 2 swivel 2 rigid. 1-1/2" removable angle stops keep load in place during transport.

Size	Model No.	Wt.
30 x 36	ED-3036-6PHFL	201



Model
MTB1-2436-3R



Ball Transfer Machine Table

Ball transfer rails mounted on a 12 gauge welded steel machine table measuring 36" wide by 24" deep. Use to smoothly rotate or transfer materials in all directions. Each rail contains twelve 3/4" diameter steel balls that are protected from abuse by the steel housing. Available in either a mobile version with 3" rubber wheels with brakes or a stationary version with height adjustable leg levelers. Fully assembled and ready for immediate use. **Custom heights available.**

3" RUBBER WHEELS			LEG LEVELERS		
Height	Model No.	Wt.	Height	Model No.	Wt.
36	MTB1-2436-36-3R	78	34-1/4-37	MTB1-2436-36-LL	72
42	MTB1-2436-42-3R	81	40-1/4-43	MTB1-2436-42-LL	75
48	MTB1-2436-48-3R	84	46-1/4-49	MTB1-2436-48-LL	78

WELDED STEEL Mobile Storage Bins

HEAVY-DUTY

All-welded 12 gauge steel construction with powder coated finish for rugged durability.

OPEN HOPPER FRONT

Each level has overall dimensions of 12-1/2"H x 15"D x 32"W.

WELDED DIVIDERS

Available with up to 4 permanent storage compartments per level

HEAVY 6" X 2" CASTERS

4-swivel casters with hard tread phenolic wheels for ease of movement. Mobile units allow you to bring the parts to the workspace. They can also be repositioned with changing requirements.

Overall Dimensions: 32" wide x 45-1/2" high x 20" deep. 800 lbs. capacity per tier. 2400 lbs. overall capacity.

Model No.	Openings per Level	Total Openings	OPENING SIZE			Wt.
			W	H	D	
MS1-1532-6PH	1	3	32"	12-1/2"	15"	210
MS2-1532-6PH	2	6	16"	12-1/2"	15"	217
MS3-1532-6PH	3	9	10-1/2"	12-1/2"	15"	235
MS4-1532-6PH	4	12	8"	12-1/2"	15"	252



MS2-1532-6PH



MS1-1532-6PH

MS3-1532-6PH

MS4-1532-6PH

Stationary Storage Bins

Same heavy duty construction as our popular Mobile Storage Bins, now in a stationary version. All welded 12 gauge steel bins with durable gray powder coated finish. The stationary versions have Fork Pockets to allow easy transport and positioning without having to empty the bins. Fork pockets with 8" x 4" opening are designed for use with either a fork truck or a standard pallet jack.

Available with 1, 2, 3, or 4 compartments per level. Overall dimensions 32" wide x 42" high x 20" deep. Shelf capacity - 800 lbs. Total Capacity - 2400 lbs.

Model No.	Openings per Level	Total Openings	OPENING SIZE			Wt.
			W	H	D	
MS1-1532-FP	1	3	32"	12-1/2"	15"	206
MS2-1532-FP	2	6	16"	12-1/2"	15"	213
MS3-1532-FP	3	9	10-1/2"	12-1/2"	15"	231
MS4-1532-FP	4	12	8"	12-1/2"	15"	248



MS3-1532-FP



MS1-1532-FP

MS2-1532-FP

MS4-1532-FP



**Model
SLN-2448**



**Model
SL2-A-2448**

All-Welded Storage Lockers

Secure, visible storage for larger, bulkier items. 13 gauge expanded metal has small 3/4" x 1-1/2" diamond-shaped openings. Doors swing open a full 270 degrees and feature a padlockable slide latch. 4" underclearance for transporting with pallet truck or fork lift. 72" interior height, 78" overall height. Welded unit ships set up and ready for immediate use.

Interior* D x W	No Center Shelves Model No.	Wt.	1 Center Shelf Model No.	Wt.	2 Center Shelves Model No.	Wt.
24 x 48	SLN-2448	230	SL1-2448	253	SL2-2448	283
24 x 60	SLN-2460	258	SL1-2460	287	SL2-2460	324
30 x 48	SLN-3048	241	SL1-3048	270	SL2-3048	307
30 x 60	SLN-3060	276	SL1-3060	312	SL2-3060	357
30 x 72	SLN-3072	307	SL1-3072	372	SL2-3072	447
36 x 60	SLN-3660	309	SL1-3660	374	SL2-3660	449
36 x 72	SLN-3672	357	SL1-3672	435	SL2-3672	524

* Note: For Outside Dimensions- Depth add 3", Width add 1"

Adjustable Shelf Models

Welded Storage Locker with 1 or 2 adjustable center shelves. Shelves are adjustable on 3-1/2" centers, from 12" to 60" above the bottom deck, and are also removable.

Interior* D x W	1 Adjustable Center Shelf Model No.	Wt.	2 Adjustable Center Shelves Model No.	Wt.
24 x 48	SL1-A-2448	289	SL2-A-2448	313
24 x 60	SL1-A-2460	323	SL2-A-2460	354
30 x 48	SL1-A-3048	306	SL2-A-3048	337
30 x 60	SL1-A-3060	348	SL2-A-3060	387

* Note: For Outside Dimensions- Depth add 3", Width add 1"



**Model
SC-2448-NC**

VISIBLE CONTENTS

Welded Storage Lockers

2000 lbs. Capacity

These stationary security cabinets measure only 52" overall height. Small diamond shaped openings and heavy gauge steel provide maximum security for small items. The double doors swing open 270 degrees, and feature padlockable slide latch. 48" interior cabinet height. Oversized footpads for better weight distribution, 4" underclearance. All-welded steel construction with durable powder coated finish.

Adjustable Shelf Models

Removable center shelf is adjustable in 3-1/2" increments.

Interior* D x W	No Center Shelf		1 Fixed Center Shelf		2 Fixed Center Shelves		1 Adjustable Center Shelf	
	Model No.	Wt.	Model No.	Wt.	Model No.	Wt.	Model No.	Wt.
24 x 48	SCN-2448-NC	174	SC-2448-NC	204	SC2-2448-NC	234	SC-A-2448-NC	230
24 x 60	SCN-2460-NC	184	SC-2460-NC	216	SC2-2460-NC	254	SC-A-2448-NC	240
30 x 48	SCN-3048-NC	184	SC-3048-NC	218	SC2-3048-NC	255	SC-A-3048-NC	246
30 x 60	SCN-3060-NC	233	SC-3060-NC	263	SC2-3060-NC	308	SC-A-3060-NC	291
30 x 72	SCN-3072-NC	284	SC-3072-NC	331	SC2-3072-NC	406		—
36 x 60	SCN-3660-NC	280	SC-3660-NC	333	SC2-3660-NC	408		—
36 x 72	SCN-3672-NC	338	SC-3672-NC	380	SC2-3672-NC	439		—

* Note: For Outside Dimensions- Depth add 3", Width add 1"

Combination Cabinets with 2 Half Shelves

Three half shelves for neatly storing smaller items, and one full-height opening for your larger, bulkier items. Expanded metal provides both visibility and ventilation. Doors open 270 degrees back to the sides and out of the way. All-welded unit ships set up and ready to use. 78" overall height, with 4" underclearance. Interior height 72". Padlockable slide latch. Durable powder coated finish.

Interior* D x W	Model No.	Wt.
24 x 48	SLC-2-2448	284
24 x 60	SLC-2-2460	319
30 x 48	SLC-2-3048	304
30 x 60	SLC-2-3060	347

* Note: For Outside Dimensions- Depth add 3", Width add 1"



Model
SLC-2-3048

Tool Storage Locker with Pegboard

Perfect for your "lean manufacturing" shop. Efficiently organize your tools, supplies and equipment without clutter. Quickly locate the tool you need in seconds. The 16 gauge steel pegboard with holes 1" on center uses standard pegboard hooks. Use tool outlines to immediately indicate when a tool is missing. The 13 gauge steel mesh provides both visibility and security. Doors fully open 270 degrees and feature a padlockable slide latch. Has one shelf located 19" above base. 72" interior height. 78" overall height with 4" leg clearance to allow transporting by pallet truck or fork lift. (Pegs and bins not included.)

Interior* D x W	Model No.	Wt.
24 x 48	SL1-2448-PB	295
24 x 60	SL1-2460-PB	339
30 x 48	SL1-3048-PB	312
30 x 60	SL1-3060-PB	364

* Note: For Outside Dimensions- Depth add 3", Width add 1"



Model
SL1-2448-PB

ALL-WELDED COMPACT Storage Locker

Compact all-welded storage locker has five 14 gauge shelves and heavy-duty padlockable slide latch. High-visibility 13 gauge expanded metal siding. Footpads have holes for lagging to floor. Right hand door swings 270° flush to side. 78" overall height. 4" under-clearance. Durable powder coated gray finish.

Interior* D x W	Model No.	Wt.
24 x 24	SL5-2424-78	223

Shelf clearance from bottom to top: 16.5", 16.5", 12", 10", 10".

* Note: For Outside Dimensions- Depth add 3", Width add 1"



Model
SL5-2424-78



2 Adjustable Shelves
Model
SSL2-A-2448

High Capacity Storage Cabinet

2000 lbs. Capacity

Rugged 12 gauge all-welded cabinet is designed for long term use in the most demanding environments. Secure 3 point latching system with keyed handle secures the doors at the top, center, and bottom. 14 gauge shelves are adjustable in 3-1/2" increments. Door swing is 180 degrees allowing complete access to the interior. Durable powder coated gray finish. Overall height 78".

Interior D x W	2 Adj. Shelves Model No.	Wt.	3 Adj. Shelves Model No.	Wt.
24 x 48	SSL2-A-2448	486	SSL3-A-2448	516
24 x 60	SSL2-A-2460	567	SSL3-A-2460	604
30 x 48	SSL2-A-3048	542	SSL3-A-3048	579
30 x 60	SSL2-A-3060	631	SSL3-A-3060	677



Model
SSL2-A-2448



Model
SSLP2-A-2448

High Visibility Storage Cabinet

Diamond shaped perforated doors allow visibility to the contents inside while maintaining security and organization. Three point locking system with keyed handle. 14 gauge shelves adjust in 3-1/2" increments. Doors open 180 degrees allowing full access to the contents inside. Overall height is 78" with 5-1/2" of underclearance to permit movement by pallet truck. Durable gray powder coated finish.

Interior D x W	2 Adj. Shelves Model No.	Wt.	3 Adj. Shelves Model No.	Wt.
24 x 48	SSLP2-A-2448	477	SSLP3-A-2448	507
24 x 60	SSLP2-A-2460	558	SSLP3-A-2460	595
30 x 48	SSLP2-A-3048	533	SSLP3-A-3048	570
30 x 60	SSLP2-A-3060	622	SSLP3-A-3060	668

High Capacity Storage Cabinet with Pegboard Doors

Heavy duty 12 gauge steel, all welded cabinet. Additionally each door has 16 gauge steel pegboard panels built in for additional storage. Doors fully open 180 degrees to allow complete access. The pegboards have round holes on 1" centers that accept most common hooks and are perfect for keeping your tools visible and easy to grab. Available with 2 or 3 adjustable 14 gauge shelves that adjust on 3-1/2" increments. Keyed handle with 3 point locking system keeps doors secure. Gray powder coat finish.

Interior D x W	2 Adj. Shelves Model No.	Wt.	3 Adj. Shelves Model No.	Wt.
24 x 48	SSL2-A-2448-PBD	531	SSL3-A-2448-PBD	561
24 x 60	SSL2-A-2460-PBD	612	SSL3-A-2460-PBD	649
30 x 48	SSL2-A-3048-PBD	593	SSL3-A-3048-PBD	630
30 x 60	SSL2-A-3060-PBD	682	SSL3-A-3060-PBD	728



Model
SSL2-A-2448-PBD

Mobile Storage Locker Solid Sides

2000 lbs. Capacity

Welded 14 gauge construction with solid sides and top for extra durability while keeping contents out of sight. 6" x 2" polyurethane casters, 2 swivel and 2 rigid. Interior height 48", overall height 56". Doors open 270 degrees and feature padlockable slide latch. Gray powder coat finish.

Interior* D x W	No Center Shelf Model No.	Wt.	1 Center Shelf Model No.	Wt.	2 Center Shelves Model No.	Wt.
24 x 48	SSCN-2448-6PPY	312	SSC-2448-6PPY	342	SSC2-2448-6PPY	372
24 x 60	SSCN-2460-6PPY	344	SSC-2460-6PPY	376	SSC2-2460-6PPY	414
30 x 48	SSCN-3048-6PPY	344	SSC-3048-6PPY	370	SSC2-3048-6PPY	407
30 x 60	SSCN-3060-6PPY	408	SSC-3060-6PPY	438	SSC2-3060-6PPY	438

* Note: For Outside Dimensions- Depth add 3", Width add 1"

Adjustable Shelf Models

One center shelf, adjustable on 3-1/2" centers.

Interior* D x W	Model No.	Wt.
24 x 48	SSC-A-2448-6PPY	372
24 x 60	SSC-A-2460-6PPY	406
30 x 48	SSC-A-3048-6PPY	400
30 x 60	SSC-A-3060-6PPY	468

* Note: For Outside Dimensions- Depth add 3", Width add 1"



Model
SSC-3048-6PPY

Job Site Storage Box

Durable 14 gauge welded steel storage box has a 24" interior height and recessed 1" round handles. Overlapping lid is held open by a locking lid support. Security hasps protect padlocks (not supplied) from bolt cutters. Under clearance is 4". Gray powder coated finish.

Size	Model No.	Wt.
24 x 48	TC-2448	223



Security Hasp



Model
TC-2448



Model
SC-3048-6PPY



Model
SC-A-3048-6PPY



Model
SCN-3048-10SR



Model
SC-A-3048-10SR

HEAVY-DUTY

Mobile Storage Locker

2000 lbs. Capacity

The small 3/4" x 1-1/2" diamond shaped openings and heavy gauge of the flattened expanded metal on this truck provide maximum security for even the smallest items, while still allowing good visibility and air circulation. The double doors swing open a full 270 degrees, back to the sides and out of the way, and have a padlockable slide latch. Interior height 48", overall height 56" with 2 swivel and 2 rigid, 6" x 2" non-marking polyurethane wheels.

Interior* D x W	No Center Shelf Model No.	Wt.	1 Center Shelf Model No.	Wt.	2 Center Shelves Model No.	Wt.
24 x 48	SCN-2448-6PPY	186	SC-2448-6PPY	216	SC2-2448-6PPY	246
24 x 60	SCN-2460-6PPY	196	SC-2460-6PPY	228	SC2-2460-6PPY	266
30 x 48	SCN-3048-6PPY	196	SC-3048-6PPY	230	SC2-3048-6PPY	267
30 x 60	SCN-3060-6PPY	245	SC-3060-6PPY	275	SC2-3060-6PPY	320
36 x 60	SCN-3660-6PPY	292	SC-3660-6PPY	345	SC2-3660-6PPY	420
36 x 72	SCN-3672-6PPY	350	SC-3672-6PPY	392	SC2-3672-6PPY	451

* Note: For Outside Dimensions- Depth add 3", Width add 1"

Adjustable Shelf Models

Mobile Storage Locker with one center shelf, adjustable on 3-1/2" centers. Shelf is also removable.

Interior* D x W	Model No.	Wt.
24 x 48	SC-A-2448-6PPY	242
24 x 60	SC-A-2460-6PPY	252
30 x 48	SC-A-3048-6PPY	258
30 x 60	SC-A-3060-6PPY	303

* Note: For Outside Dimensions- Depth add 3", Width add 1"

Job Site Security Box

Heavy-duty security locker with 10" solid rubber tires permit easy rolling over rough surfaces such as construction sites or other less than perfect floors. Fully welded 1-1/2" angle frame and 13 gauge expanded metal secures your tools and supplies while providing good visibility. The doors open a full 270 degrees to allow complete access. Available with fixed height or adjustable height shelves. Padlockable slide latch keeps your items safe. Interior height 48", overall height 60". 1500 pounds total capacity.

Interior* D x W	No Center Shelf Model No.	Wt.	1 Center Shelf Model No.	Wt.	2 Center Shelves Model No.	Wt.
24 x 48	SCN-2448-10SR	198	SC-2448-10SR	228	SC2-2448-10SR	258
24 x 60	SCN-2460-10SR	208	SC-2460-10SR	240	SC2-2460-10SR	278
30 x 48	SCN-3048-10SR	208	SC-3048-10SR	242	SC2-3048-10SR	279

* Note: For Outside Dimensions- Depth add 3", Width add 1"

Adjustable Shelf Models

Interior* D x W	Model No.	Wt.
24 x 48	SC-A-2448-10SR	254
24 x 60	SC-A-2460-10SR	264
30 x 48	SC-A-3048-10SR	270

* Note: For Outside Dimensions- Depth add 3", Width add 1"

Security Box Truck

1200 lbs. to 3600 lbs. Capacity

Heavy-duty all-welded 1-1/2" angle frame with 13 gauge expanded metal panels provide a durable truck to secure and transport your materials or cargo. Expanded metal sides and top allows easy visibility of contents. Double-hinged top cover has padlock hasp for added security. Front drop-gate with spring latches provide easy access. Interior height - 36". Choose wheels based on rolling surface and capacity required. Available in 6" non-marking polyurethane, 9" pneumatic, and 10" solid rubber.



Model
SB-2448-10SR



Model
SB-2448-6PY

	6" x 2" POLYURETHANE 3600 lbs. Capacity 47" OAH		9" x 3" PNEUMATIC 1200 lbs. Capacity 51" OAH		10" x 2-3/4" SOLID RUBBER 1500 lbs. Capacity 51-1/2" OAH	
Deck Size	Model No.	Wt.	Model No.	Wt.	Model No.	Wt.
24 x 48	SB-2448-6PY	173	SB-2448-9P	176	SB-2448-10SR	185
24 x 60	SB-2460-6PY	195	SB-2460-9P	198	SB-2460-10SR	207
30 x 48	SB-3048-6PY	196	SB-3048-9P	199	SB-3048-10SR	208
30 x 60	SB-3060-6PY	220	SB-3060-9P	223	SB-3060-10SR	232

Security Box Truck with Solid Sides

Heavy-duty all-welded 1-1/2" angle frame with 14 gauge all-welded steel construction protects your items from view and offers complete security. Drop gate front permits easy access to contents. User friendly double hinge cover folds down and back. Padlock hasp provides extra security. Interior height of 36". For rolling over smooth surfaces choose the 6" x 2" mold-on rubber wheels. For rolling over rough surfaces the 10" solid rubber version is the perfect choice.



Model
SBS-2448-10SR



Model
SBS-2448-6MR

	6" x 2" MOLD-ON RUBBER 2000 lbs. Capacity		10" x 2-3/4" SOLID RUBBER 1500 lbs. Capacity	
Deck Size	Model No.	Wt.	Model No.	Wt.
24 x 48	SBS-2448-6MR	272	SBS-2448-10SR	284
30 x 60	SBS-3060-6MR	349	SBS-3060-10SR	361



**Model
CA-2448-6MR
with Optional Drop-Gate**



Drop-Gate open



Drop-Gate removed

Removable Drop-Gate Truck

2000 lbs. Capacity

3-Sided bulk handling truck converts into a 4 sided box truck with the addition of a removable half "Drop-Gate" panel. Hinged in the center, it can easily be lowered to provide better access while loading or unloading, or raised and latched to secure contents for transport or storage. Expanded metal sides allow better visibility and airflow. Interior height 36" above deck. Available with and without drop gate panel. 2 swivel, 2 rigid, 6" x 2" mold-on rubber casters.

Size	TRUCK ONLY Model No.	Wt.	REMOVABLE DROP-GATE PANEL	Wt.	TRUCK WITH REMOVABLE DROP-GATE PANEL	Wt.
24 x 48	CA-2448-6MR	142	CA-RD48-PNL	26	CARD-2448-6MR	168
24 x 60	CA-2460-6MR	162	CA-RD60-PNL	31	CARD-2460-6MR	193
30 x 48	CA-3048-6MR	162	CA-RD48-PNL	26	CARD-3048-6MR	188
30 x 60	CA-3060-6MR	177	CA-RD60-PNL	31	CARD-3060-6MR	208

For 6" x 2" Phenolic Casters, use wheel code: **-6PH** (3600 lbs. Capacity)

For 6" x 2" Polyurethane Casters, use wheel code: **-6PY** (3600 lbs. Capacity)



**Model
CAWD-2448-6PY**

Welded Drop Gate Truck

Ideal for transporting or staging of bulkier materials. All models have a 12 gauge reinforced deck, and 2 swivel, 2 rigid 6" polyurethane casters with a pushbar handle on the swivel caster end. These all-welded units have a powder coated finish and ship fully assembled. Side panels are 13 gauge flattened expanded metal with 1-1/2" angle iron corners and top edge. Front drop-gate with spring latches provide easy access. Interior height - 36" above deck.

Size	Model No.	Wt.
24 x 48	CAWD-2448-6PY	160
24 x 60	CAWD-2460-6PY	185
30 x 48	CAWD-3048-6PY	180
30 x 60	CAWD-3060-6PY	200



3-Sided Bulk Trucks

Ideal for transporting or staging of bulkier materials. All models have a 12 gauge reinforced deck, and 2 swivel, 2 rigid casters with a pushbar handle on swivel caster end. All-welded units have a powder coated finish and ship fully assembled.

MESH SIDES

13 gauge flattened expanded metal with 1-1/2" angle iron corners and top trim. Available in two heights.

Deck Size D x W	Model No.	Wt.	Model No.	Wt.
	8" x 2" Mold-On Rubber 2400 lbs. Cap.		8" x 2" Polyurethane 3600 lbs. Cap.	
36" Interior Height				
24 x 48	CA-2448-8MR	150	CA-2448-8PPY	140
24 x 60	CA-2460-8MR	169	CA-2460-8PPY	159
30 x 48	CA-3048-8MR	170	CA-3048-8PPY	160
30 x 60	CA-3060-8MR	185	CA-3060-8PPY	175
	6" x 2" Mold-On Rubber 2000 lbs. Cap.		6" x 2" Polyurethane 3600 lbs. Cap.	
48" Interior Height				
24 x 48	T1-2448-6MR	147	T1-2448-6PY	139
24 x 60	T1-2460-6MR	163	T1-2460-6PY	155
30 x 48	T1-3048-6MR	165	T1-3048-6PY	157
30 x 60	T1-3060-6MR	182	T1-3060-6PY	174



Mesh Sides

TUBULAR STEEL SIDES

48" interior height, 1.05" O.D. x 14 gauge round steel tubing.

Deck Size D x W	Model No.	Wt.	Model No.	Wt.
	6" x 2" Mold-On Rubber 2000 lbs. Cap.		6" x 2" Polyurethane 3600 lbs. Cap.	
24 x 36	OT-2436-6MR	118	OT-2436-6PPY	108
24 x 48	OT-2448-6MR	136	OT-2448-6PPY	126
24 x 60	OT-2460-6MR	153	OT-2460-6PPY	143
30 x 48	OT-3048-6MR	149	OT-3048-6PPY	139
30 x 60	OT-3060-6MR	167	OT-3060-6PPY	157



Tubular Sides

SLAT-TYPE SIDES

48" interior height, 1-1/2" x 3/16" slats.

Deck Size D x W	Model No.	Wt.	Model No.	Wt.
	6" x 2" Mold-On Rubber 2000 lbs. Cap.		6" x 2" Polyurethane 3600 lbs. Cap.	
24 x 48	S1-2448-6MR	164	S1-2448-6PY	156
24 x 60	S1-2460-6MR	182	S1-2460-6PY	174
30 x 48	S1-3048-6MR	190	S1-3048-6PY	182
30 x 60	S1-3060-6MR	216	S1-3060-6PY	208



Slat-Type Sides

SOLID SIDES

48" interior height, 14 gauge solid steel with 1-1/2" angle iron corners and top edge.

Deck Size D x W	Model No.	Wt.	Model No.	Wt.
	6" x 2" Mold-On Rubber 2000 lbs. Cap.		6" x 2" Polyurethane 3600 lbs. Cap.	
24 x 48	B1-2448-6MR	219	B1-2448-6PY	211
24 x 60	B1-2460-6MR	244	B1-2460-6PY	236
30 x 48	B1-3048-6MR	246	B1-3048-6PY	238
30 x 60	B1-3060-6MR	273	B1-3060-6PY	265



Solid Sides



3-Sided Shelf Trucks

Heavy 12 gauge shelves are enclosed on 3 sides, 48" high above the deck in sturdy 1-1/2" angle iron corners and top trim. Mesh sides and slat-type sides allow visibility and air circulation, while solid sides offer more durability. 2 swivel, 2 rigid 6" x 2" polyurethane casters with 3600 lbs. capacity. Overall height 57".

MESH SIDES - 13 gauge flattened expanded metal

SLAT-TYPE SIDES - 1-1/2" x 3/16" slats

SOLID SIDES - 14 gauge sheet steel



**Model
T3-3060-6PY
3 Shelf with Mesh Sides**

	SIZE W x L	2 SHELVES 22-1/2" Clearance Model No.	Wt.	3 SHELVES 15" Clearance Model No.	Wt.
Mesh Sides	24 x 48	T2-2448-6PY	173	T3-2448-6PY	219
	24 x 60	T2-2460-6PY	198	T3-2460-6PY	250
	30 x 48	T2-3048-6PY	200	T3-3048-6PY	251
	30 x 60	T2-3060-6PY	229	T3-3060-6PY	293
Slat Sides	24 x 48	S2-2448-6PY	198	S3-2448-6PY	234
	24 x 60	S2-2460-6PY	226	S3-2460-6PY	272
	30 x 48	S2-3048-6PY	233	S3-3048-6PY	274
	30 x 60	S2-3060-6PY	267	S3-3060-6PY	319
Solid Sides	24 x 48	B2-2448-6PY	253	B3-2448-6PY	295
	24 x 60	B2-2460-6PY	288	B3-2460-6PY	340
	30 x 48	B2-3048-6PY	290	B3-3048-6PY	342
	30 x 60	B2-3060-6PY	328	B3-3060-6PY	392

For 6" x 2" Mold-on Rubber Casters, use wheel code: **-6MR** (2000 lbs. Capacity)



**Model
T3-2448-6PYFP60**

Forkliftable Order Picking Truck

3600 lbs. Capacity

Large capacity, three shelf truck designed to securely attach to your order picker. Two full width fork pockets on 24" centers and 1-1/2" steel grab bar make attachment easy. Shelves have 19" clearance. Overall height is 69". 2 rigid and 2 swivel 6" polyurethane casters assure smooth rolling, even with a full load of 3600 lbs. 48" length allows the unit to fit down any aisle!

Size W x L	Model No.	Wt.
24 x 48	T3-2448-6PYFP60	258
30 x 48	T3-3048-6PYFP60	295

3-Sided Adjustable Shelf Trucks

Expanded metal on 3 sides extends 48" high above deck to help contain loads and improve visibility and airflow. Upper shelf is adjustable on 3-1/2" centers for versatility, and can be positioned with 1-1/2" lips either up or down. Shelves are 12 gauge steel. 3600 lbs. overall capacity with non-marking, long-lasting 6" x 2" polyurethane casters, 2 swivel, 2 rigid. Overall height is 57". Additional factory installed adjustable shelves are also available.

	DECK SIZE W x L	Model No.	Wt.
Mesh Sides	24 x 48	T2-A-2448-6PY	203
	24 x 60	T2-A-2460-6PY	228
	30 x 48	T2-A-3048-6PY	230
	30 x 60	T2-A-3060-6PY	259
Slat Sides	24 x 48	S2-A-2448-6PY	218
	24 x 60	S2-A-2460-6PY	256
	30 x 48	S2-A-3048-6PY	263
	30 x 60	S2-A-3060-6PY	297
Solid Sides	24 x 48	B2-A-2448-6PY	283
	24 x 60	B2-A-2460-6PY	318
	30 x 48	B2-A-3048-6PY	320
	30 x 60	B2-A-3060-6PY	358

For 6" x 2" Mold-on Rubber Casters, use wheel code: **-6MR**
(2000 lbs. Capacity)



Model
T2-A-3060-6PY

Drop-Shelf Trucks

3-sided truck converts in seconds. Upper shelf drops down and out of the way to make room for extra large items, or it can be removed completely. Sides extend 48" above deck, with drop-shelf positioned 30" above deck. Rolls easily on 6" x 2" non-marking polyurethane casters, 2 swivel and 2 rigid. 3600 lbs. capacity.

MESH SIDES - 13 gauge flattened expanded metal

SLAT-TYPE SIDES - 1-1/2" x 3/16" slats

SOLID SIDES - 14 gauge solid steel

	DECK SIZE W x L	SHELF SIZE W x L	Model No.	Wt.
Mesh Sides	24 x 48	21 x 44	T1-2448-6PY-DS	181
	24 x 60	21 x 56	T1-2460-6PY-DS	206
	30 x 48	27 x 44	T1-3048-6PY-DS	209
	30 x 60	27 x 56	T1-3060-6PY-DS	237
Slat Sides	24 x 48	21 x 44	S1-2448-6PY-DS	198
	24 x 60	21 x 56	S1-2460-6PY-DS	225
	30 x 48	27 x 44	S1-3048-6PY-DS	234
	30 x 60	27 x 56	S1-3060-6PY-DS	271
Solid Sides	24 x 48	21 x 44	B1-2448-6PY-DS	253
	24 x 60	21 x 56	B1-2460-6PY-DS	287
	30 x 48	27 x 44	B1-3048-6PY-DS	290
	30 x 60	27 x 56	B1-3060-6PY-DS	328

For 6" x 2" Mold-on Rubber Casters, use wheel code: **-6MR**
(2000 lbs. Capacity)



Model
T1-3060-6PY-DS



Release slide bolts to drop upper shelf down and out of the way



Shelf in raised position



Model
DET4-2448-6PY

2-Sided Shelf Trucks

Expanded metal ends improve visibility, allow 2-way access to material. End panels extend 48" high above deck. All-welded construction with 12 gauge steel shelves. Available in 2, 3 or 4 shelf configurations. Non-marking, quiet 6" polyurethane wheels, 2 swivel 2 rigid. Overall height 57". Capacity 3600 lbs.

SHELF SIZE	2 SHELVES 22-1/2" Clearance Model No.	Wt.	3 SHELVES 15" Clearance Model No.	Wt.	4 SHELVES 12" Clearance Model No.	Wt.
24 x 48	DET2-2448-6PY	154	DET3-2448-6PY	196	DET4-2448-6PY	238
24 x 60	DET2-2460-6PY	175	DET3-2460-6PY	217	DET4-2460-6PY	269
30 x 48	DET2-3048-6PY	178	DET3-3048-6PY	229	DET4-3048-6PY	281
30 x 60	DET2-3060-6PY	204	DET3-3060-6PY	268	DET4-3060-6PY	332

For 6" x 2" Mold-on Rubber Casters, use wheel code: **-6MR** (2000 lbs. Capacity)



Model
DET2-A-2448-6PY

2-Sided Adjustable Shelf Truck

Expanded metal ends extend 48" high above the deck, improve visibility, and allow 2-way access to material. All-welded construction with 12 gauge steel shelves. Standard truck has one upper shelf that is adjustable on 3-1/2" centers, and can be positioned with 1-1/2" lips either up or down. Additional adjustable shelves also available. 2 swivel and 2 rigid casters with quiet, non-marking 6" polyurethane wheels. Overall height 57". Capacity 3600 lbs.

Size W x D	Model No.	Wt.	Additional Shelf Model No.	Wt.
24 x 48	DET2-A-2448-6PY	184	SHLF-2447	43
24 x 60	DET2-A-2460-6PY	205	SHLF-2459	53
30 x 48	DET2-A-3048-6PY	208	SHLF-3047	53
30 x 60	DET2-A-3060-6PY	234	SHLF-3059	65

For 6" x 2" Mold-on Rubber Casters, use wheel code: **-6MR** (2000 lbs. Capacity)



Model
PPT-2848-6M

Pick-Pack Truck

with sloped shelves and divider

Upper shelves are sloped, bottom shelf has 1-1/2" retaining lip. 14 gauge shelves have 14" shelf clearance. Diamond caster pattern with 6" x 2" Mold-On rubber casters, 1600 lbs. capacity.

Size	Model No.	Shelf Size	Wt.
28 x 48	PPT-2848-6M	14 x 48	225
28 x 60	PPT-2860-6M	14 x 60	255



High End Truck with Removable Shelf

2000 lbs. Capacity

Narrow 16" wide 12 gauge steel deck is perfect for narrow aisles. Each corner has 5" polyurethane swivel wheels. Two 8" center wheels allow the unit to pivot within its own radius. All wheels are non-marking polyurethane. Two removable handles extend 48" above the deck to contain taller loads. The shelf can be mounted in three different heights (7-1/2", 21-1/2", 35-1/2" from the deck) on the upright cross braces. Shelf capacity 200 lbs.

Size	Model No.	Wt.
16 x 48	HE-1648-RS	127
16 x 60	HE-1660-RS	142



**Model
HE-1660-RS**

High End 6-Wheeled Shelf Truck

Narrow width is ideal for busy aisles and two shelves create twice the loading area! 12 gauge shelves have 24" clearance. Six wheel design is fully maneuverable with two 8" x 2" rigid center wheels and four 5" swivel corner wheels. Non-marking polyurethane tread prevents wheel marks on your floor. End panels extend 48" high for extra capacity and are constructed from 1-1/2" x 3/16" slats for extra visibility. Capacity 2000 lbs.

Size	Model No.	Wt.
16 x 48	HE2-1648	118
16 x 60	HE2-1660	129
16 x 72	HE2-1672	152
24 x 48	HE2-2448	152
24 x 60	HE2-2460	190



**Model
HE2-2460**

Narrow Aisle Order Picking Truck

2000 lbs. Capacity

Six wheel design creates a versatile two shelf truck that is perfect for use in warehouses and distribution centers where you need large capacity and zero turn maneuverability. The large writing shelf, measuring 21" wide and 12" deep, and storage pocket provide the work surface needed to fill out paperwork while picking orders. Constructed from 12 gauge steel and 1-1/2" angle, this workhorse is built to withstand the rigors of the most demanding facilities. The bottom shelf has 24" clearance and the end panels extend 48" above the deck. 8" rigid and 5" swivel non-marking polyurethane casters provide a smooth ride.

Size	Model No.	Wt.
24 x 48	HE2-2448-WSP	172
24 x 60	HE2-2460-WSP	210



**Model
HE2-2460-WSP**



3-Sided Model
RP3S-2436-5PY



4-Sided Model
RP4X-1832-5PY

Raised Platform Box Trucks

Raised 12 gauge steel platform is 20" high to help minimize bending. Sides extend 20" high above the deck to help contain those big loads and small parts. All-welded construction ships fully assembled and ready for immediate use. 2 swivel, 2 rigid casters with non-marking polyurethane wheels.

1200 lbs. Capacity – 5" ball bearing wheels

2000 lbs. Capacity – 6" roller bearing wheels

SOLID SIDES

14 gauge steel sides.

Platform Size	Capacity	3-SIDED MODEL		4-SIDED MODEL	
		Model	Wt.	Model	Wt.
18 x 32	1200 lbs.	RP3S-1832-5PY	94	RP4S-1832-5PY	109
24 x 36	1200 lbs.	RP3S-2436-5PY	114	RP4S-2436-5PY	133
24 x 48	1200 lbs.	RP3S-2448-5PY	134	RP4S-2448-5PY	154
24 x 36	2000 lbs.	RP3S-2436-6PY	124	RP4S-2436-6PY	143
24 x 48	2000 lbs.	RP3S-2448-6PY	134	RP4S-2448-6PY	154
30 x 48	2000 lbs.	RP3S-3048-6PY	175	RP4S-3048-6PY	195
30 x 60	2000 lbs.	RP3S-3060-6PY	198	RP4S-3060-6PY	224

EXPANDED METAL SIDES

3/4" expanded metal sides for greater visibility and airflow.

Platform Size	Capacity	3-SIDED MODEL		4-SIDED MODEL	
		Model	Wt.	Model	Wt.
18 x 32	1200 lbs.	RP3X-1832-5PY	73	RP4X-1832-5PY	78
24 x 36	1200 lbs.	RP3X-2436-5PY	93	RP4X-2436-5PY	100
24 x 48	1200 lbs.	RP3X-2448-5PY	120	RP4X-2448-5PY	128
24 x 36	2000 lbs.	RP3X-2436-6PY	102	RP4X-2436-6PY	110
24 x 48	2000 lbs.	RP3X-2448-6PY	124	RP4X-2448-6PY	132
30 x 48	2000 lbs.	RP3X-3048-6PY	156	RP4X-3048-6PY	165

Raised Platform Trucks with Drop-Gate

Hinged Drop-Gate provides easier access when loading and unloading. Spring latches secure gate in upright position to retain load. Raised 12 gauge platform is 20" high to minimize bending, and sides extend 20" above platform. 2000 lbs. capacity with 6" x 2" polyurethane casters, 2 swivel and 2 rigid.

SOLID SIDES

14 gauge steel sides.

Platform Size	Model No.	Wt.
24 x 36	RPDS-2436-6PY	143
24 x 48	RPDS-2448-6PY	152
30 x 48	RPDS-3048-6PY	195

EXPANDED METAL SIDES

3/4" expanded metal for greater visibility and airflow.

Platform Size	Model No.	Wt.
24 x 36	RPDX-2436-6PY	110
24 x 48	RPDX-2448-6PY	124
30 x 48	RPDX-3048-6PY	156



Model
RPDS-2436-6PY



Model
RPDX-2436-6PY



Box Trucks

2000 lbs. Capacity

Bulk storage and transport trucks have 24" interior height. Overall height is 32" with 6" x 2" mold-on rubber casters, 2 swivel and 2 rigid.

SHEET STEEL TRUCKS

14 gauge steel sides in angle iron frame.

Deck Size	Model No.	Wt.
24 x 36	BTS2436-6MR	149
24 x 48	BTS2448-6MR	175
30 x 48	BTS3048-6MR	192
30 x 60	BTS3060-6MR	217



Model
BTS2436-6MR



Model
BTX2436-6MR

EXPANDED METAL TRUCKS

Angle iron frame with 3/4" expanded metal sides for greater visibility and airflow.

Deck Size	Model No.	Wt.
24 x 36	BTX2436-6MR	101
24 x 48	BTX2448-6MR	117
30 x 48	BTX3048-6MR	130
30 x 60	BTX3060-6MR	145

Box Trucks with Hinged Lid

2000 lbs. Capacity

Bulk storage and transport trucks have 24" interior height. Double-hinged top cover has padlock hasp for security. Overall height is 33-1/2" with 6" x 2" mold-on rubber casters, 2 swivel and 2 rigid. 2000 lbs. capacity.

SHEET STEEL TRUCKS

14 gauge steel sides in angle iron frame provides maximum durability.

Deck Size	Model No.	Wt.
24 x 36	BTSL2436-6MR	173
24 x 48	BTSL2448-6MR	206
30 x 48	BTSL3048-6MR	230
30 x 60	BTSL3060-6MR	264



Model
BTSL2436-6MR



Model
BTXL2436-6MR

EXPANDED METAL TRUCKS

Angle iron frame with 3/4" expanded metal sides for greater visibility and airflow.

Deck Size	Model No.	Wt.
24 x 36	BTXL2436-6MR	117
24 x 48	BTXL2448-6MR	139
30 x 48	BTXL3048-6MR	155
30 x 60	BTXL3060-6MR	174



Model
HT-4857-6PH

Low-Profile Hopper Truck - 12" Deep

2000 lbs. Capacity

All-welded construction. Angled "scoop" side allows for use under machinery. Designed to catch chips, cutoff, and scraps produced by metalworking. Two swivel, two rigid casters with 6" x 2" phenolic wheels allow for smoother rolling of heavy loads. Hopper height is 20". Removable handle is 40" high. Powder coated finish.

Overall W x D x H*	Model No.	Wt.
48 x 59 x 20	HT-4857-6PH	206

* Includes handle pockets, but does not include handle dimensions.



Model
HT-3651-6PH

Low-Profile Hopper Truck - 16" Deep

2000 lbs. Capacity

All-welded construction. Angled "scoop" side allows for use under machinery. Designed to catch chips, cutoff, and scraps produced by metalworking. Hopper height is 24". Removable handle is 40" high, and can be placed on either of the three sides. Four swivel casters with 6" x 2" phenolic wheels for maneuverability under equipment overhangs/under machinery. Powder coated finish.

Overall W x D x H*	Model No.	Wt.
54 x 38 x 24	HT-3651-6PH	183

* Includes handle pockets, but does not include handle dimensions.



Model
HT-2751-6PY

Hopper Truck

14 gauge, fully welded, leakproof construction. 3/4 cubic yard capacity. 2 rigid and 2 swivel casters with 6" polyurethane wheels provide a smooth rolling truck even when fully loaded. Top edge is reinforced with 1" angle for extra durability. 3/16" thick dumping knees offer two step dumping action. Two 1" diameter handles won't cut into your operators' hands when lifting. Heavy-duty gray powder coated finish.

Overall W x D x H	Model No.	Wt.
27 x 56-3/4 x 40-5/8	HT-2751-6PY	149

Wire Reel Caddy

All-welded Wire Reel Caddy has four 16" wide rods for holding multiple wire reel configurations. Top 3 rods are 7" on-center. Wheels are off the ground while standing so it does not "walk" while pulling wire. Full width handle. Convenient tool tray for storage and transport of hand-tools. Heavy-duty angle iron frame. Wheels are 8" x 2-1/2" solid rubber with ball bearings. Durable powder coated gray finish. Ships via UPS!

Overall W x D x H	Model No.	Wt.
8-1/2" x 18-1/2" x 45-1/2"	RT4-8S	54



**Model
RT4-8S**

ELECTRICIAN'S Wire Reel Cart

All-welded Electrician's Cart carries everything you need for a wiring project. Supplied with five 36" long spool holder rods for numerous wire reel configurations. Heavy 12 gauge steel shelves have a 1-1/2" lip to retain small parts. Top shelf 24" wide x 36" long x 35" high. Bottom shelf measures 24" wide x 48", providing a 12" extension for upright storage and transport of conduit or other long material. Hanger bar on side of cart for convenient ladder storage. Casters are 5" polyurethane, 2 swivel with total-lock wheel brakes and 2 rigid. Overall length is 54". Durable powder coated gray finish. Ships assembled.

Model No.	Wt.
RC2448-5PYTL	139



**Model
RC2448-5PYTL**

Wire Reel Cart with Drawers

Includes two locking storage drawers and 3 spool holder rods 36" long. Drawers have cylinder locks with 2 keys, and each measure 13" wide x 17" long x 4-1/2" high inside.

Model No.	Wt.
RC2448-5PYTL2DR	175



**Model
RC2448-5PYTL2DR**

Wire Reel Cart with Cabinet

All-welded Electrician's Cart carries everything you need for a wiring project. Supplied with five 15" long spool holder rods to allow numerous wire reel configurations. Heavy 12 gauge steel shelves have a 1-1/2" lip to retain small parts. Top shelf is 24"W x 36"L x 35"H. Storage cabinet with locking door and keyed handle measures 16"W x 23"D x 25"H. Bottom shelf measures 24"W with a 12" extension for upright storage and transport of conduit or other long material. Hanger bar on side of cart for convenient ladder storage. Casters are 5" polyurethane, 2 swivel and 2 rigid. Swivel casters feature total lock wheel brake, that locks both the swivel and the wheel. Overall length is 54". Durable powder coated gray finish.

Model No.	Wt.
RCM2448-5PYTL	152



**Model
RCM2448-5PYTL**



*Double Sided
with Pegboard,
Shelves, and Tray*



*Single Sided
with Trays
and Shelf*

Adjustable Tray A-Frame Shelf Trucks

2000 lbs. Capacity

Use in your Lean Manufacturing facility to transport and store components or finished products where and when you need them. Slotted steel uprights accept flush shelves, 9" or 15" deep trays, and pegboard panels making this a versatile ergonomic product. Mix and match to fit your exact requirements. Since it is adjustable you can reconfigure the truck as your needs change. Available as a single sided or double sided unit. All-welded construction with a durable powder coat finish and 2 rigid and 2 swivel 6" phenolic wheels.

A-Frame	W x D x H	Model No.	Wt.
Single-sided	40 x 24 x 67	AFS-2440-6PH	72
Double-sided	40 x 36 x 67	AFS-3640-6PH	92

9" DEEP TRAYS are 3" high on 3 sides. Open front side available with a 1" lip, or flush edge.

15" DEEP TRAYS are 6" high on 3 sides with handles on both ends. Open front side available with 1" lip, or a flush edge.

FLUSH SHELVES have a 1-1/2" lip along the back, flush edge on 3 sides. Ideal for long and oversize items.

PEGBOARD PANELS are 16 gauge formed steel with holes on 1" centers to accept most common light and heavy-duty hooks. (Pegs and bins not included.)

Tray Model No.	W x D x H	Front Edge	Shelf max per frame		Wt.
			1-sided	2-sided	
AF-SHELF-9	36 x 9 x 3	flush	8	16	25
AF-SHELF-9-LU	36 x 9 x 3	1" lip	8	16	25
AF-SHELF-15	36 x 15 x 6	flush	5	10	33
AF-SHELF-15-LU	36 x 15 x 6	1" lip	5	10	33
AF-SHELF-FLUSH	36 x 15 x flush	flush	16	32	20
AF-PB	36 x 1 x 24	NA	2	4	17

Mobile Pegboard A Frame - Lean Tool Cart

1200 lbs. Capacity

Use in your Lean Manufacturing facility to transport and efficiently organize tools and equipment. Visually locate tools and items in seconds. Use tool shadowing on the pegboards to know immediately if a tool, accessory, or part is missing. The 16 gauge pegboard has holes on 1" centers and accepts most common light and heavy-duty hooks. Pegboards are 48" high. Overall height is 56". This all-welded, heavy-duty, durable unit features a durable powder coated gray finish. Ships fully assembled. 2 rigid and 2 swivel 5" polyurethane wheels make it easy to safely transport your tools to the work area. (Pegs and bins not included.)



*Model
AFPB-2436-5PY*

Size	Model No.	Wt.
24 x 36	AFPB-2436-5PY	124
24 x 48	AFPB-2448-5PY	157
24 x 60	AFPB-2460-5PY	190

Mobile Workstation

1200 lbs. Capacity

Top shelf is 34" high with a 1-1/2" retaining lip on 3 sides. Bottom and middle shelves lip up on all 4 sides. 12 gauge shelves. Powder coated finish. 5" polyurethane casters, 2 rigid and 2 total lock swivel casters.

	2-SHELF 24-1/2" Clearance		3-SHELF 11-1/2' Clearance	
Size	Model No.	Wt.	Model No.	Wt.
24 x 36	MW-2436-5TL	84	3MW-2436-5TL	115
24 x 48	MW-2448-5TL	103	3MW-2448-5TL	150

PEGBOARD - Available with a bolt-on 16 gauge pegboard panel. Holes are 1" on center and accept most common light and heavy-duty hooks. Pegboard panel is 24"H. Gray powder coated finish. (Pegs and bins not included.)

	2-SHELF 24-1/2" Clearance		3-SHELF 11-1/2' Clearance	
Size	Model No.	Wt.	Model No.	Wt.
24 x 36	MW-2436-5TL-PB	102	3MW-2436-5TL-PB	122
24 x 48	MW-2448-5TL-PB	127	3MW-2448-5TL-PB	162



Model
3MW-2436-5TL-PB



Model
MW-2436-5TL

Mobile Workstation with Storage Drawer

Available with 1 or 2 locking drawers (keyed alike). Drawers measure 13"W x 17"D x 4-1/2"H. Shelf clearance is 18" below drawer. Non-marking 5" polyurethane casters, 2 rigid and 2 total lock swivels that lock both wheel and swivel at the same time. Gray powder coated finish.

Shelf Size	1-DRAWER Model No.	Wt.	2-DRAWER Model No.	Wt.
24 x 36	MW-2436-5TL-DR	97	MW-2436-5TL-2DR	114
24 x 48	MW-2448-5TL-DR	116	MW-2448-5TL-2DR	129
with Pegboard Panel				
24 x 36	MW2436-5TL-DRPB	115	MW2436-5TL2DRPB	128
24 x 48	MW2448-5TL-DRPB	140	MW2448-5TL2DRPB	153



Model
MW-2436-5TL-2DR

Work Height Mobile Workstation with writing shelf, drawers, and pegboard

12 gauge top shelf is 42 in high making this a perfect standing workstation. 16 gauge steel pegboard extends 24" above workbench. Pegboard holes are on 1" centers and accept most common light and heavy duty hooks. 2 locking storage drawers keep items secure and out of view. Writing shelf measures 14" wide x 12-1/2" deep and has a sloped storage pocket underneath. 2 swivel + 2 rigid total lock casters with 5" polyurethane wheels make it easy to transport the unit to your work area. Total lock casters keep the unit located when in use. (Bins and Hooks not included).

Size D x W	Model No.	Wt.
24 x 36	QC2436-TL2DRPB	163
24 x 48	QC2448-TL2DRPB	187
24 x 60	QC2460-TL2DRPB	212



Model
QC2448-TL2DRPB



Model
MB3-2448-FL



Model
MJ-2D-2448-FL



Model
MH-2D-2448-HDFL



Model
MM2D-2448-2DRFL

48" Wide Mobile Bench Cabinets

3600 lbs. Capacity

All-welded 12 gauge construction. The top work surface measures 24" x 48", is 41" high and is surrounded by retaining lip on three sides (except Butcher Block). Available in 4 standard work top surfaces. Non marking 6" Polyurethane casters, 2 rigid and 2 swivel, provide smooth rolling performance. Floor lock on the handle end securely positions the workbench.

Top Surface	Without Center Shelf		With Center Shelf	
	Model No.	Wt.	Model No.	Wt.
Powder Coated Steel	MB-2448-FL	184	MB3-2448-FL	214
1-3/4" Butcher Block	MJ-2448-FL	234	MJ3-2448-FL	264
1/4" Hardboard	MH-2448-FL	192	MH3-2448-FL	222
Non-Slip Vinyl	MM-2448-FL	188	MM3-2448-FL	218

WITH LOCKING DOORS

3600 lbs. Capacity

Secure 3 point latching system with keyed handle locks the doors at top, center and bottom. Available with and without center shelf.

Top Surface	Without Center Shelf		With Center Shelf	
	Model No.	Wt.	Model No.	Wt.
Powder Coated Steel	MB-2D-2448-FL	223	MB3-2D-2448-FL	253
1-3/4" Butcher Block	MJ-2D-2448-FL	273	MJ3-2D-2448-FL	303
1/4" Hardboard	MH-2D-2448-FL	231	MH3-2D-2448-FL	261
Non-Slip Vinyl	MM-2D-2448-FL	227	MM3-2D-2448-FL	257

WITH HEAVY-DUTY DRAWER

3600 lbs. Capacity

Large heavy-duty drawer measures 26"W x 20"D x 6"H and features a full width recessed handle and padlock hasp. Available with and without locking doors.

Top Surface	Without Locking Doors		With Locking Doors	
	Model No.	Wt.	Model No.	Wt.
Powder Coated Steel	MB-2448-HDFL	228	MB-2D-2448-HDFL	262
1-3/4" Butcher Block	MJ-2448-HDFL	273	MJ-2D-2448-HDFL	312
1/4" Hardboard	MH-2448-HDFL	231	MH-2D-2448-HDFL	270
Non-Slip Vinyl	MM-2448-HDFL	227	MM-2D-2448-HDFL	267

WITH DOUBLE STORAGE DRAWERS

3600 lbs. Capacity

2 Locking storage drawers measuring 13"W x 17"D x 4-1/2"H. Available with and without locking doors.

Top Surface	Without Locking Doors		With Locking Doors	
	Model No.	Wt.	Model No.	Wt.
Powder Coated Steel	MB-2448-2DRFL	207	MB2D-2448-2DRFL	246
1-3/4" Butcher Block	MJ-2448-2DRFL	257	MJ2D-2448-2DRFL	296
1/4" Hardboard	MH-2448-2DRFL	215	MH2D-2448-2DRFL	254
Non-Slip Vinyl	MM-2448-2DRFL	211	MM2D-2448-2DRFL	250

VISIBLE CONTENT

48" Wide Mobile Bench Cabinets

3600 lbs. Capacity

All-welded 12 gauge construction. Clearview doors secure contents with keyed handle and 3 point latching mechanism. The top work surface measures 24" x 48", is 41" high and is surrounded by retaining lip on three sides (except Butcher Block Top models). Available in 4 standard work top surfaces. Non marking 6" x 2" polyurethane casters, 2 rigid and 2 swivel, provide smooth rolling performance. Floor lock on the handle end securely positions the workbench. Durable powder coated gray finish.

WITH FULL CENTER SHELF

Interior shelf clearance 13" high.

Top Surface	Model No.	Wt.
Powder Coated Steel	MBP3-2D-2448-FL	240
1-3/4" Butcher Block	MJP3-2D-2448-FL	290
1/4" Hardboard	MHP3-2D-2448-FL	248
Non-Slip Vinyl	MMP3-2D-2448-FL	244



**Model
MHP3-2D-2448-FL**



**Model
MBP2D-2448-FL**

WITHOUT CENTER SHELF

Cabinet interior height clearance 28".

Top Surface	Model No.	Wt.
Powder Coated Steel	MBP2D-2448-FL	210
1-3/4" Butcher Block	MJP2D-2448-FL	260
1/4" Hardboard	MHP2D-2448-FL	218
Non-Slip Vinyl	MMP2D-2448-FL	214

WITH HEAVY-DUTY DRAWER

Large 250 lb. capacity storage drawer measures 26"W x 20"D x 6"H and features a full-width recessed handle and a padlock hasp. Cabinet interior clearance 20" high.

Top Surface	Model No.	Wt.
Powder Coated Steel	MBP2D-2448-HDFL	249
1-3/4" Butcher Block	MJP2D-2448-HDFL	299
1/4" Hardboard	MHP2D-2448-HDFL	257
Non-Slip Vinyl	MMP2D-2448-HDFL	254



**Model
MJP2D-2448-HDFL**

WITH DOUBLE STORAGE DRAWERS

2 storage drawers measuring 12" W x 17"D x 4-1/2"H with cylinder locks and keys. Cabinet interior clearance 21-1/2" high.

Top Surface	Model No.	Wt.
Powder Coated Steel	MBP2D2448-2DRFL	233
1-3/4" Butcher Block	MJP2D2448-2DRFL	283
1/4" Hardboard	MHP2D2448-2DRFL	241
Non-Slip Vinyl	MMP2D2448-2DRFL	237



**Model
MMP2D2448-2DRFL**



Model
MC3-2436TL



36" Wide Mobile Bench Cabinets

1200 lbs. Capacity

12 gauge shelves 36"W x 24"D and are enclosed on three sides, with a flush front edge. Center & bottom shelves have 1-1/2" lip front edge. 36" top shelf height, 38" overall height. Non-marking 5" Polyurethane casters, 2 rigid and 2 swivel with total lock brakes. Available in 4 standard work tops.

Top Surface	Without Center Shelf		With Center Shelf	
	Model No.	Wt.	Model No.	Wt.
Powder Coated Steel	MC-2436TL	140	MC3-2436TL	170
1-3/4" Butcher Block	MCJ-2436TL	178	MCJ3-2436TL	208
1/4" Hardboard	MCH-2436TL	146	MCH3-2436TL	176
Non-Slip Vinyl	MCM-2436TL	143	MCM3-2436TL	173

Mobile Cabinet with 2 or 4 Drawers

Locking storage drawers under top shelf measuring 13"W x 17"D x 4-1/2"H are keyed alike.

Top Surface	2 Drawers		4 Drawers	
	Model No.	Wt.	Model No.	Wt.
Powder Coated Steel	MC-2436-2DRTL	167	MC-2436-4DRTL	190
1-3/4" Butcher Block	MCJ-2436-2DRTL	205	MCJ-2436-4DRTL	228
1/4" Hardboard	MCH-2436-2DRTL	173	MCH-2436-4DRTL	196
Non-Slip Vinyl	MCM-2436-2DRTL	170	MCM-2436-4DRTL	193



Model
MC-2436-2DRTL



Model
MC-2436-4DRTL

Mobile Bench Cabinet with Heavy-Duty Drawer

1200 lbs. Capacity

Large heavy-duty drawer measures 26"W x 20"D x 6"H and features a full width recessed handle and padlock hasp.

Top Surface	Model No.	Wt.
Powder Coated Steel	MC-2436-HDRTL	179
1-3/4" Butcher Block	MCJ-2436-HDRTL	217
1/4" Hardboard	MCH-2436-HDRTL	185
Non-Slip Vinyl	MCM-2436-HDRTL	182



Model
MC-2436-HDRTL

Mobile Bench Cabinet with Drawers and Door

Available in 1, 2, or 4 locking storage drawers that measure 13"W x 17"L x 4-1/2"H. Locking door with 27"H storage area. 12 gauge shelves are 36"W x 24"D and are enclosed on 3 sides with 14 gauge steel.

Top Surface	1 Drawer		2 Drawers		4 Drawers	
	Model No.	Wt.	Model No.	Wt.	Model No.	Wt.
Powder Coated Steel	MC1D2436-1DRTL	186	MC1D2436-2DRTL	198	MC1D2436-4DRTL	221
1-3/4" Butcher Block	MCJ1D2436-1DRTL	224	MCJ1D2436-2DRTL	236	MCJ1D2436-4DRTL	259
1/4" Hardboard	MCH1D2436-1DRTL	192	MCH1D2436-2DRTL	204	MCH1D2436-4DRTL	227
Non-Slip Vinyl	MCM1D2436-1DRTL	189	MCM1D2436-2DRTL	201	MCM1D2436-4DRTL	224



Model
MC1D2436-4DRTL

36" Wide Mobile Bench Cabinet with Locking Storage Drawers

1200 lbs. Capacity

12 gauge shelves 36"W x 24"D and are enclosed on three sides, with a flush front edge. Bottom shelf has 1-1/2" lip front edge. 36" top shelf height, 38" overall height. Locking storage drawers measuring 13"W x 17"D x 4-1/2"H are keyed alike. Non-marking 5" Polyurethane casters, 2 rigid and 2 swivel with total lock brakes.

Top Surface	2 Drawers		4 Drawers	
	Model No.	Wt.	Model No.	Wt.
Powder Coated Steel	MC2D2436-2DRTL	194	MC2D2436-4DRTL	217
1-3/4" Butcher Block	MCJ2D2436-2DRTL	232	MCJ2D2436-4DRTL	255
1/4" Hardboard	MCH2D2436-2DRTL	200	MCH2D2436-4DRTL	223
Non-Slip Vinyl	MCM2D2436-2DRTL	197	MCM2D2436-4DRTL	220



**Model
MCM2D2436-2DRTL**

Mobile Bench Cabinet with Doors and Heavy-Duty Drawer

1200 lbs. Capacity

Large heavy-duty drawer measures 26"W x 20"D x 6"H and features a full width recessed handle and padlock hasp. Protected by 2 doors with 3 point locking latch.

Top Surface	With Locking Doors	
	Model No.	Wt.
Powder Coated Steel	MC2D-2436-HDTL	206
1-3/4" Butcher Block	MCJ2D-2436-HDTL	244
1/4" Hardboard	MCH2D-2436-HDTL	212
Non-Slip Vinyl	MCM2D-2436-HDTL	209



**Model
MCJ2D-2436-HDTL**

Mobile Bench Cabinet with Locking Doors


1200 lbs. Capacity

Locking double doors safeguard your valuables. Secure 3 point latching system with keyed handle anchors the doors at top, center and bottom. Doors open a full 180 degrees to allow full access. Available with and without center shelf.

Top Surface	Without Center Shelf		With Center Shelf	
	Model No.	Wt.	Model No.	Wt.
Powder Coated Steel	MC-2D-2436-TL	167	MC3-2D-2436-TL	199
1-3/4" Butcher Block	MCJ-2D-2436-TL	205	MCJ3-2D-2436-TL	237
1/4" Hardboard	MCH-2D-2436-TL	173	MCH3-2D-2436-TL	205
Non-Slip Vinyl	MCM-2D-2436-TL	170	MCM3-2D-2436-TL	202



**Model
MCH-2D-2436-TL**



Model
IP-2448-2BRK



Available with
Total Lock Casters
add: -TL



Model
IP-2448RM-BRK

Mobile Tables

1000 lbs. Capacity

All-welded steel construction means years of rugged service and no assembly. Single shelf model with open style cross-arm base serves as a workbench where seating is required. Two shelf models provides for additional storage or transport capacity. All models are 34" high and feature 4 swivel casters for increased mobility, and 5" non-marking polyurethane wheels with ball bearings. Wheel brakes are standard on single shelf models, optional on others.

Size	Two Shelf		Single Shelf	
	Model No.	Wt.	Model No.	Wt.
18 x 32	IP-1832-2	67	IP-1832RM-BRK	59
24 x 36	IP-2436-2	87	IP-2436RM-BRK	65
24 x 48	IP-2448-2	107	IP-2448RM-BRK	77
24 x 60	IP-2460-2	127	IP-2460RM-BRK	94
30 x 48	IP-3048-2	125	IP-3048RM-BRK	92
30 x 60	IP-3060-2	151	IP-3060RM-BRK	104
30 x 72	IP-3072-2	177	IP-3072RM-BRK	118

For wheel brakes, add: -BRK



Model
IPG2448-8PHFLPL

Heavy-Duty Mobile Table

5000 lbs. Capacity

Formed 12 gauge shelves with extra reinforcement are welded to 2" x 2" corner angles. Heavy service casters have large top plate and swivel race. Four swivel casters provide maximum maneuverability. 4-position swivel locks on one end will convert swivel casters into rigid. Floor lock on other end prevents unwanted movement when necessary. Overall height 36". Powder coated finish.

Overall W x D	Model No.	Wt.
24 x 36	IPG2436-8PHFLPL	160
24 x 48	IPG2448-8PHFLPL	175
24 x 60	IPG2460-8PHFLPL	185
30 x 48	IPG3048-8PHFLPL	193
30 x 60	IPG3060-8PHFLPL	219
30 x 72	IPG3072-8PHFLPL	259
36 x 72	IPG3672-8PHFLPL	280



Model
IPH-3060-8PHBK

Extra-Heavy-Duty 7 Gauge Mobile Table

5000 lbs. Capacity

Top is formed from 3/16" steel and reinforced with 2" angle iron to withstand the most punishing applications. 2" angle corner posts and additional side braces increase stability. Heavy service casters have larger swivel raceway to handle extra capacity. Maneuvers on 4 swivel casters with 8" x 2" phenolic wheels and wheel brakes. Overall height 34".

W x L	Model No.	Wt.
30 x 48	IPH-3048-8PHBK	211
30 x 60	IPH-3060-8PHBK	237
36 x 60	IPH-3660-8PHBK	261
36 x 72	IPH-3672-8PHBK	290



Welded Steel Workbenches with Back and End Stops

12 gauge steel top workbench with angle iron reinforcements give these workbenches capacity to 5000 lbs. 1-1/2" raised edge on back and each side to keep parts and components contained. Fully welded and shipped set up, ready for use. Footpads have mounting holes ready for anchoring to your floor. Durable gray powder coat finish.

SIZE D x W	Cap.	FIXED HEIGHT 36" Overall Height		ADJUSTABLE HEIGHT 27"-41" High in 2" Increments	
		Model No.	Wt.	Model No.	Wt.
24 x 48	5000	WSL2-2448-36	114	WSL2-2448-AH	116
24 x 60	4500	WSL2-2460-36	146	WSL2-2460-AH	148
30 x 48	5000	WSL2-3048-36	134	WSL2-3048-AH	136
30 x 60	4500	WSL2-3060-36	164	WSL2-3060-AH	166
30 x 72	4000	WSL2-3072-36	198	WSL2-3072-AH	200
36 x 60	4500	WSL2-3660-36	187	WSL2-3660-AH	189
36 x 72	4000	WSL2-3672-36	215	WSL2-3672-AH	217
36 x 84	3000	WSL2-3684-36	239	WSL2-3684-AH	240



Model
WSL2-2448-36

Welded Workbenches with Backstops

3000 lbs. Capacity UDL

Formed 12 gauge steel tops are double reinforced and have a 3" high backstop. Half-depth lower shelf is 12 gauge with a 3" lip at rear. Ship fully assembled. Durable powder coated finish.

STATIONARY MODELS - 3000 lbs. Capacity

Adjustable from 27" to 41" high in 2" increments. Fixed Heights are 36" high with angle iron legs and have footpads with 9/16" lag hole.

Size D x W	ADJUSTABLE HEIGHT		FIXED HEIGHT	
	Model No.	Wt.	Model No.	Wt.
28 x 48	WA-2848	119	WB-2848	106
28 x 60	WA-2860	138	WB-2860	126
28 x 72	WA-2872	158	WB-2872	155

MOBILE MODELS - 1200 lbs. Capacity

5" swivel polyurethane casters with total locks. 36" high with angle iron legs.

Size D x W	Model No.	Wt.
28 x 48	WM-2848	138
28 x 60	WM-2860	157
28 x 72	WM-2872	176

STACKABLE DRAWER (Order Separately)

Ships with mounting hardware for customer installation on series WA, WB, and WM Workbenches above. Includes cylinder lock and 2 keys.

Size D x W x H	Model No.	Wt.
13"W x 17"D x 4-1/2"H Inside	DR-KIT	21

Factory Installed Options (add code to Workbench Model)

- **E End Stops:** 1-1/2" high formed 12 gauge.
- **P Power Strip:** UL listed 15 amp Power Tap with 6 grounded outlets, circuit breaker, switch, 15 ft. power cord and built-in cord wrap.
- **PB Pegboard:** 24" high 16 gauge pegboard panel.
- **R Riser Shelf:** 12" high x 10" deep.



Model
WA-2848-P


Shown with DR-KIT and
factory installed Power Strip



Model
WM-2848-E-P-PB



Model
DR-KIT



Model
PSR-2224-LLDR



Model
PSR-2224-3RBKDR

Shop Desk

All-welded construction with comfortable height as a standing desk/workstation. Riser shelf is 10" deep and 10" above desk surface. Locking storage drawer is 13"W x 17"D x 4-1/2"H and comes with two keys. Lower shelves have 1-1/2" retaining lips and 11-3/4" shelf clearance. Durable powder coated finish.

Stationary Models: Leg levelers allow height adjustment of desk surface from 39" - 42" high. 2000 lbs. capacity.

Mobile Models: 3" swivel brake casters with rubber wheels, 42" high desk surface. 1000 lbs. capacity.

Overall D x W	Stationary Model No.	Wt.	Mobile Model No.	Wt.
22 x 24	PSR-2224-LLDR	99	PSR-2224-3RBKDR	104
24 x 36	PSR-2436-LLDR	134	PSR-2436-3RBKDR	139



Model
PSX-2224-3RBKDR



Model
PSX-2224-LLDR

Enclosed Shop Desk

Enclosed cabinet with 13 gauge expanded metal provides visibility of the contents. All welded construction ensures items stay secure. All models include locking storage drawer. Riser shelf is 10" deep and 10" above writing surface.

Stationary Models: Leg levelers allow height adjustment of desk surface from 39" to 42" high.

Mobile Models: 3" swivel brake casters with rubber wheels, 42" high desk surface.

Overall D x W	Stationary Model No.	Wt.	Mobile Model No.	Wt.
22 x 24	PSX-2224-LLDR	136	PSX-2224-3RBKDR	141
24 x 36	PSX-2436-LLDR	171	PSX-2436-3RBKDR	176

STATIONARY Shop Cabinets

Top, center and bottom shelves are 12 gauge steel, with 14 gauge sides and back. Top shelf has a 2" retaining lip around 3 sides. Doors have chrome locking handle furnished with 2 keys. Leg levelers allow adjustment on uneven floors, as well as 3" of overall height adjustment. Height to top shelf is adjustable from 31"-34". Clearance between shelves is 12-1/2". Welded units ship set up and ready for use.



Model
MC3-2D-2436-LL

Size D x W	Model No.	Doors	Wt.
18 x 18	MC3-1D-1818-LL	1	98
24 x 24	MC3-2D-2424-LL	2	141
24 x 36	MC3-2D-2436-LL	2	187



Counter Height Bench Cabinets

The top work surface measures 24" x 48", is 41" high and is surrounded by retaining lip on three sides (except Butcher Block Top models). Available in 3 standard work top surfaces. Keyed handle and 3 point latching mechanism. Fixed center shelf. Clearview doors provide ventilation and visibility. Heavy duty leg levelers adjust for up to 3" of additional height. All-welded 12 gauge construction. Durable powder coated gray finish.

Top Surface	Solid Doors		Clearview Doors	
	Model No.	Wt.	Model No.	Wt.
Powder Coated Steel	MB3-LL-2D-2448	305	MBP3-LL-2D-2448	294
1-3/4" Butcher Block	MJ3-LL-2D-2448	355	MJP3-LL-2D-2448	344
1/4" Hardboard	MH3-LL-2D-2448	313	MHP3-LL-2D-2448	302



**Model
MJ3-LL-2D-2448**



**Model
MHP3-LL-2D-2448**

Receiving Station

2000 lbs. Capacity

All-welded 12 gauge construction. Top surface measuring 24" deep x 36" wide, is enclosed on three sides with flush front edge to provide an open writing surface. The height can be set from 39-1/2" - 42-1/2" above the floor. The 3 shelf version has 13" of clearance between the three shelves and the 2 shelf station has 27" of clearance. Riser measures 10" deep and is 12" above the writing surface allowing storage of most 3 ring binders. Floor glides adjust to almost any uneven floor surface.

Overall D x W		Model No.	Wt.
24 x 36	Without Center Shelf	RS-2436-LL	159
24 x 36	With Center Shelf	RS3-2436-LL	192



**Model
RS3-2436-LL**

Receiving Station - with Locking Doors


2000 lbs. Capacity

Receiving Station with all-welded 12 gauge construction and two locking doors, (with 3 point latching system and keyed locking handle) to keep your items secure. Top surface measuring 24" deep x 36" wide, is enclosed on three sides with flush front edge to provide an open writing surface. The height can be set from 39-1/2" - 42-1/2" above the floor. Available with and without center shelf. Riser measures 10" deep and is 12" above the writing surface allowing storage of most 3 ring binders. Floor glides adjust to almost any uneven floor surface.

Overall D x W		Model No.	Wt.
24 x 36	Without Center Shelf	RS-2D-2436-LL	182
24 x 36	With Center Shelf	RS3-2D-2436-LL	215



**Model
RS-2D-2436-LL**



Model
WW-3672

Heavy-Duty Workbenches

Up to 10,000 lbs. Capacity

Heavy-Duty Welded Workbenches have an extra strong 7 gauge (0.180 inch) reinforced steel top with rounded comfort edges that can support up to 10,000 lbs. UDL. Heavy 2" x 2" angle legs are 1/4"-thick with welded 7 gauge gussets. The stationary models have footpads with a 5/8"-diameter anchor hole. A sturdy 12 gauge lower shelf has a 500 lbs. capacity for added storage. All models are welded and ship set up, ready for immediate use.



Model
WW-3036-ADJ

FIXED-HEIGHT BENCHES – 34" High

ADJUSTABLE-HEIGHT - 28" to 37" high on 1" centers.

SIZE D x W	FIXED HEIGHT Model No.	Wt.	ADJUSTABLE HEIGHT Model No.	Wt.
30 x 36	WW-3036	151	WW-3036-ADJ	176
30 x 48	WW-3048	187	WW-3048-ADJ	212
30 x 60	WW-3060	220	WW-3060-ADJ	245
30 x 72	WW-3072	263	WW-3072-ADJ	288
36 x 60	WW-3660	250	WW-3660-ADJ	275
36 x 72	WW-3672	287	WW-3672-ADJ	312
42 x 84	WW-4284	421	WW-4284-ADJ	446



OPTIONS AVAILABLE

Heavy-Duty Drawer

26"W x 20"D x 6"H (Center Mount) with padlock hasp. **-HD**

Heavy-Duty Riser Shelf

12" high above bench top, 10" deep. **-HR**



Model
WW-3672-6PHFL

MOBILE WORKBENCHES

3600 lbs. and 5000 lbs. Capacity

With Casters & Floor Lock

Move these Heavy-Duty Workbenches easily with two swivel and two rigid phenolic casters. When in the desired position, engage the floor lock between the swivel casters to avoid unwanted movement. 7 gauge reinforced steel top with rounded comfort edges. Heavy 2" x 2" angle legs are 1/4" thick with 7 gauge welded gussets.



Floor lock between swivel casters stops unwanted movement.

Size D x W	6" x 2" PHENOLIC 34" Bench Top Height 3600 lbs. Capacity		8" x 2" PHENOLIC 36" Bench Top Height 5000 lbs. Capacity	
	Model No.	Wt.	Model No.	Wt.
30 x 36	WW-3036-6PHFL	194	WW-3036-8PHFL	201
30 x 48	WW-3048-6PHFL	231	WW-3048-8PHFL	238
30 x 60	WW-3060-6PHFL	263	WW-3060-8PHFL	270
30 x 72	WW-3072-6PHFL	289	WW-3072-8PHFL	296
36 x 60	WW-3660-6PHFL	297	WW-3660-8PHFL	304
36 x 72	WW-3672-6PHFL	334	WW-3672-8PHFL	341
42 x 84	WW-4284-6PHFL	471	WW-4284-8PHFL	478

Heavy-Duty Workbench with 2-Drawers

10,000 lb. Capacity

Heavy-duty 7 gauge top is formed on all four sides with a "comfort edge" radius. Angle iron legs are 2" x 2" x 1/4" and have footpads with 5/8" diameter anchor holes. Legs have 7 gauge gussets for added stability. Two extra-large drawers provide plenty of extra storage capacity. Each drawer measures 26"W x 20"D x 6"H, has heavy-duty rollers, a padlock hasp and 250-lbs. capacity. All-welded unit has a fixed height of 34".

D x W	Model No.	Wt.
36 x 72	WW-3672-2HD	365



Model
WW-3672-2HD

Extra Heavy Duty Welded Steel Workbench

15,000 lbs. Capacity

These all welded extra heavy duty workbenches are designed for heavy duty uses. The workbench top is 7 gauge steel and is supported by a frame of 3" x 1-1/2" structural C channel. The legs are constructed from the 3" C channel and are welded to the top with 7 gauge gussets. 12 gauge lower shelf is 22" deep and holds 500 lbs. Foot pads with 5/8" diameter anchor holes. Clearance below the lower shelf is 4-1/2" to allow fork access. Top height is 34". Gray powder coat finish.

Size D x W	Capacity	Model No.	Wt.
36 x 60 x 34	15,000	WX-3660-34	348
36 x 72 x 34	15,000	WX-3672-34	396
36 x 84 x 34	15,000	WX-3684-34	482
42 x 84 x 34	15,000	WX-4284-34	532



Model
WX-4284



Underside supporting frame

Heavy-Duty Cabinet Workbench

10,000 lbs. Capacity

Top is reinforced 7 gauge steel with edges formed to a comfortable radius. Legs are 2" x 2" x 1/4" angle with footpads & lag holes. Doors and enclosure are 12 gauge, keyed locking handle and 3 point locking mechanism for security. Each 250 lb. capacity Drawer measures 26"W x 20"D x 6"H., has heavy duty rollers, a padlock hasp and full-width recessed handle. Clearance under drawers is 16"H. Durable gray powder coat finish.


Top D x W	Cabinet Inside W x D	Cabinet Only	Wt.	Cabinet with 1 Drawer, Centered	Wt.
30 x 48	43 x 25	WWC-3048	318	WWC-3048-HD	357
30 x 60	55 x 25	WWC-3060	371	WWC-3060-HD	410
30 x 72	67 x 25	WWC-3072	430	WWC-3072-HD	469
36 x 72	67 x 31	WWC-3672	476	WWC-3672-HD	515
				with 2 Drawers	
30 x 72	67 x 25	—		WWC-3072-2HD	508
36 x 72	67 x 31	—		WWC-3672-2HD	554



Model
WWC-3672



Model
WWC-3672-2HD



Model
WST2-2448-36



Open Base Model
WST1-2448-36



Model
WSH2-2448-36

Fixed Height Welded Steel Workbenches

Capacities to 5000 lbs. UDL

Smooth 12 gauge steel top is double-reinforced with angle iron on the underside and gussets in the corners for exceptional strength and rigidity. Legs and lower braces are 1-1/2" x 1-1/2" x 3/16" thick angle iron. Legs have footpads with 5/8" hole for mounting to the floor. These all-welded units ship fully assembled and ready for immediate use. 36" overall height.

WORKBENCH WITH HALF LOWER SHELF – Half depth 12 gauge lower shelf with lip at rear provides room for additional storage while leaving ample room for legs when seated. Capacity 500 lbs.

WORKBENCH WITH OPEN BASE – Angle iron cross braces are centered to allow leg room on both sides.

SIZE D x W x H	Cap.	With Lower Shelf Model No.	Wt.	With Open Base Model No.	Wt.
24 x 48 x 36	5000	WST2-2448-36	109	WST1-2448-36	87
24 x 60 x 36	4500	WST2-2460-36	136	WST1-2460-36	109
30 x 48 x 36	5000	WST2-3048-36	124	WST1-3048-36	98
30 x 60 x 36	4500	WST2-3060-36	153	WST1-3060-36	121
30 x 72 x 36	4000	WST2-3072-36	186	WST1-3072-36	142
36 x 60 x 36	4500	WST2-3660-36	174	WST1-3660-36	136
36 x 72 x 36	4000	WST2-3672-36	201	WST1-3672-36	157
36 x 84 x 36	3000	WST2-3684-36	224	WST1-3684-36	177

HARDBOARD OVER STEEL TOP – 1/4" Hardboard surface attached directly over 12 gauge steel top. Hardboard will help to deaden the sound of heavy blows and metal to metal contact. Hardboard is a more "forgiving" surface than steel and will help protect parts.

SIZE D x W x H	Cap.	With Lower Shelf Model No.	Wt.	With Open Base Model No.	Wt.
24 x 48 x 36	5000	WSH2-2448-36	116	WSH1-2448-36	94
30 x 48 x 36	5000	WSH2-3048-36	132	WSH1-3048-36	106
36 x 60 x 36	4500	WSH2-3660-36	186	WSH1-3660-36	147
36 x 72 x 36	4000	WSH2-3672-36	216	WSH1-3672-36	172
36 x 84 x 36	3000	WSH2-3684-36	244	WSH1-3684-36	197

OPTIONS AVAILABLE

Riser Shelf
12" high x 10" deep. -R

Locking Drawer
13" W x 17" D x 4-1/2" H
(Mounted on right side). -DR





Stainless Steel Top Welded Workbenches

Combine the strength of a welded steel table with corrosion resistance of Stainless Steel! 16 gauge Type 304 Stainless Steel with a #4 finish is applied securely to the 12 gauge steel top. The lower shelf and remaining components have a durable gray powder coat finish. The stainless steel surface provides superior chemical, corrosion, and rust resistance without sacrificing overall strength.

SIZE D x W x H	Cap.	Model No.	Wt.
Fixed Height Models - 36" Overall Height			
30 x 48	5000	WSS2-3048-36	153
30 x 60	4500	WSS2-3060-36	188
30 x 72	4000	WSS2-3072-36	229
Adjustable Height Models - 27" - 41" High in 2" Increments			
30 x 48	5000	WSS2-3048-AH	155
30 x 60	4500	WSS2-3060-AH	190
30 x 72	4000	WSS2-3072-AH	231



**Model
WSS2-3048-AH**



**Model
WSS2-3048-36**

Adjustable Height Welded Workbenches

Capacities to 5000 lbs. UDL

Legs are adjustable from 27" to 41" high on 2" centers. 12 gauge steel top is double-reinforced with angle iron on the underside and gussets in the corners for exceptional strength and rigidity. These all-welded units ship fully assembled and ready for immediate use.

Steel Top

SIZE D x W	Cap.	With Lower Shelf Model No.	Wt.	With Open Base Model No.	Wt.
24 x 48	5000	WST2-2448-AH	111	WST1-2448-AH	89
24 x 60	4500	WST2-2460-AH	138	WST1-2460-AH	111
30 x 48	5000	WST2-3048-AH	126	WST1-3048-AH	100
30 x 60	4500	WST2-3060-AH	155	WST1-3060-AH	123
30 x 72	4000	WST2-3072-AH	188	WST1-3072-AH	144
36 x 60	4500	WST2-3660-AH	176	WST1-3660-AH	138
36 x 72	4000	WST2-3672-AH	203	WST1-3672-AH	159
36 x 84	3000	WST2-3684-AH	225	WST1-3684-AH	179




**Model
WST2-3060-AH**



**Model
WSH2-2448-AH**

Hardboard over Steel Top

SIZE D x W	Cap.	With Lower Shelf Model No.	Wt.	With Open Base Model No.	Wt.
24 x 48	5000	WSH2-2448-AH	118	WSH1-2448-AH	96
30 x 48	5000	WSH2-3048-AH	134	WSH1-3048-AH	108
36 x 60	4500	WSH2-3660-AH	188	WSH1-3660-AH	149
36 x 72	4000	WSH2-3672-AH	218	WSH1-3672-AH	174
36 x 84	3000	WSH2-3684-AH	246	WSH1-3684-AH	199



Model
WF-3672-AH



Legs Folded

Folding Leg Welded Workbenches

3000 lbs. Capacity

Folding legs are hinged and welded to the top, and can be folded down for transport or storage by removing wing nut that secures leg braces. Legs adjust in 2" increments

Steel Top – Welded 12 gauge steel tops are channel reinforced for added strength and durability. 28" to 42" high.

D x W	Model No.	Wt.
30 x 72	WF-3072-AH	139
36 x 72	WF-3672-AH	152
36 x 84	WF-3684-AH	171

Hardboard over Steel Top – 1/4" hardboard over 12 gauge steel. 28-1/4" to 42-1/4" high.

D x W	Model No.	Wt.
36 x 72	WFH-3672-AH	167
36 x 84	WFH-3684-AH	192

Butcher Block Top

3000 lbs. Capacity

1-3/4" thick. 29-3/4" to 43-3/4" high.

D x W	Model No.	Wt.
30 x 72	WFJ-3072-AH	147

Continuous Width Production Tables

3000 lbs. Capacity

Ideal for assembly lines. No stringer means working from both sides!

Heavy-duty 12 gauge tops are available in either 30" or 36" depth with reinforced understructure and strengthening gussets. Tops come in 4, 5, and 6 ft. widths to allow for an infinitely continuous work surface in 1 ft. increments (excludes 7 ft.). Starter kit includes (1) table top, (2) leg sets, and (4) gussets. Each additional Add-on kit includes (1) table top, (1) leg set and (4) gussets. Legs and gussets bolt to table-tops with included hardware. Ships flat. Overall height is 36". Gray powder coated finish.




WSE-STARTER



WSE-ADD-ON

STARTER KIT				ADD-ON KIT			
includes (1) table top, (2) leg sets, and (4) gussets				includes (1) table top (1) leg set, and (4) gussets			
Depth	Width	Model No.	Wt.	Depth	Width	Model No.	Wt.
30"	4 ft.	WSE3048-STARTER	126	30"	4 ft.	WSE3048-ADD-ON	126
	5 ft.	WSE3060-STARTER	138		5 ft.	WSE3060-ADD-ON	138
	6 ft.	WSE3072-STARTER	153		6 ft.	WSE3072-ADD-ON	153
36"	4 ft.	WSE3648-STARTER	140	36"	4 ft.	WSE3648-ADD-ON	140
	5 ft.	WSE3660-STARTER	154		5 ft.	WSE3660-ADD-ON	154
	6 ft.	WSE3672-STARTER	170		6 ft.	WSE3672-ADD-ON	170



Butcher Block Top Tables

These 1-3/4" thick butcher block tops have a two-coat catalyzed varnish finish, and are attached to an all-welded, angle steel frame for unmatched rigidity and strength.

The impact resistant, hardwood tops are non-conductive, resist damage from heavy blows, and provide an extremely durable, yet "forgiving" work surface. All models are fully assembled and ready for immediate use.

SWIVEL CASTER MODELS – 3" x 1-1/4" hard rubber casters with wheel brakes 35" high. 1000 lbs. capacity.

LEG LEVELER MODELS – Adjustable from 32" to 35" high. 2000 lbs. capacity.

Size D x W	CASTERS Model No.	Wt.	LEG LEVELERS Model No.	Wt.
TABLES WITH OPEN ANGLE FRAME BASE				
24 x 24	WT-2424-3R	65	WT-2424-LL	60
24 x 36	WT-2436-3R	85	WT-2436-LL	80
24 x 48	WT-2448-3R	105	WT-2448-LL	100
30 x 48	WT-3048-3R	121	WT-3048-LL	116
30 x 60	WT-3060-3R	151	WT-3060-LL	144
30 x 72	WT-3072-3R	174	WT-3072-LL	169
TABLES WITH 12 GAUGE STEEL LOWER SHELF				
24 x 24	WTS-2424-3R	76	WTS-2424-LL	71
24 x 36	WTS-2436-3R	102	WTS-2436-LL	97
24 x 48	WTS-2448-3R	128	WTS-2448-LL	123
30 x 48	WTS-3048-3R	153	WTS-3048-LL	148
30 x 60	WTS-3060-3R	162	WTS-3060-LL	169
30 x 72	WTS-3072-3R	197	WTS-3072-LL	192

Add for Locking Storage Drawer Options (Right Side Mount)

-DR Single -2DR Double (Stacked)

Drawer measures 13"W x 17"D x 4-1/2"H



Model
WT-2448-LL



Model
WTS-2448-3R-2DR

Welded Steel Workbenches with Butcher Block Tops

3000 lbs. Capacity


Units ship fully assembled - ready for immediate use

Butcher Block top is 1-3/4" thick, helps deaden sound, absorbs impact. Replaceable top is attached to an all-welded steel frame. Half lower shelf constructed of 12 gauge steel with 3" high lip at rear. All-welded units ship fully assembled and ready for immediate use. Available in Fixed and Adjustable heights, and with optional factory installed Locking Drawer that measures 13"W x 17"D x 4-1/2"H (Right Side Mount).

SIZE D x W	Without Drawer Model No.	Wt.	With Drawer Model No.	Wt.
Fixed Height Models - 37-3/4" Overall Height				
24 x 48	WSJ2-2448-36	125	WSJ2-2448-36-DR	148
30 x 48	WSJ2-3048-36	141	WSJ2-3048-36-DR	164
30 x 60	WSJ2-3060-36	169	WSJ2-3060-36-DR	193
30 x 72	WSJ2-3072-36	194	WSJ2-3072-36-DR	219
Adjustable Height Models - 28-3/4" to 42-3/4" High in 2" increments				
24 x 48	WSJ2-2448-AH	129	WSJ2-2448-AH-DR	152
30 x 48	WSJ2-3048-AH	145	WSJ2-3048-AH-DR	168
30 x 60	WSJ2-3060-AH	173	WSJ2-3060-AH-DR	197
30 x 72	WSJ2-3072-AH	199	WSJ2-3072-AH-DR	224



Model
WSJ2-3060-AH-DR



Model
MT1-2436-30

OPTIONS AVAILABLE

Swivel casters with wheel brakes,
3" rubber wheels (9 lbs.),
add: **-3R** to Model No.

*Note: Models with casters are same
overall height as those without casters on
Single Shelf Models. Capacity 500 lbs.*

Accessory Drawer –
13"W x 15"D x 5"H (10 lbs.),
add: **-ED** to Model No.



Steel-Top Machine Tables

2000 lbs. Capacity

12 gauge smooth steel top won't warp or splinter. Legs and braces are 1-1/2" x 1-1/2" angle iron. All-welded units ship set up and ready for immediate use. Available in a variety of sizes and heights.

Top D x W	Height	Model	Wt.
18 x 24	18	MT1-1824-18	31
	24	MT1-1824-24	33
	30	MT1-1824-30	35
	36	MT1-1824-36	37
	42	MT1-1824-42	44
24 x 36	18	MT1-2436-18	48
	24	MT1-2436-24	50
	30	MT1-2436-30	52
	36	MT1-2436-36	55
	42	MT1-2436-42	58
24 x 48	18	MT1-2448-18	75
	24	MT1-2448-24	78
	30	MT1-2448-30	82
	36	MT1-2448-36	86
	42	MT1-2448-42	89

Multi-Shelf Machine Tables

2000 lbs. Capacity

All-welded units have 12 gauge shelves. Top shelf has flush edges, and reinforcement on larger sizes. Lower shelves have 1-1/2" retaining lip to contain small parts. Angle iron legs are 3/16" thick with 2-1/2" footpads.

Size D x W x H	2 Shelves 22" clearance	Wt.	3 Shelves 10-1/4" clearance	Wt.
18 x 24 x 32-1/2	MT1824-2	53	MT1824-3	70
18 x 32 x 32-1/2	MT1832-2	60	MT1832-3	81
24 x 36 x 32-1/2	MT2436-2	80	MT2436-3	111
24 x 48 x 32-1/2	MT2448-2	100	MT2448-3	140
24 x 60 x 32-1/2	MT2460-2	131	MT2460-3	183
30 x 48 x 32-1/2	MT3048-2	130	MT3048-3	180

Accessory Drawer - 13"W x 15"D x 5"H, add **-ED** to Model No.



Model
MT2436-2

OPTIONS AVAILABLE

**Swivel casters with
wheel brakes,**
3" rubber wheels (9 lbs.),
add: **-3R** to Model No.
(Add 4" to overall height
on Multi-Shelf models.)
500 lbs. Capacity



Model
MT1824-2-3R

Adjustable Height
Leg Levelers - Adjusts
standard table height
from +1" to +4",
add **-LL** to Model No.
2000 lbs. Capacity



Model
MT2436-3-LL



Heavy-Duty Machine Tables

10,000 lbs. Capacity

Top is formed from 3/16" thick steel for the heaviest applications, and reinforced with 2" x 2" x 3/16" angle iron. Legs are 2" x 2" x 1/4" angle and have 2-1/2" foot-pads with 5/8" diameter lag holes. All-welded construction, gray powder coated finish.

Top D x W	Height	Model No.	Wt.
16 x 30	24	MTH1-1630-24	96
	30	MTH1-1630-30	103
	36	MTH1-1630-36	109
22 x 30	24	MTH1-2230-24	102
	30	MTH1-2230-30	108
	36	MTH1-2230-36	114
28 x 30	24	MTH1-2830-24	116
	30	MTH1-2830-30	122
	36	MTH1-2830-36	128
30 x 36	24	MTH1-3036-24	134
	30	MTH1-3036-30	140
	36	MTH1-3036-36	147
30 x 48	24	MTH1-3048-24	164
	30	MTH1-3048-30	170
	36	MTH1-3048-36	179
30 x 60	24	MTH1-3060-24	191
	30	MTH1-3060-30	197
	36	MTH1-3060-36	203



**Model
MTH1-2830-30**

Adjustable Height Heavy-Duty Machine Table

10,000 lbs. Capacity

7 gauge steel top and heavy 2" x 2" leg construction are used to make a Heavy-Duty Machine Table that will meet the most demanding application. Adjustable legs allow table height positioning from 30" to 37" high with 1" increments. Durable gray powder coated finish.

Size	Model No.	Wt.
16 x 30	MTH1-1630-AH	115
22 x 30	MTH1-2230-AH	124
28 x 30	MTH1-2830-AH	141
30 x 36	MTH1-3036-AH	159
30 x 48	MTH1-3048-AH	188
30 x 60	MTH1-3060-AH	212



**Model
MTH1-2830-AH**

Spill-Control Platforms

Heavy gauge steel construction holds up in applications where plastic units just won't do, either for durability reasons, or when materials being stored are not compatible with plastic. Welded steel bar grating is removable for easy clean-up. Drip Channels "hook" units of same heights together, help prevent drainage between units. Optional Ramps available in 2 heights. All models help you comply with EPA and OSHA requirements; models with 66 and 99 gallon capacity help you comply with Uniform Fire Code.



Model
SSB-5176

Model
SSB-5151



Model
SSB-5125

LOW-PROFILE MODELS

Low platform height offers easy access to stored materials, easier loading and unloading of drums.

	SUMP CAP.	DIMENSIONS W x L x H	Model No.	Ship Wt.	Capacity Lbs. UDL
2-Drum	33 gal.	51 x 26 x 6.5	SSB-5125	125	3000
2-Drum	66 gal.	51 x 26 x 12	SSB-5125-66	158	3000
4-Drum	66 gal.	51 x 51 x 6.5	SSB-5151	233	6000
6-Drum	99 gal.	76 x 51 x 6.5	SSB-5176	358	9000
Ramp*	–	33 x 36 x 6.5	SSB-RAMP	70	1500
Drip Channels	–	25-1/2" L	DCC	2	–

*Ramp not for use with SSB-5125-66



All platforms feature full height internal support channels with flow-through vents.

FORKLIFTABLE MODELS

4-way fork entry with 4" underclearance.

	SUMP CAP.	DIMENSIONS W x L x H	Model No.	Ship Wt.	Capacity Lbs. UDL
2-Drum	33 gal.	51 x 26 x 10.5	SST-5125	138	2000
2-Drum	66 gal.	51 x 26 x 16	SST-5125-66	171	2000
4-Drum	66 gal.	51 x 51 x 10.5	SST-5151	259	4000
6-Drum	99 gal.	76 x 51 x 10.5	SST-5176	381	6000
Ramp*	–	33 x 42 x 10.5	SST-RAMP	95	1500
Drip Channels	–	25-1/2" L	DCC	2	–

*Ramp not for use with SST-5125-66



4-Drum Forkliftable



6-Drum Forkliftable



**4-Drum Forkliftable
with Ramp**

IBC Containment & Dispensing Station

Heavy gauge steel construction for durability and extended life. Large 400 gallon sump capacity with 10,000 lbs. load capacity. Steel grating deck panels are easily removable for cleaning. Includes drain plug and grounding screw. Helps you comply with EPA requirements.

SINGLE IBC UNIT

Large deck surface has room for additional storage. Three-piece steel grating deck is 29" high. "Convertible" deck allows IBC to be positioned for internal dispensing within sump area. Included pail holder shelf attaches conveniently to inside or outside of sump.

Model No.	Overall Size	Capacity	Wt. (lbs.)
SST-IBC	51"W x 76"L x 29"H	400 gal	625

Right: Positioned widthwise, Pail Shelf can be hung outside of sump, allowing extra storage space on deck.



**Model
SST-IBC**

DOUBLE IBC UNIT

Convenience of storing 2 IBC's side by side, and a lower profile for easier access. Four piece removable grating deck is 23" high. Includes 2 removable pail holder shelves.

Model No.	Overall Size	Capacity	Wt. (lbs.)
SST-IBC-2	51"W x 99"L x 23"H	400 gal	702



**Model
SST-IBC-2**

Spill Control Platform with Drum Rack

Heavy gauge steel construction in a drum storage system that position the drums ready for dispensing. 1- Drum unit has 33 gallon sump capacity and 2- Drum unit has 66 gallon sump capacity. Both include 4 way forkliftable access.

Drum Capacity	Dimensions W x L x H	Model No.	Wt.
1-Drum	26 x 51 x 22	SST-5125-1D	105
2-Drum	51 x 51 x 22	SST-5151-2D	170



**Model
SST-5151-2D**



Model
SSB-5125-6PYBK

2-Drum Spill Control Cart

Durable welded steel construction – stronger than plastic and non-combustible. Sump has removable steel bar grating deck for easy clean-ups. Chemical resistant 6" polyurethane casters, 2 rigid and 2 swivel with wheel brakes to help prevent unwanted movement. Removable pipe handle with cross brace extends 25" above top of sump.

Deck W x L x H	Model No.	Capacity	Wt.
26 x 51 x 14	SSB-5125-6PYBK	33 gallon	170
26 x 51 x 19-1/2	SSB512566-6PYBK	66 gallon	203



Model
SSB-5151-6PY-FL

4-Drum Spill Control Cart with Floor Lock

This mobile containment cart allows you to store and transport up to 4-55 gallon drums. The Floor Lock helps prevent unwanted movement once the cart is in position. All-welded steel construction with a 66 gallon sump capacity and removable bar grating for easy clean-ups. 2 swivel, 2 rigid 6" x 2" polyurethane casters. Removable pipe handle with cross braces is 36" wide.

Deck W x L x H	Model No.	Wt.
51 x 51 x 15-1/2	SSB-5151-6PYFL	301



Model
SPB

Safety Post Barricade

with 10' of Chain

All-welded steel barricade posts for use in your plant to temporarily mark work zones. Each barricade post is 42" high with an open ring to connect control chains. Durable safety yellow powder coated for high visibility.

	Model No.	Wt.
Barricade Post	SPB	18
10' Chain with 2 snaps	SPB-C120	3

Adjustable Spring Safety Gate

Adjustable width 22-1/2" to 36". Set screws secure at desired width. Stainless steel torsion spring closes the gate automatically. Spring is tension adjustable, and reversible. Meets OSHA 1910.23a requirements. Powder coated red finish (except spring). Outside tubing 1.37" OD x 12 gauge wall. Mounting channel is 2" x 1" with two mounting holes (hardware not included).

Overall W x D x H	Model No.	Wt.
24 x 3 x 24	◆ SGS-R	18



Model
SGS-R

ADJUSTABLE SPRING SAFETY GATE WITH EASY MOUNT KIT

Includes easy mount kit to mount directly on your existing hand rail. Two bolt together clamps hold unit securely to hand rail. No drilling required.

Overall W x D x H	Model No.	Wt.
24 x 3 x 24	◆ SGS-R-EM	20



Model
SGS-R-EM

Hydraulic Arm Safety Gate

Adjustable width 15" to 31". Set screw used to secure at desired width. Gate arm uses hydraulic pressure to smoothly close without slamming. Closing tension is adjustable. Mounting plate is 1-3/8" x 6" with two mounting holes (hardware not included). Mount to the left only. Durable powder coat red finish. Meets OSHA 1910.23a requirements.

Overall W x D x H	Model No.	Wt.
21 x 3-1/2 x 6	◆ SGH-R	10



Model
SGH-R

Barrier Railings

Available in 4', 5', and 6' Lengths

Use these in plant modular railing systems to mark aisle ways and guard equipment. Each section is made from 1.3" diameter steel tube with all-welded construction. All rails are 42" high. Powder coated in safety yellow. Order mounting posts MP-1 or MP-2 as needed to build your unique railing.

Length	Model No.	Wt.
48"	GR-48	21
60"	GR-60	24
72"	GR-72	26
1 Hole Base	MP-1	2
2 Hole Base	MP-2	4



Model
GR-48



Model
MP-1


Model
MP-2



**Model
GSH-36W-70H**



**Model
GSU-36W-70H**



**Model
GSC-72W-70H**

Gas Cylinder Storage Units

All-welded units ship set up. 13 gauge expanded metal for ventilation and visibility. Sloped roof is sheet steel. Angle frame with back panels reinforced for protection against slamming cylinders. Includes padlock hasp. Legs have 1/2" hole for bolting to floor. Helps meet OSHA 1910 requirements and NFPA standards. Yellow powder coated finish.

Model No.	Cylinder Capacity	Overall W x D x H	Wt.
HORIZONTAL CYLINDER STORAGE CABINETS			
For 20-43 lbs. LPG Cylinders Up To 13" Diameter			
GSH-36W-40H	4	36 x 38 x 40	211
GSH-36W-70H	8	36 x 38 x 70	313
GSH-72W-70H	16	72 x 38 x 70	544
UPRIGHT CYLINDER STORAGE CABINETS			
GSU-36W-70H	5-15	36 x 38 x 70	218
GSU-72W-70H	10-30	72 x 38 x 70	346
COMBINATION UPRIGHT & HORIZONTAL STORAGE			
GSC-72W-70H	8 Horizontal & 5-15 Upright	72 x 38 x 70	455



**Model
GSU2-72W-70H**

Gas Cylinder Storage Units

Two compartments clearly labelled to separate your "Full" and "Empty" gas cylinders. Eliminates costly downtime caused by running out of "full" cylinders or installing an empty cylinder. Each compartment holds 5-15 upright cylinders. All welded construction with powder coated finish ships set up. Measures 72" W x 38" D x 70" H.

Model No.	Cylinder Capacity	Overall W x D x H	Wt.
GSU2-72W-70H	5-15 Upright in Each Compartment 10-30 Total	72 x 38 x 70	424



**Model
GSC-3636-70**

Industrial Gas Cylinder Cage

Designed to securely store industrial lift-truck propane tanks. All-welded cage has a 12 gauge top. Stores up to 12 cylinders horizontally with lockable door. Accommodates 20, 33, and 44 lb propane tanks. Lag-holes in footpads for mounting to floor. Powder coated safety-yellow finish. High-visibility "Danger/Flammable" sign. Helps meet OSHA 1910 requirements.

Cylinder Capacity	D x W x H	Model No.	Wt.
8	36 x 36 x 70	GSC-3636-70	220
12	36 x 48 x 70	GSC-3648-70	275

Welding Cart

Heavy-duty all-welded Welding Cart. Tank platform is 10"D x 20" W and has low ground clearance for loading cylinder(s) without the strain of lifting. Includes a heavy chain for securing cylinders. Bottom 12 gauge shelf measures 20" x 29" and accommodates most medium to large power sources. Top shelf measures 20" x 16" - perfect for feeders - with hooks on either side for winding cables. 2 rigid and 2 swivel total lock casters with 5" polyurethane wheels. Rigid casters mounted outside the tank platform for maximum stability. Durable powder coated gray finish.

Model No.	Overall L x W	Wt.
WC-2039-5PYTL	39 x 25	98



Model
WC-2039-5PYTL

Gas Cylinder Truck

Capacities (6) or (8) 9-1/4" Cylinders

Move bulky gas cylinders by hand with this heavy-duty steel truck. Thick 7 gauge deck is reinforced with 1-1/2" square tubing and substantial 7 gauge gussets. Square tube uprights support 1/4" thick corral dividers. Heavy-duty chain secures the cylinders during transport. Low deck for easy loading and unloading. 2 swivel and 2 rigid casters with 8" phenolic wheels. Loop handle at swivel end. Overall height (empty) is 48".

Cylinder Capacity	Overall W x D	Model No.	Wt.
6	24 x 50	GST-6-8PH	200
8	24 x 60	GST-8-8PH	263



Model
GST-8-8PH

Gas Cylinder Pallet

Capacities (4), (6) or (8) 9-1/4" Cylinders

Load bulky gas cylinders for transport by forklift with this heavy-duty steel platform. Thick 7 gauge formed deck is flanked by solid fork pockets that run the length of the unit. Angle iron uprights with angle gussets for strength. Dividers with loop handles secure the cylinders during transport. Overall height (empty) is 41".

Cylinder Capacity	Overall W x D	Model No.	Wt.
4	33 x 25	GSP-4	140
6	33 x 36	GSP-6	180
8	33 x 47	GSP-8	220



Model
GSP-4



**Model
TW-40-10**



**Dual Handle
Model TW-42**



TW-40

Single cylinder cart features 1.05" O.D. tubing for strength. Nose plate is full 8" deep x 14" wide. Support chain is securely welded to frame to hold cylinder. Equipped with semi-pneumatic or pneumatic wheels. Overall height 47".

Model No.	Wheel Description	Cap. Lbs.	Wt.
Continuous Handle, 47" High			
♦ TW-40-10	10" x 2.75" Semi-Pneumatic	800	36
♦ TW-40-10P	10" x 3.5" Pneumatic	800	34
♦ TW-40-10FF	10" x 3.5" Flat-Free	600	35
Dual Handle, 49" High			
TW-42-10	10" x 2.75" Semi-Pneumatic	800	36
TW-42-10P	10" x 3.5" Pneumatic	800	34
TW-42-10FF	10" x 3.5" Flat-Free	600	35



TW-30

Four-wheel cart holds 2 standard 9" diameter cylinders. Equipped with 2 swivel casters and 2 large load wheels. Includes a removable tool tray measuring 12"W x 4"L x 2"D, 2 rod holders, and safety chains to help secure cylinders. Overall dimensions 21-1/2"W x 36"L x 40"H.

Model No.	Load Wheels	Casters	Wt.
♦ TW-30	10" x 2.75" Solid Cushion Rubber	4" x 1-1/4" Rubber	57



**Model
TW-70**



TW-70

Tilt-back truck stabilizes the load on 4 wheels for less effort when transporting cylinders. Safety chains secure cylinder to truck. 800 lbs. capacity.

Model No.	Wheel Size	Casters	Wt.
TW-70-8SR-3R	8" x 2.5" Solid Cushion Rubber	3" x 1-1/4" Rubber	48



**Model
TW-50-16P**

TW-50

Popular double cylinder truck features a 14" x 24" base plate braced underneath with angle iron. Lip on back assists prevention of cylinder movement. Continuous handle is strong and safe. Furnished with large tool tray. Overall height 48".

Model No.	Wheel Size	Load Cap. Lbs.	Wt.
TW-50-10	10" x 2.75" Semi-pneumatic	800	63
TW-50-12P	12" x 3" Pneumatic	800	66
TW-50-16P	16" x 4" Pneumatic	800	69

60" Tall Hand Truck with Foot Kick (Patent Pending)

Carry more and make fewer trips with this extended height hand truck. The foot kick gives you extra leverage on heavy loads when starting. Simply tilt the hand truck back while using your foot to push the base forward. You will be amazed how much easier it is to start out. Frame stands 60" tall. The large 13-1/2" deep x 1/4" thick nose plate with tapered front edge measures 16" at the base. Frame is made from 1.05" diameter 14 gauge steel tubing and is fully welded for strength and rigidity. Wheel guards protect the wheels from the load.

Model No.	Wheel Description	Cap. Lbs.	Wt.
TF-370-8S	8" x 2.50" Solid Rubber Tire	800	48
TF-370-10	10" x 2.75" Solid Rubber Tire	800	52
TF-370-10P	10" x 3.50" Pneumatic	800	50
TF-370-10FF	10" x 3.50" Flat-Free	600	51



**Model
TF-370-10**



Tilt Back Hand Truck

Tilt Back style design provides full support under load making moving heavy loads a breeze. "Hands Free" operation allows the operator to open doors without having to lower the load as with typical hand trucks.

Model No.	Wheel Description	Cap. Lbs.	Wt.
T-400-10-4R	10" x 2.75" Solid Rubber Tire	800	51
T-400-10P-4R	10" x 3.50" Pneumatic	800	49
T-400-10FF-4R	10" x 3.50" Flat-Free	600	50



**Model
T-400-10-4R**

Super-Size Hand Truck

Extra large 1/4" thick steel nose plate measures 24"W x 12"D. Oversized frame is 55" tall and constructed of 1-5/16" diameter 12 gauge steel tubing. Pneumatic wheels are 12" x 3-1/2", tube type, with 4 Ply Rating and 1" roller bearings. Durable green powder coat finish.

Model No.	Wheel Description	Cap. Lbs.	Wt.
T-1000-12P	12" x 3.50" Pneumatic	800	85



**Model
T1000-12P**





T-360 SERIES
Continuous Handle, 47" High



T-362 SERIES
Dual Handle, 49" High



T-364 SERIES
Loop Handle, 49" High

Shovel Nose Truck

Large 1/4" tapered nose plate is 13-1/2" deep, widens to 16" at rear. Beveled leading edge is easier to slide under loads. Frame and extra high 29" stair glides are 1.05" 14 gauge tubing for strength and rigidity. Wheel guards keep loads away from wheels. All frame styles feature 4 curved ribs with vertical center brace and zinc plated adjustable D-Axle.

T-360 SERIES

Model No.	Wheel Description	Cap. lbs.	Wt.
◆ T-360-8S	8" x 2.50" Solid Rubber Tire	800	43
◆ T-360-10	10" x 2.75" Solid Rubber Tire	800	48
◆ T-360-10P	10" x 3.50" Pneumatic	800	46
◆ T-360-10FF	10" x 3.50" Flat-Free	600	47

Foot Kick option available, change prefix from T- to TF-

T-362 SERIES

Model No.	Wheel Description	Cap. lbs.	Wt.
◆ T-362-8S	8" x 2.50" Solid Rubber Tire	800	43
◆ T-362-10	10" x 2.75" Solid Rubber Tire	800	48
◆ T-362-10P	10" x 3.50" Pneumatic	800	46
◆ T-362-10FF	10" x 3.50" Flat-Free	600	47

Foot Kick option available, change prefix from T- to TF-

T-364 SERIES

Model No.	Wheel Description	Cap. lbs.	Wt.
◆ T-364-8S	8" x 2.50" Solid Rubber Tire	800	44
◆ T-364-10	10" x 2.75" Solid Rubber Tire	800	49
◆ T-364-10P	10" x 3.50" Pneumatic	800	47
◆ T-364-10FF	10" x 3.50" Flat-Free	600	48

Foot Kick option available, change prefix from T- to TF-

WHEELS



WHEEL NO. 8S
Solid rubber
SIZE: 8" x 2.5"
Capacity: 400 lbs.



WHEEL NO. 10
Solid rubber
SIZE: 10" x 2.75"
Capacity: 400 lbs.



WHEEL NO. 10P
Full pneumatic,
4 ply tube type
SIZE: 10" x 3.5"



WHEEL NO. 10FF
Flat-Free
Microcellular Foam
SIZE: 10" x 3.5"

ALL
SHIP
UPS

12" Reinforced Nose Trucks

- **12" DEEP x 14" WIDE REINFORCED NOSE PLATE** – safely handles larger, bulky loads.
- **10 YEAR GUARANTEED NOSE PLATE**
- **4 CURVED RIBS WITH VERTICAL CENTER STRAP**
- **HEAVY 1.05" 14 gauge TUBULAR STEEL** for added strength to frame and stair glides.
- **EXTRA-HIGH 29" STAIR GLIDES** provide rigidity and longer frame life.
- **ZINC PLATED "D" AXLE IS INTERCHANGEABLE IN TRI-HOLE AXLE BRACKET**

T-200 SERIES

Model No.	Wheel Description	Cap. lbs.	Wt.
◆ T-200-8S	8" x 2.50" Solid Rubber Tire	800	34
◆ T-200-10	10" x 2.75" Solid Rubber Tire	800	38
◆ T-200-10P	10" x 3.50" Pneumatic	800	36
◆ T-200-10FF	10" x 3.50" Flat-Free	600	37

Foot Kick option available, change prefix from **T-** to **TF-**

T-220 SERIES


Model No.	Wheel Description	Cap. lbs.	Wt.
◆ T-220-8S	8" x 2.50" Solid Rubber Tire	800	34
◆ T-220-10	10" x 2.75" Solid Rubber Tire	800	39
◆ T-220-10P	10" x 3.50" Pneumatic	800	37
◆ T-220-10FF	10" x 3.50" Flat-Free	600	38

Foot Kick option available, change prefix from **T-** to **TF-**

T-240 SERIES

Model No.	Wheel Description	Cap. lbs.	Wt.
◆ T-240-8S	8" x 2.50" Solid Rubber Tire	800	35
◆ T-240-10	10" x 2.75" Solid Rubber Tire	800	40
◆ T-240-10P	10" x 3.50" Pneumatic	800	38
◆ T-240-10FF	10" x 3.50" Flat-Free	600	39

Foot Kick option available, change prefix from **T-** to **TF-**



Foot Kick Option
(Patent Pending)

The foot kick gives you extra leverage on heavy loads. Simply tilt the hand truck back while using your foot to push the base forward.

To add a welded foot kick to your hand truck, change the prefix of the model number from:
T- to **TF-**

REINFORCED NOSE PLATE



All models with guaranteed nose plates are structurally reinforced for extra strength and longer life. Heavy-duty stair glides are flattened and extended under the nose plate, which virtually eliminates breakage.



T-200 SERIES
Continuous Handle, 47" High




T-220 SERIES
Dual Handle, 49" High



T-240 SERIES
Loop Handle, 49" High

ALL
SHIP
UPS

**STEEL HAND TRUCKS
WITH MUSCLE**

**INTERCHANGEABLE
D-AXLE BRACKET**

Special 3-hole axle bracket allows for placement of axle to accommodate different size wheels. D-shaped axle eliminates turning and wear of axle.



T-320 SERIES
Dual Handle, 49" High



T-132 SERIES
Continuous Handle, 47" High



T-182 SERIES
Loop Handle, 49" High

Industrial Strength Hand Trucks

- **8" DEEP x 14" WIDE NOSE PLATE**
- **4 CURVED RIBS WITH VERTICAL CENTER STRAP**
- **HEAVY 1.05" 14 gauge TUBULAR STEEL** for added strength to frame and stair glides.
- **EXTRA-HIGH 29" STAIR GLIDES** provide rigidity and longer frame life.
- **ZINC PLATED "D" AXLE IS INTERCHANGEABLE IN TRI-HOLE AXLE BRACKET**

T-132 SERIES

Model No.	Wheel Description	Cap. lbs.	Wt.
◆ T-132-8S	8" x 2.50" Solid Rubber Tire	800	33
◆ T-132-10	10" x 2.75" Solid Rubber Tire	800	37
◆ T-132-10P	10" x 3.50" Pneumatic	800	35
◆ T-132-10FF	10" x 3.50" Flat-Free	600	36

T-320 SERIES

Model No.	Wheel Description	Cap. lbs.	Wt.
◆ T-320-8S	8" x 2.50" Solid Rubber Tire	800	33
◆ T-320-10	10" x 2.75" Solid Rubber Tire	800	37
◆ T-320-10P	10" x 3.50" Pneumatic	800	35
◆ T-320-10FF	10" x 3.50" Flat-Free	600	36

T- 182 SERIES

Model No.	Wheel Description	Cap. lbs.	Wt.
◆ T-182-8S	8" x 2.50" Solid Rubber Tire	800	37
◆ T-182-10	10" x 2.75" Solid Rubber Tire	800	39
◆ T-182-10P	10" x 3.50" Pneumatic	800	37
◆ T-182-10FF	10" x 3.50" Flat-Free	600	38

WHEELS



WHEEL NO. 8S
Solid rubber
SIZE: 8" x 2.5"
Capacity: 400 lbs.



WHEEL NO. 10
Solid rubber
SIZE: 10" x 2.75"
Capacity: 400 lbs.




WHEEL NO. 10P
Full pneumatic,
4 ply tube type
SIZE: 10" x 3.5"



WHEEL NO. 10FF
Flat-Free
Microcellular Foam
SIZE: 10" x 3.5"

**ALL
SHIP
UPS**



Wheel Selection Guide

Polyurethane Wheels

Load Capacity Range:
300 – 1,000 lbs.

Characteristics: Easier rolling for higher capacities, long lasting, chemical resistant, non-marking and quiet operation. High strength polyurethane tread liquid cast and mechanically locked to a polymer or cast metal core. A polyurethane tread is superior for industrial, warehouse and institutional applications with a great combination of easy rolling and maneuverability under heavy load capacity while able to quietly roll over rough floor surfaces.



Mold-On Rubber Wheels

Load Capacity Range:
500 – 600 lbs.

Characteristics: Better load capacity, long lasting, cushion tread, absorbs shock and vibration, floor protection and quiet operation. Rubber tread vulcanized to metal core. A good combination of load capacity and cushion tread that easily and quietly rolls over rough floors. A great wheel choice for heavy industrial and warehouse applications.



Pneumatic Wheels

Load Capacity Range:
300 – 400 lbs.

Characteristics: Great cushion ride over rough floor surfaces, best option for traveling over small obstructions or outdoor applications. Best shock and vibration absorption.

Like an automotive tire, an air filled rubber tire on a metal hub is able to easily roll over uneven surfaces and bumps but does require air pressure management. Under heavy loads, the pneumatic tire profile will compress creating greater rolling resistance. Pneumatic wheels are ideal for handling fragile loads over rough surfaces.



Phenolic Wheels

Load Capacity Range:
900 – 1,250 lbs.

Characteristics: Best rolling for heavy load capacities, long lasting, chemical resistant, high temperature, non-marking for smooth floor surface. A solid one piece wheel that is high pressure molded with reinforced fiber-filled phenolic resin. A cost effective wheel best used for high capacity industrial and warehouse applications. Hard tread wheel offers the least rolling resistance on smooth floors, but does not absorb vibration over rough surfaces.



Solid Rubber Wheels

Load Capacity Range:
300 – 400 lbs.

Characteristics: Good load capacity, great for rough floor surfaces, puncture-proof, floor protection and quiet operation. Cushioned rubber tire over plastic hub that is more stable and easier to roll under heavy loads than pneumatic wheels. Sometimes referred to as a semi-pneumatic tire, these wheels are a rugged, maintenance-free (no air pressure to fill and maintain) and are an alternative to pneumatic wheels.



Flat Free Hand Truck Wheels

Load Capacity Range:
300 lbs.

Characteristics: All of the benefits of a pneumatic wheel without losing air or going flat. This non-marking tire is composed of a dense microcellular polyurethane foam that performs like a pneumatic tire, cushioning the load and rolling over rough surfaces more easily. Upgraded precision ball bearing improves rollability and extends life.



Wheel Specifications

Wheel Dia.	Tread Width	Wheel Type	Bearing I.D.	Centered Hub Model No.	Bearing I.D.	Offset Hub Model No.
5	1-1/4	Polyurethane	3/8" Ball	WHMP-05114		
6	2	Mold-On Rubber Polyurethane Phenolic	Roller	WHMS-0620 WHMP-0620 WHPL-0620		
8	2	Mold-On Rubber Polyurethane Phenolic	Roller	WHMS-0820 WHMP-0820 WHPL-0820		
8	2-1/2	Solid Rubber	3/4" Ball	WHSP-0825	5/8" Ball	WHSP-0825-0
9	3	Pneumatic 2.80/2.50-4	5/8" Ball	WHPN-0830		
10	2-3/4	Solid Rubber	5/8" Ball	WHSP-1027P-C	5/8" Ball	WHSP-1027-P
10	3-1/2	Pneumatic 4.10/3.50-4	5/8" Ball	WHPN-1035-C	5/8" Ball	WHPN-1035
10	3-1/2	Flat Free 4.10/3.50-4 Microcellular Foam			5/8" Ball (Precision)	WHFF-1035
12	2-1/2	Mold-On Rubber	1" Roller	WHMS-12250		
12	3-1/2	Pneumatic 4.10/3.50-6 Pneumatic 4.10/3.50-6	5/8" Ball 1" Roller	WHPN-1235 WHPN-1235-RB		
16	4	Pneumatic 4.80/4.00-8	1" Roller	WHPN-1640		



Little Giant Products

Manufactured by

Brennan Equipment & Mfg. Inc.

730 Central Ave., University Park, IL 60484

Phone (708) 534-5500 • Fax (708) 534-5520

www.LittleGiant-USA.com • sales@little-giant-carts.com

Toll Free 866-L G CARTS (866-542-2787)

SOLD ONLY THROUGH DEALERS

Contact your local Industrial Distributor,
or visit our website to locate a
Distributor in your area.

